SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XLIX.—No. 24. [NEW SERIES.] NEW YORK, DECEMBER 15, 1883. [$3.20 per Annum. [POSTAGE PREPAID.]

THE EQUATORIAL OF THE PARIS OBSERVATORY.

The accompanying engraving is the first representation that has been given of the remarkable instrument recently mounted at the Paris Observatory, and the ingenious arrangement of which is due to Mr. Loewy, the Subdirector of the establishment. It was begun under the administration of Mr. Delauny, was interrupted during the war, and has just been finished, thanks to further liberality on the part of Mr. Bischoffstein.

The equatorial is one of the essential instruments of astronomy. What is named thus is a telescope by means of which observations can be made on a star situated at any point whatever above the horizon, and which consequently allows such star to be followed during the whole period of its apparent motion, in such a way that nothing connected with the incidents that occur during its course, nor with the modifications that may take place in its form, luster, or dimensions, shall escape the attentive observer.

In order to answer the needs of modern astronomy, equatorials must be of gigantic size. As with cannons, each new apparatus possesses dimensions that are greater than those of the older ones, although we do not aim at celestial bodies in order to destroy them! Every one has seen, on the Observatory terrace, the cupola which protects the equatorial, and may thus judge of the size of the apparatus, although this is not of the greatest. Its weight is considerable, and this renders it hard to move, despite the simplicity and perfection of the mechanism by means of which it is maneuvered. The star under observation moves continuously in the heavens, and this necessitates a corresponding motion of the apparatus and observer, not only from the right to the left and *vice versa*, but downward and upward. Besides, the cupola itself must be set in motion and revolve around its axis, so that its aperture may be constantly opposite the telescope. Observation requires, then, to speak of the principal motions only, a motion of the telescope, of the observer, and of the cupola. When we add that the observer is obliged to sit or lie prostrate, sometimes in a very inconvenient position, it will be seen, on the one hand, that the duration of the observations becomes diminished by the length of time consumed in the maneuver, and, on the other, that the fatigue of the astronomer interferes with the accuracy of the observation.

Such inconveniences are so serious that, in certain cases (when, for example, it concerns a search for comets, where a great extent of space must be gone over), the astronomer is obliged to dispense with the use of large equatorials, and is reduced to the employment of smaller and less advantageous apparatus. But these are not the sole inconveniences, for there are others of a graver nature, such as a want of stability in large equatorials, so as to render it impossible to accurately measure great angular distances; the effects of flexion; and that getting out of center of the objective, which is so prejudicial to the sharpness of the image. We are thus in a position to appreciate the advantages of the new equatorial, which permits, as we shall see, (1) of the measurement of great angular distances, and (2) of making observations with relative ease and rapidity. Seated upon a stationary chair, independent of the support of the instrument, the astronomer is placed as if in front of his table, writing. The instrument obeys him, and not he the instrument.

The new telescope is bent at right angles. One part runs in the direction of the world's axis, and the other, which is perpendicular to it, consequently moves in the plane of the equator. At the extremity of this latter part there is a mirror, and at the elbow of the telescope, and in the interior, another one, both making with the axis an angle of 45°. These two mirrors are designed for sending from one to the other, and to the observer seated with his eye to the ocular, the image of the star to be observed.

The loss of light as a consequence of these successive reflections is scarcely perceptible. Any distortion of the images that might have resulted from the use of too thin mirrors has been avoided. So, as regards its optical qualities, the new equatorial is not surpassed by any of the telescopes of the Observatory. A double result is here attained: first, the possibility of measuring great angular distances, and second, that of the astronomer's exploring the entire heavens without moving, and while governing the apparatus personally.

One consequence of these happy arrangements is the suppression of the heavy, ugly, and costly cupola, this being replaced by a pavilion that occupies less space and is simpler in construction. It consists of a movable part that shelters that portion of the instrument that carries the objective, and of a fixed part wherein sits the observer. When it is desired to proceed with observations the movable part, which slides easily upon a railway, is shoved back. The extremity of the telescope that carries the objective is thus uncovered, while the astronomer, seated in the fixed part as if in his study, and sheltered from inclement weather, studies the infinitely great under the same conditions as the naturalist who examines the infinitely small with his microscope.

The optical part of the instrument was made by Messrs. Henry Brothers, and the mechanical by Messrs. Eichers & Gauthier.

Technical Description.—The body of the telescope is formed of two cast iron tubes mounted at right angles upon a rectangular parallelopipedon having a square base, and prolonged by a trunnion, A, on the side opposite that on which is fixed one of the tubes, with which it forms the horary axis of the instrument. At the upper part of this tube there is fixed a piece of bronze, which serves both as the upper trunnion of the axis and as a slide ring for the reception of the micrometer. This piece of bronze, which forms the extremity of the polar axis, rests, itself, in a bearing provided with trunnions adjusted in the uprights, E, which latter are fixed upon a cast iron base sealed into stone and isolated from the flooring. The instrument may be regulated in azimuth by stops, F, which act upon the bearing, E. The screws of these stops, on acting upon this bearing, move the polar axis from east to west. The trunnion, A, rests in a conical bush adjusted by screw in a slide, C, which may be moved by a screw in order to regulate the inclination of the axis. The point of the trunnion, A, is finished off with a piece of tempered steel, and bears on the tempered extremity of a screw that enters the bush. The effect of this screw is to limit the friction of the trunnion, A, in the bush. The system of friction rollers, D, which is held by a lever, D', serves likewise to ease the friction of the trunnion in its bush.

The horary circle, J, which is carried by the upper trunnion of the axis, gives the seconds of time by means of verniers, three in number, the reading being made through a movable lens, K. The declination circle, which is placed a little to the rear of the horary one, gives the ten seconds of an arc through verniers that are likewise three in number and connected by the lens, K. The alidade is fixed to the horary axis. The circle revolves upon an axis and is moved by a pinion, Y, that transmits the circular motion of the sleeve, R. A strong toothed wheel that gears with a pinion makes

(*Continued on page* 372.)

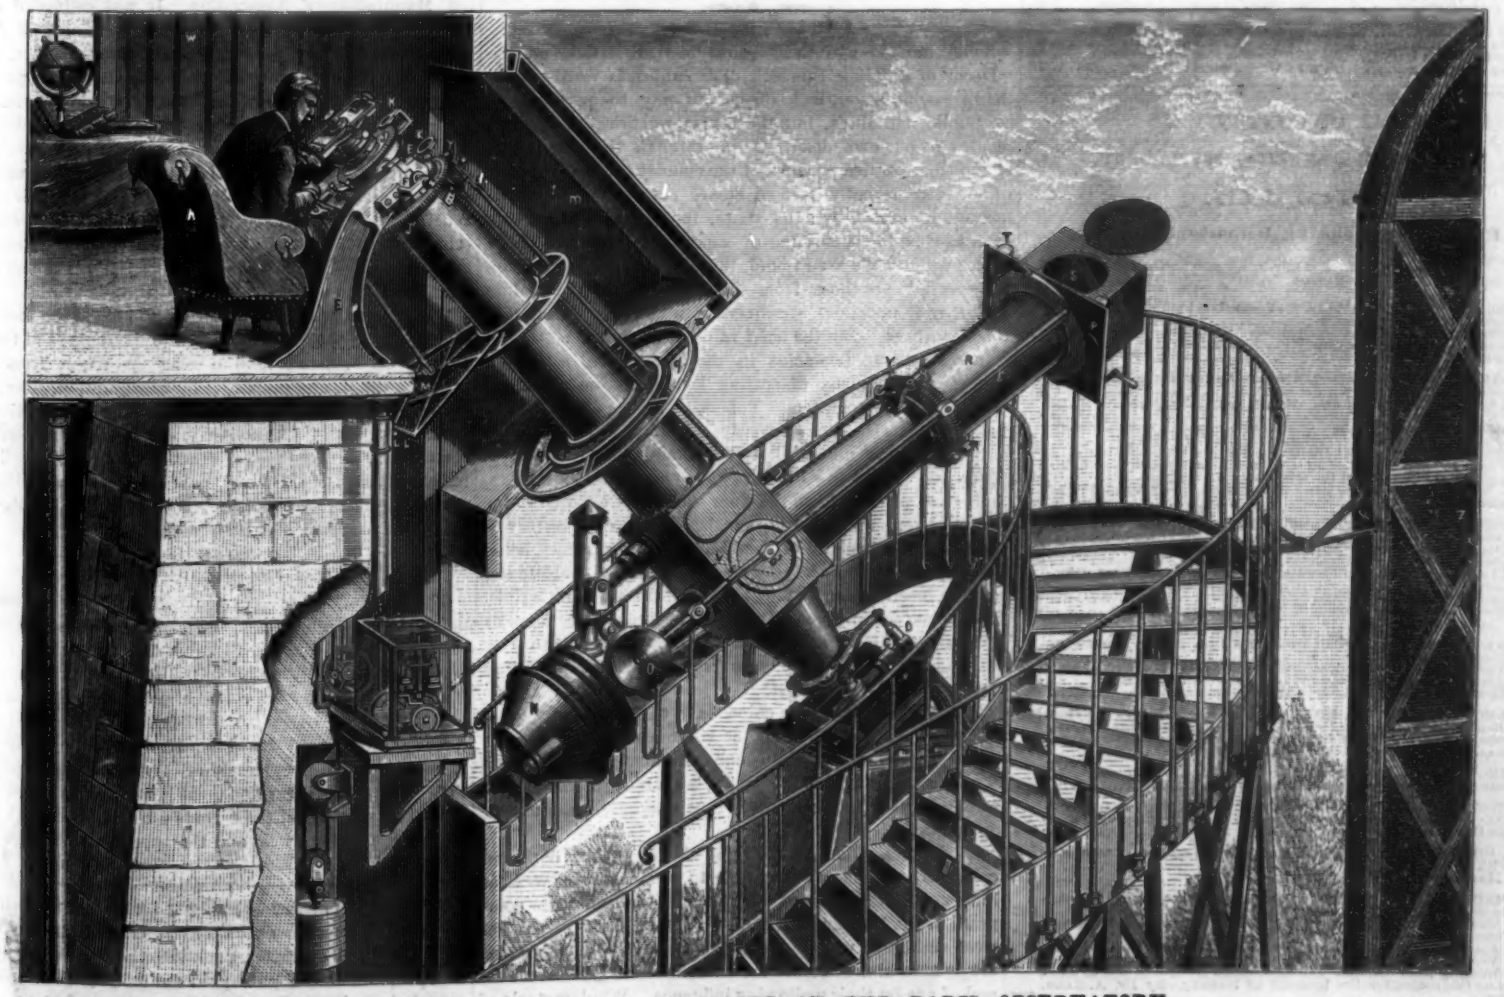

THE GREAT EQUATORIAL TELESCOPE OF THE PARIS OBSERVATORY.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 261 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year postage included..... $3 20
One copy, six months postage included 1 60

Clubs.—One extra copy of THE SCIENTIFIC AMERICAN will be supplied gratis for every club of five subscribers at $3.20 each; additional copies at same proportionate rate. Postage prepaid.

Remit by postal order. Address

MUNN & CO., 261 Broadway, corner of Warren street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, postage paid, to subscribers. Single copies, 10 cents. Sold by all news dealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year postage free, on receipt of *seven dollars*. Both papers to one address or different addresses as desired.

The safest way to remit is by draft, postal order, or registered letter. Address MUNN & CO., 261 Broadway, corner of Warren street, New York.

Scientific American Export Edition.

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1.) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information: (2.) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, $5.00 a year, sent prepaid to any part of the world. Single copies 50 cents. ☞ Manufacturers and others who desire to secure foreign trade may have large, and handsomely displayed announcements published in this edition at a very moderate cost.

The SCIENTIFIC AMERICAN Export Edition has a large guaranteed circulation in all commercial places throughout the world. Address MUNN & CO., 261 Broadway, corner of Warren street, New York.

NEW YORK, SATURDAY, DECEMBER 15, 1883.

Contents.

(Illustrated articles are marked with an asterisk.)

Affairs at the Patent Office	378	Lhermitte's paper trim. machine*	370
Agricultural inventions	378	Life of stones, the	368
Analysis of luminous rays	372	Lucilia Macellaria	378
Argois	369	Machine for trimming paper*	370
Arlberg tunnel, the	370	Manufacture of bits	375
Belt holder*	376	Massive scaffolding*	374
Business and personal	378	Mechanical inventions	378
Canes, how made	376	Myer's improved harrow*	371
Cholera in Egypt	369	Nickel cooking utensils poison	377
Copper and microbia	373	Northern Pacific seen by an Eng.	374
Cotton centennial of 1884	377	Notes and queries	379
Covering iron and steel with cop	374	Old ammunition	374
Carrier's soap for upper leather	375	Ox gall soap for silks	377
Dentists sharpen their own burs	373	Pattern designing	364
Edison Electric Light Co	368	Peculiar sky appearance in Peru	377
Electric light by Faure accumu	371	People without consumption	371
Emulsion of castor oil	377	Photo prints from tracings	376
Enameled pasteboard	377	Photographing on linen and silk	376
Engineering inventions	376	Photographs, how to glaze	370
Engraved eggs*	374	Printed calico	377
Equatorial of Paris Observa*	367	Proposed textile laboratory	368
Fire escape, Watt's*	371	Purification of sewage	372
Garden improvem't for winter*	373	Refining vegetable fibers	377
Gold separator	376	Reis transmitter, the	373
Good deal of sweetening	375	Salmon eggs, how obtained	374
Giant heron, the	375	Snake mortality in India	374
Gutta-percha stopping	373	Sorghum sugar in Ohio	374
Heroic children	368	Spark arrester, Printup's	370
How fire is carried in cotton	374	Ten-hoop flour barrels	368
How to cook an old hen	373	Tincture of musk	377
How to glaze photographs	370	Trials of pumping engines	371
Illumination of steam boilers	376	Underground cables	372
Index of inventions	379	Use of cinder as ballast	373
Injury by heat	368	Velocities	374
Irrigation works in Italy	391	Wooden spools, how made	369
Japanese bronzes, the	371	West's improved plow*	371

TABLE OF CONTENTS OF

THE SCIENTIFIC AMERICAN SUPPLEMENT

No. 415,

For the Week ending December 15, 1883.

Price 10 cents. For sale by all newsdealers

PAGE

I. CHEMISTRY AND METALLURGY.—Carbon in Steel ... 6618
Heat developed in Forging ... 6619
Recent Studies on the Constitution of Alkaloids.—Extract from a lecture delivered before the Philadelphia College of Pharmacy.—By SAML. P. SADTLER ... 6624

II. ENGINEERING AND MECHANICS.—Apparatus for Extracting Starch from Potatoes.—With engraving ... 6618
A Simple Apparatus for describing Ellipses.—By Prof. E. J. HALLOCK.—1 figure ... 6618
A Novel Propeller Engine.—With full description, and numerous engravings.—By Prof. MACCORD ... 6620
The New Russian Torpedo Boat, the Poti.—With engraving ... 6621
A New Steamer Propelled by Hydraulic Reaction—Figures showing plan and side views of the steamer ... 6621
A New Form of Flexible Band Dynamometer.—By Prof. W. C. UNWIN.—4 figures ... 6622

III. TECHNOLOGY.—Enlarging on Argentic Paper and Opals.—By A. GOODALL ... 6616
The Manufacture and Characteristics of Photographic Lenses ... 6616
Improved Developers for Gelatine Plates.—By DR. EDER ... 6617
The Preparation of Lard for Use in Pharmacy.—By Prof. REDWOOD ... 6617
Anti-Corrosion Paint ... 6617
Manufacture of Charcoal in Kilns.—Different kilns used ... 6619

IV. ART, ARCHITECTURE, AND ARCHÆOLOGY.—The German National Monument.—With two engravings of the statues of Peace and War ... 6615
The Art Aspects of Modern Dress ... 6615
Artisans' Dwellings, Hornsey, London.—With engraving ... 6616
Discovery of Ancient Church in Jerusalem ... 6629

V. ELECTRICITY, HEAT, ETC.—See's Gas Stove.—With engraving ... 6622
Rectification of Alcohol by Electricity.—3 engravings showing Apparatus for Hydrogenizing Impure Spirits, Electrolyzing Apparatus, and Arrangement of the Siemens Machine ... 6625

VI. GEOLOGY.—On the Mineralogical Localities in and around New York City.—By NELSON H. DARTON ... 6629

VII. NATURAL HISTORY.—The Zoological Society's Gardens, London.—With full page engravings showing the new Reptile House, and the Bobiroosa family ... 6628

VIII. HORTICULTURE.—The Kauri Pine—Damarra Australis.—With engraving ... 6630
How to Successfully Transplant Trees ... 6630

IX. MEDICINE, HYGIENE, ETC.—On the Treatment of Congestive Headache.—By Dr. J. L. CORNING ... 6625
The Use of the Mullein Plant in the Treatment of Pulmonary Consumption.—By Dr. J. B. QUINLAN ... 6626
Action of Mineral Waters and of Hot Water upon the Bile ... 6625
Vivisection.—Apparatus Used.—Full page of engravings ... 6626
Insanity from Alcohol.—Intemperance a fruitful as well as inexhaustible source for the increase of insanity.—By Dr. A. BAER, Berlin ... 6627
Plantain as a Styptic.—By J. W. COLCORD ... 6627
Danger from Flies ... 6627

THE EDISON ELECTRIC LIGHT CO.

According to the recent annual report of this company, the First District Works in New York, Pearl Street Station, is now running up to its full capacity. It has 9,811 incandescent lamps now in actual use; and it is connected and has wired for 12,379 lamps. The dynamos of this station were started for the first time on September 4, 1882, and have been running and furnishing light, without stop, night and day, since that time. Considering that this mode of lighting is an absolutely new art or industry, the achievements of the Edison Company are most remarkable, and the mechanical and business management may well be called splendid.

The company has inaugurated an extensive system for the introduction of small or isolated mechanisms for working the lights; under this system large buildings and villages may enjoy the luxury of the electric light. Altogether the Edison Company now have 246 plants at work and 61,366 lamps. Mr. Edison is still engaged in perfecting important electrical improvements; 215 patents have so far been granted to him and about 100 more have been filed. He goes upon the plan of securing by letters patent every possible feature of construction, that is likely to fortify or uphold the interests of his company.

INJURY BY HEAT.

In some mechanical processes the production of heat by friction is a serious injury to the value of the time and the material employed and used. Machines must be cooled to do their work well, and parts which are particularly exposed to friction must be renewed frequently to keep the productive value of the machine intact. If means could be found to kill the heat at the moment of its generation, some mechanical processes would be forwarded and others made more profitable. The hardest steel cannot withstand the disintegrating effects of heat by friction, even when the friction is produced by contact with a much softer metal. In the ordinary rivet machine, where copper rivets are made for belting purposes, the heading hammer is a cylinder of hardened cast steel. It strikes a blow against the end of a bit of soft copper wire, and instantly so much heat is evolved that not only is the rivet too hot to be handled, but the steel hammer is affected to almost as great an extent; at least, the repeated blows of the steel against the soft copper anneal the steel and rapidly destroy its integrity.

In the lathe turning of steel, and in the production of machine screws from the bar or rod, rapid work can be done by means of a constant flow of oil or of water; in some instances so high a speed as eighteen feet per minute has been profitably reached in the turning of steel when a constant stream of water plays upon the point of the turning tool. Still there are cases where in turning the depth of the chip prevents the cooling water from reaching the point of the tool; and in the case of the hammer blow of the rivet machine the application of a constant stream of water or oil would seem to be inconvenient, if not impossible. There appears to be room for improvement and remedy in this department of metal working; possibly chemical contrivance may be successful where mechanical means have failed.

THE LIFE OF STONES.

Some months ago these pages had an article on the "Decay of Building Stones." The subject is worthy more than a passing paper, as it affects not only the permanency of public buildings, but the lasting qualities of the mementos to our own dead. A run through the graveyards of the oldest settled portions of the country proves that some of our more recently formed stones possess an enormous amount of durability; the slates, for instance, outlasting even marble, to say nothing of sandstone. But the oldest stones which have been found, those retaining their inscriptions legibly, are those from such quarries as the Bolton Ledge, in Connecticut, specimens of which may be found in other localities. But the chief value of this stone is that it is a resistant to the acids in the atmosphere, especially those generated in manufacturing localities from combined smoke and steam emitters. This stone appears to be a slate impregnated with mica so closely mixed that it gives the entire surface an almost glassy appearance. It is much in favor for pavements for hospitals, chemical laboratories, and other places where the floor would be exposed to the action of acids and other chemicals. In the early history of the country, especially of New England, these stones, being easily quarried, were largely used for memorial headstones, and the inscriptions, although shallow, are still quite legible. Even when set on edge and exposed for a century or more to the changes of our northern climate, the layers refuse to separate, and even the face wears out sooner than the stone disintegrates.

Slates, of the dark blue color, have withstood the wear of a century and still retain all the sharpness of their inscription. There is something peculiar about this stone. It is simply a clay deposit under water, but it is a great resistant of water and is almost fireproof—much more so than marble or granite.

Sandstones, either of the light shades or the dark red colors, are peculiarly susceptible to elementary or weather influences in this climate. Monuments in cemeteries composed of the Portland red sandstone show marks of weather wear within ten years. Buildings composed of this stone are defaced almost before the elements have given them the seal of age by their mellowing influence. Window stools of churches, steps, balustrades, hoods, and projecting caps peel off in flakes or crack as though under too much weight. This stone is only sharp sea sand agglutinized and cemented by the oxide of iron. It disintegrates too rapidly on exposure to the atmosphere to be fit for enduring structures. So certain is this to those who cut the cheesy-like stone from its natural quarry that their cemeteries, in close vicinage to the quarries, show very few of these stones in their monuments.

Granite, where not exposed to destructive heat, as to great fires, like the memorable ones of Chicago and Boston, is very enduring. Its clean surface will not encourage even the attachment of moss, while sun heat and frost cold seem to have little influence on it. It is almost absolutely proof against chemical attacks from the atmosphere, and as to sustaining crushing force there is nothing in the merely mineral materials that can equal it, Quincy granite and Westerly granite approaching in their resistant qualities crude cast iron.

Marble is a carbonate of lime, and this simple statement is sufficient to show that marble is not an appropriate material to meet our frigid winters and our torrid summers. The public buildings that have recently been constructed of marble show already the signs of decay. If our climate encouraged the cryptogamous growth on mural stones that the air of England, the British Isles, and even of Southern Europe does, our marble edifices might be sure of a life of ten or more generations. But there is no surety of permanency in the marble buildings erected nowadays. The marble is not pure, and the climate is not fitted for even the purest marble. Our granite and bluestone quarries will be forever our best resorts for building and monumental stone.

Heroic Children.

The British Royal Humane Society has just investigated three instances in which children whose ages ranged from 9 to 12 years have gained the usual rewards for heroism. One little fellow, S. G. Pile, aged 9 years, has been awarded the medal for the following act: A child named Wyatt fell off the pier at Oreston, near Plymouth, on Aug. 18, and had drifted out about seven yards in twelve feet of water, when Pile plunged into the rescue with his clothes on, swam out, and reached the child, bringing it into the steps, where they were both assisted out. Another little fellow, W. W. Hayne, aged 12, has been awarded a testimonial for saving a child named Humphreys, aged 4, in the river at Llanberris on Aug. 20. The latter fell off a bridge into the river, near a whirlpool, when Hayne swam out, fully clothed, and brought him ashore. A similar testimonial has also been awarded to a girl, E. S. Deacon, aged 12, for saving A. Finch at Blackpool, near Dartmouth, on Aug. 20. Finch slipped off the rock and became unconscious, when the girl jumped in, fully dressed, and succeeded in holding her charge above water until assistance arrived.

Proposed Textile Laboratory.—A Practical Economist's Views.

There is a project on foot for the establishment of a textile laboratory, under the auspices of the New England Cotton Manufacturers' Association. It was estimated at the last meeting that the expense would amount to $100,000. Liberal subscriptions were then made for the object, and a committee appointed to work up the matter. The plan was presented by Mr. Edward Atkinson, who said he wanted to get at the actual value of the products of the country, and how those values were made, from the field to the warehouse, or to the hands of the consumer. He thought our people needed more *exact* instruction instead of their present generally very vague ideas, and added: "The most startling thing is, that in respect to food at least one-third, and perhaps one-half of the cost, to the poorer classes in the cities, consists in the expense of retail distribution.

"It costs more in this city of Boston to get the food from the mouths of the baker's ovens into the mouths of the people who eat it, than it does to bring the wheat from Iowa, manufacture it, and prepare it for consumption. The people need instruction, and the remedy for the evil mentioned is in the direction of instruction which should be carried in some degree into the public schools. The problem is how to live on small profits, and how to save in cooking food after it is put into the houses. And this textile laboratory lies at the foundation of such instruction."

Ten-Hoop Flour Barrels.

The Milwaukee millers are getting down to some nice points in the economies of their business, as is so generally the practice nowadays in all industries. They have resolved hereafter to use only ten-hoop instead of twelve-hoop barrels. Some of the millers have been using only ten hoops for months, but on December 4 the Millers' Association passed a resolution that all would hereafter use only ten-hoop barrels—after the present supply of barrels was used up—on all their patents and other flour. It is said that in this way they will effect a saving of three cents a barrel, or enough to pay the cartage on the wheat and the subsequent cartage on the flour.

A WRITER of mathematical bent finds from the census returns that there are about 17,000 dentists in the United States, who, he estimates, pack into the teeth of the American people a ton of pure gold annually. Continuing his speculations, he predicts that in the twenty-first century all the gold in the country will be buried in the graveyards.

THE CHOLERA IN EGYPT.

The German Commission which visited Egypt for the purpose of studying the etiology of cholera and for making experiments designed to instruct doctors in its successful medical treatment, have recently made a report through Dr. Koch, dated Alexandria, Sept. 17, 1883. From it we extract some items of interest. The purpose of the commission was first to make preliminary investigations which might afterward be extended and applied. This desire was fully gratified by the kindness of the doctors of the Greek Hospital, who put at the disposal of their visiting brethren their laboratories, all the cholera patients, and also the corpses of those who died with this disease.

The commission established itself upon the first floor of the hospital in two adjacent and well lighted halls. In one microscopic studies were pursued, in the other culture experiments. The animals intended for experiments were placed in both apartments until their numbers had so much increased that it appeared dangerous to work with poisonous matter in the same place occupied by the commission all day, and they were then removed and isolated.

Up to the date of the report the material examined was obtained from 12 cholera patients and 6 corpses. Of the 12 patients 9 were examined in the Greek Hospital, 2 in the German, and 1 in the Arab. The symptoms in all cases were those of true Asiatic cholera. The blood of the patients, the vomits, and feces were all studied. As it was soon seen that the blood did not contain micro-organisms, that the vomits were relatively barren of them, while the feces contained large numbers, these latter have principally afforded material for experiments of infection among the animals.

The numbers of autopsies made is slight, but they yielded important results. The corpses belonged to very different nationalities (3 Nubians, 2 Austrians, 4 Greeks, 1 Turk), and were of various ages (2 infants, 2 old men over 60 years old, the next between 25 and 30 years of age), and finally the durations of their sickness had been unequal. But a great advantage was found in being able to perform the autopsy almost immediately after death or at most a few hours later. Under these conditions it has been possible to exclude with certainty all the changes that putrefaction might effect in the organs, especially in the intestines, which often prevents any microscopic examination of these parts.

In the blood and in the organs which for other contagious diseases are frequently the seat of micro-parasites, viz., the lungs, spleen, the kidneys, the liver, no infectious material was discovered. At times bacteria have been detected in the lungs, but their form and position showed that they had no connection with the malady itself. In the contents of the intestines and in the feces microbes have been encountered in astounding numbers and of very diverse species. None, however, predominated, and moreover nothing showed any relation between these bacteria and the disease.

But an examination of the intestine itself revealed an important fact. With the exception of one patient who died of a different disease, the walls of the intestines of the rest yielded a peculiar species of bacterium. These bacteria were rod-like bodies, and therefore properly *bacilli*, and closely resembled the bacilli of glanders. In the cases where hand examination showed but slight alterations, the bacilli had penetrated the tubular glands of the intestinal mucus and had excited there intense irritation. Frequently the bacilli had effected an entrance behind the epithelial covering of the gland, and had multiplied between the epithelium and the membrane of the gland. In addition they were found in great numbers upon the surface of the intestinal villosities, and had frequently entered into their tissue. In severe cases accompanied by a blood infiltration of the intestinal mucus the bacteria showed themselves in great force, and then they continued their encroachments past the glands, the surrounding tissue, the deeper layers of mucus, until they reached the muscular support of the intestine.

The principal seat of these alterations was found toward the lower part of the slender intestine.

These facts observed upon recently dead subjects were valuable, as there could have been no possible vitiation of these results from decomposition, which produces a very similar bacterial vegetation. The same points had been observed by Dr. Koch in cholera patients from India, but as these were less recent subjects he had felt unwilling to assign the phenomena exclusively to the progress of the disease. The exact coincidence of observations in the Egyptian and Indian subjects proves the identity of the disease and establishes one character of its action. Dr. Koch reports that there can be no doubt as to the existence of some relation between the bacilli and the disease, as they have been found upon all recent cholera victims, but absent upon patients who had succumbed to other maladies. Nevertheless, he adds, the coincidence of the cholera and bacilli in the intestines does not justify our regarding them as the cause, but might as well be interpreted as the consequence of the disease.

To prove the first of these assumptions it is necessary to cultivate the bacilli in great purity, and then to attempt to reproduce the disease by their inoculation in animals. For this it is of the first importance to have animals which exhibit a certain receptivity for the infectious germs, but as yet, despite all efforts, cholera has not been communicated to animals in an incontestable manner.

Experiments have been made again and again upon rabbits, dogs, cats, monkeys, pigs, rats, etc.

The only facts in this connection which merit attention are those instanced by Thiersch, who has seen mice die of diarrhœa who had been inoculated with the intestinal contents of cholera patients. Burdon-Sanderson has confirmed this, others deny it. Mice were experimented with at Alexandria without success; various materials, as vomits, feces, intestinal contents, fresh or kept some time, or dried, have been mingled with their food, but the animals remain as ever in undisturbed health.

They went further; they raised by culture intestinal bacteria, and gave them as food or inoculated them upon animals. Some septic maladies developed in consequence, but no cholera.

Dr. Koch offers a presumptive explanation of this unexpected result. Toward the end of an epidemic the infectious matter has lost its activity or at least has become uncertain in its action. If, then, when the plague is over men are no more susceptible to the infecting germ of cholera we cannot expect to find it different with animals of whose receptivity we at present know nothing. The commission reached Alexandria when the scourge was disappearing, and it seems now important for them to repeat their experiments of inoculation at some point where the cholera is at its height. In Egypt it is stamped out in the principal cities and exists only in the villages of Upper Egypt, where it is impossible to execute an autopsy for fear of the inhabitants.

Dr. Koch, in consideration of the interesting results already gained, earnestly recommends the transference of the labors of the commission from Egypt to India, where, as at Bombay, the plague rages almost unabated.

ARGOLS.

When the hot sun was ripening the grapes on the hillsides of Tuscany, or along the Tagus or Garonne, there was a wonderful amount of chemical action going on in the fruit, a tolerably fair illustration of the way Nature's laboratory is always busy. By and by the grapes were crushed and wines of one grade or another were the result. We are apt to think that since wine "maketh glad the heart of man," its stimulant effect is all that we owe to it. Very true, grape juice fermented exhilarates the spirits, and its influence on the destinies of the human race has been practically without limit longer than any history, even monumental or traditional, can trace, but we cannot look to that now. We are going after something in the wine besides its alcohol (to which it owes its stimulating power), and in order to reach our point we must go back to the grape, and see how it grew and what it did.

All the time that the fruit was growing, even before it began to ripen, the vine, which had drawn up potassa from the soil, was depositing more or less of it in the cells of the grape. It did not leave it there as potassa, for it was making an acid from the carbon, oxygen, and hydrogen which it took in both by roots and by leaves, mostly the latter. This acid we call tartaric, and as the acid and base united the result was tartrate of potassa; and by one of those singular freaks of Nature's chemistry, whose individual causes we have not yet detected and perhaps never shall, the potassa would not be satisfied with one proportion of the acid, but took two and made thus a bitartrate, and in this peculiarity lies its import to us, for that extra supply makes it an *acid tartrate*, and its constitution unstable.

As the grape ripened, sugar was formed, and with that—probably through it—more tartaric acid, the change being caused only by the combination of an additional amount of oxygen together with water. When the grapes were fully ripe, therefore, and were crushed, we had a juice flowing, the future wine, containing a variety of substances, only two of which concern us now—sugar and bitartrate of potassa.

The juice when placed in casks began to ferment. Its sugar was of the glucose type, which has received its name, grape sugar, from this very fruit, though found abundantly in others, but all the sugars—cane or grape—in fermentation do one thing—they split into carbonic acid and alcohol. The acid escapes as a gas, if it is free to do so, but the alcohol remains.

Now the bitartrate of potassa which had been formed during growth is not soluble in alcohol, and consequently whatever alcohol is produced by the fermentation must necessarily separate from the wine just its proportionate amount of the tartrate. This tartrate, from the curious and mysterious laws which regulate crystallization, goes out to the sides of the cask and attaches itself there. It is heavier than the wine, and we might suppose that it would all gradually settle to the bottom, but it does no such thing; and though the deposit is certainly thickest at the bottom, it is only moderately so.

Of course it has taken with it such materials as it found floating, and by so doing it has swept as with a net the grape juice, and a beautifully clear, transparent wine remains. The bitartrate has crystallized as it adhered to the sides and bottom of the cask, and has formed a solid crust of thickness corresponding to the nature of the grapes and the strength of the wine. It is not uncommon to find a firm, strong layer half to three-quarters of an inch thick, and even more. The crystals are of moderate size, sharp, four sided, trimetric. Their transparency depends on the nature of the juice from which they have been formed. Some are brilliant and clear; some have entangled so much of the muddy dregs as to be almost entirely opaque. And their proportion of actual bitartrate of potash varies in the same degree from 95 down to 15 or 20 per cent.

This mass of crystals is what is known in commerce as *argols*. It is sometimes called crude tartar, and when refined and purified is cream tartar. Of course argols can be an article of export only from the countries producing wine in large quantity, and naturally our supply comes mostly from the south of Europe. It is usually reckoned that red wines are richer in argols than the white, but it is the fact that very often the red argols from Oporto are so "muddy" as to be the poorest of all.

As cream tartar is simply argols refined to their highest grade, the question as to which of the two shall be imported becomes in part a matter of tariff regulation. Crude argols are now free of duty, while cream tartar pays heavily. Under this state of things the importation of argols, taking say the year 1877, was 8,999,470 pounds and of cream tartar 2,456,924, while in 1867, when the duty on argols was double that on cream tartar, the former were 2,012,000 pounds and the latter 2,051,168. The custom house value of the importations of 1877 was $1,839,205.

We are beginning to make wine in this country, and every cask of wine produces argols, but the quantity thus far is so small as to be of no moment, and it will in fact be many years before American argols will have any effect on the market.

The greater proportion is sold and used without refining into cream tartar. For the purposes of cookery only the latter can be employed, but this takes only a small part. The chief use is in the processes of the dyer. A.

Pattern Designing.

A writer in our esteemed contemporary, *Cotton, Wool, and Iron*, thinks that our pattern designers for fabrics have not kept pace with loom building. Novelties in fabrics are very rare; we imitate foreign makers too much, and if we accidentally drop on something new in imitating, we then imitate each other. Most of us are satisfied if we do as well as some who have gone before us. There are not enough whose ambition leads them to "look beyond," to reach into untrodden fields. For ten years past the progress in the building of fancy cassimere looms has been wonderful, and the loom maker of to-day can say, with a feeling that he can fill the bill, "If you don't see what you want, ask for it." We do not believe the same feeling holds good with our designer, who has a chance to-day unknown to the designer of years ago. He has a loom on which he can do most anything; he has yarns of silk, worsted, jute, mohair, etc., which he can combine in entirely new fabrics, if he would only "look beyond" and step into untrodden fields. Don't imagine that you must do only just what has been done before, but try something entirely new. If you get a new fabric don't be set back by any commission man, for they are only mortal, and as liable to err as any set of men we ever had to deal with. If you get a new thing, make enough for a garment, and according to what that garment is to be, go to the most fashionable maker and get his opinion. If he objects, and you are satisfied you have a good thing, then go to some leaders of fashion and persuade them to wear the garment. Don't give up. Remember that a new fabric is the same as any new invention, and that a new invention often takes a lifetime to perfect it. Do not get discouraged, but persevere; combine new materials and make a bold stroke for novelty.

We have now plush looms for working up mohair. Some of them weave a single fabric, some of them weave two pieces together face to face, and the plush is cut apart by a knife in various ways according to the make of loom. When this is done there are two pieces of perfect plush that were woven at one time. By a combination of the mechanism of the two looms there is nothing to prevent weaving a mohair plush figure on a woolen ground. This could readily be done in various colors, and beautiful and entirely novel effects could be produced in this way. A plush spot or figure on a woolen ground would look brighter than in a body by itself. Combined goods of this kind would have of necessity to be a melton finish, as the shearing could only be applied to the plush face. As the ground work of the cloth would not be touched by the shear, hard knotted yarn could be thrown in that could not be used under other circumstances, producing effects that would be entirely novel.

How Wooden Spools are Made.

The birch is first sawed into sticks four or five feet long and seven-eighths of an inch to three inches square, according to the size of the spool to be produced. These sticks are thoroughly seasoned. They are sawed into short blocks, and the blocks are dried in a hot air kiln. At the time they are sawed a hole is bored through them. One whirl of the little block against the sharp knives, shaped by a pattern, makes the spool, at the rate of one per second. A small boy feeds the spool machine, simply placing the blocks in a spout and throwing out the knotty or defective stock. The machine is automatic, but cannot do the sorting. The spools are revolved rapidly in drums, and polish themselves. For some purposes they are dyed yellow, red, or black. They are made in thousands of shapes and sizes. When one sees on a spool of thread "100 yards" or "200 yards," these words do not signify that the thread has been measured, but that the spool has been gauged and is supposed to contain so much thread. When a silk or linen or cotton firm wants a spool made, it sends a pattern to the spool maker. This pattern gives the size and shape of the barrel and the head and bevel. These patterns determine the amount of thread that the spool will hold. One Maine factory turns out 100,000 gross of spools per day, and consumes 2,500 cords of birch annually.

MACHINE FOR TRIMMING PAPER ON FOUR SIDES.

This new machine, manufactured by Messrs. Lhermite Bros., of Paris, is designed for shaping registers, copy-books, letter paper, etc., and, in general, all articles of paper that are trimmed in large quantities to a given size. Such sizes being rarely square, and nearly always rectangular, and, moreover, the blade having always to remain invariably in the same place, the problem to be solved was the finding of a combination that should permit each side of the rectangle to come alternately in contact with the blade throughout its whole length, and that, too, accurately and automatically. The following description will show by what means the manufacturers have succeeded in finding a satisfactory solution.

The cast iron frame of this machine supports, at its rear, a trimming apparatus, which consists of a cutter-head that moves between two checks affixed to the frame. This cutter-head, which is guided by two rollers and by slanting slides, is connected with a lever which oscillates upon a fixed point, and which is coupled with a connecting rod that is actuated either by hand or power, through the intermedium of a train of gear wheels.

The movable part of the machine consists of two iron uprights, whose lower portion forms a cup and contains a ball that rolls over a support bolted to the frame. These two uprights are connected at their upper part by a cross brace, and at the middle by an annular plate, in whose center is a pivoting disk that is designed to receive the paper. The upper cross piece forms a nut, and carries at its center a screw provided with a hand wheel. The gauge, which is fixed to the lower extremity of the screw, is capable of being given a rotary motion independent of that of the latter, and is held by a bolt that indicates at the moment the paper is pressed whether the gauge block is exactly parallel with the blade.

The lower cross piece carries a collar that is designed to receive the extremity of the rod of the pivoting disk. Around this latter, and beneath the annular plate, there is an iron circle which is made eccentric with respect to the latter by an amount equal to half the difference between the two sides of the gauge block.

For shifting the paper after each cut, a horizontal lever is used which is quite similar to the reversing bar of a locomotive, and which causes the pivoting disk to revolve. In order that the latter shall not make more than a quarter revolution, a click drops into a notch at the precise moment that it should stop. This click is *lifted* by the lever itself when the latter is pulled back in order to make another quarter revolution. From this arrangement it will be seen that, aside from a rotary motion, the disk that carries the paper, and consequently the entire affair formed of the cross pieces and uprights, has a shifting motion, which is communicated thereto by the lever and eccentric circle.

In front of the machine there are two winches, one of which serves, through the intermedium of beveled gear wheels, to rotate the disk *in situ*, while the other is designed to permit of the approach or recession of the carriage that carries the entire movable part, so as to put one of the faces of the gauge (the eccentricity of the circle having been regulated with regard to the size to be obtained) in contact with the blade. The carriage is afterward fixed to the frame with screws, so as to secure an invariable position for it.

The machine, after it has been regulated, is operated as follows: Two packages of paper are taken and placed back to back (as shown in the figure), and squared up by means of a guide arranged for the purpose. The gauge employed being double the size of one of the packages, it follows that, in *four* cuts, *two* completely trimmed packages are obtained. Moreover, as the disk that carries the paper is so arranged that it can be rendered movable perpendicularly to the blade, and independently of the other motions, it therefore becomes possible, by operating with a gauge quadruple the size that is to be obtained, to cut in two what has been obtained by the first operation, and thus form *four* packages with *five* cuts only. The machine may, when necessary, be employed as an ordinary trimmer, and trim piles of paper as much as one-tenth of a meter in thickness.—*Annales Industrielles.*

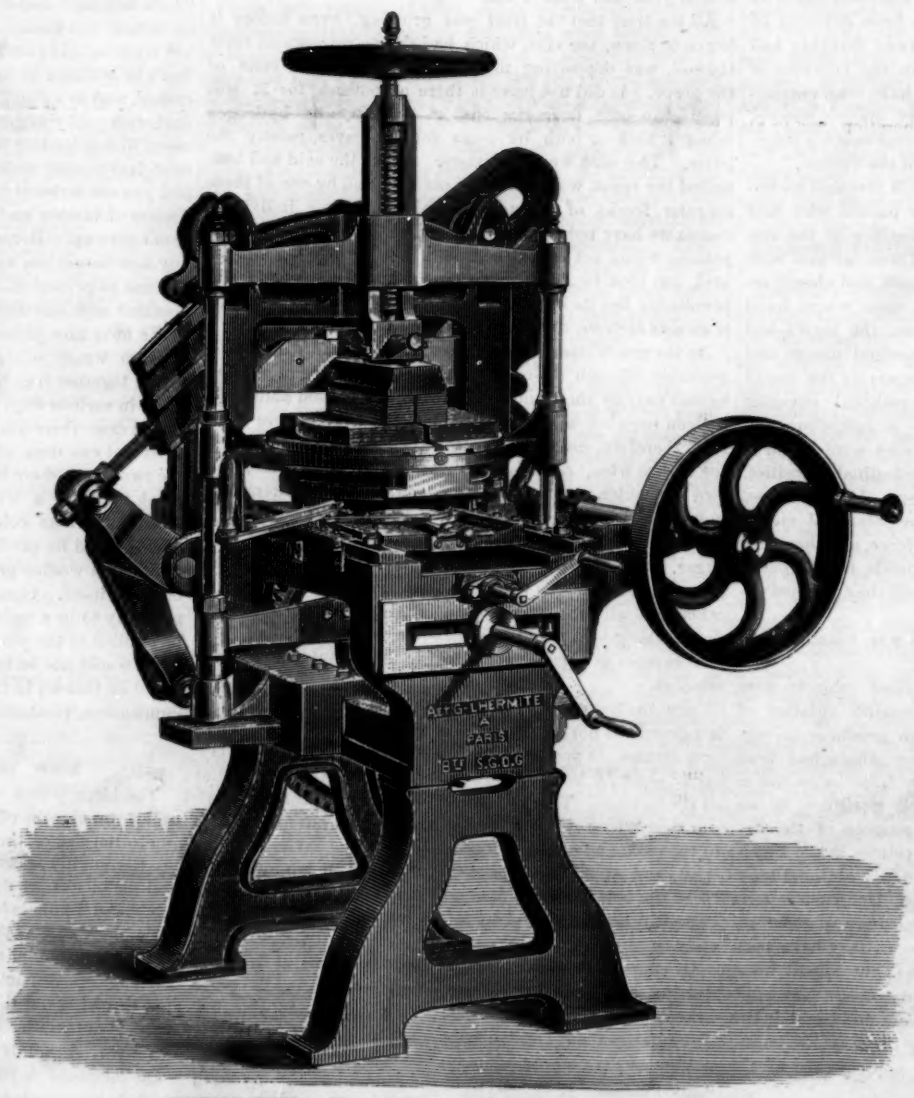

LHERMITE'S MACHINE FOR TRIMMING PAPER.

About a hundred thousand Canadians are engaged in the lumber business. The total product of lumber in Canada in 1881 was $38,541,752.

SPARK ARRESTER.

An invention recently patented by Mr. John C. Printup, of Rome, Ga., is to prevent sparks from escaping from smoke stacks of locomotives and other engines. The smoke stack has a flaring head, to which is hinged a tapering top secured by a spring catch. To the upper edge is fastened a wire gauze, *c*. A circular sheet iron plate, *b*, having a central circular aperture, is riveted to the upper edge of the head of the smoke stack. An inverted sheet iron cone, *a*,

PRINTUP'S SPARK ARRESTER.

is suspended at a little distance below the plate by brackets. The base of the cone is larger than the aperture, and the cone is of such size that the area of the annular space surrounding it is at least equal to the area of the cylindrical part of the stack, so that the draught will not be obstructed. The sparks that pass up the stack strike against the convex surface of the cone, *a*, are deflected against the outer part of the plate, *b*, and shell of the stack, and fall back to the lower part of the stack, from where they can easily be removed.

New Use for Electricity.

The endless diversity of uses to which electricity may be put received another illustration recently at the Court Opera at Vienna, where, by the simple expedient of suspending tiny incandescent lamps by fine swinging wires, the effect was produced of swarms of fireflies flitting about a tropical forest. By switches the current is turned off and on, and the effect, as the artificial fireflies flash and dance in midair, is said to have been electrical in other than a literal sense.

The Arlberg Tunnel.

The piercing of the mountain was successfully completed, as far as the advanced heading is concerned, on Tuesday, the 13th of November, 1883. The tunnel proved to be three meters shorter than had been calculated, and thus the meeting took place a day sooner than was intended. The *Engineer* says a similar miscalculation in the St. Gothard Tunnel was attributed to the attraction of the mountain. Another great Alpine highway is preliminarily opened up, just two years after the first experimental trip conveyed about sixty passengers—contractors, engineers, and their friends—through the tunnel of the St. Gothard. The new tunnel is 10,270 meters in length, while the Mount Cenis Tunnel is 12,323, and the St. Gothard 14,900 meters. The first took fourteen years and a half, and the second about eight to bore; the Arlberg Tunnel will have taken, when vaulted and ready to receive the first locomotive, about four years. Dynamite has been largely used, and the Brandt revolving rock drill has been employed, as well as the Ferroux percussion drill. For these drills several streams from the heights of the snow-covered Arlberg were gathered on the eastern side into reservoirs, from which turbines which compressed the air to five atmospheres, for the Ferroux borers, were worked; while on the western side pumped water was passed through pipes to the pressure of over a hundred atmospheres, to work the Brandt revolving borer, which cuts cylindrical blocks of rock from the mountain.

The gallery has been driven on a level with the bottom of the future tunnel, and not on the Belgian system, as was formerly done, on a level with the top. Large money premiums were granted for completing the work before the stipulated time—in which premiums the contractors allowed their workmen to share. The two halves of the work were allotted on December 21, 1880, to two contractors—Ceconi for the eastern part, and the Brothers Lapp for the western side; but the piercing of the galleries, effected in the beginning by ordinary tools, as the nature of the stone did not allow the employment of boring machines, had already begun in June, 1880. On November 13 and November 17 respectively, the percussion and the rotating borers began their work, which advanced on each side at an average of from 5 to 7 meters daily, the greatest effort having been achieved in 1882, when 3,590 meters were bored, while the St. Gothard Tunnel had a maximum of boring in 1878 of only 2,530 meters. The whole cost, including the double tracked railway through the tunnel, will not exceed eighteen million florins, or one and a half million pounds, including the premium to the contractors for early completion; while the cost of the whole railway line from Innsbruck, in the Tyrol, to Bludenz, in the Austrian province of Vorarlberg, passing through the Arlberg Tunnel, will be forty million florins. The third Alpine tunnel connects parts of the same country, and not foreign countries, as in the case of its forerunners.

How to Glaze Photographs.

By E. Wideman.—Take virgin wax, 8 grammes, and of ordinary ether, 100 grammes; shake, and allow them to dissolve. Over each plate to be waxed (take care they are perfectly clean) pour a little of this liquid, 8 or 10 drops, and polish with a pad of linen until all traces of the wax have disappeared. Next dissolve about 40 grammes of white gelatine in 400 of ordinary water in a hot water oven, and filter through a cloth or fine sieve into a porcelain dish. Coat the waxed surface of the plate with normal collodion, of 1 gramme gun-cotton to 50 of ether and 50 of alcohol. When just set, immerse in the warm gelatine bath, while the mounted photograph is also soaked until thoroughly impregnated with gelatine.

Raise the plate with the finger to let it drain, and allow the gelatine to form a solid body with the collodion, and apply the picture to the surface without taking out of the bath. Press the card against the glass, beginning at the top, and inclining them as they are being taken out; with the other hand cause the rest to adhere by lightly rubbing the card down with a fine sponge.

Afterward wipe off the excess of gelatine from the back of the card and reverse of the plate; leave it to dry in a warm place, and in about eight or nine hours cut round the edges, and if it is dry it will come apart directly.

A little experience will suffice to obtain very pretty results, free from bubbles; the gelatine may be colored at will with aniline dyes soluble in water.—*La Nature.*

Irrigation Works in Italy.

The irrigation system of Italy is probably the most complete in the world, and still it is constantly being increased; it forms a part of the elaborate system of defense against floods necessitated by the conformation of the Northern Provinces. According to the latest official statistics, the irrigation canals of Piedmont alone give 125,550 gallons per second, distributed over 1,340,000 acres; and those of Lombardy 95,355 gallons per second, distributed over 1,680,400 acres. These great works have not been, comparatively speaking, expensive. The Cavour canal, constructed within the last few years, draws its supply from the rivers Po and Dora Baltea. It gives a flow of 29,200 gallons per second, waters nearly 40,000 acres, and cost 1,600,000*l.*, about 32,200*l.* per mile. It was constructed in four years, and measures are now under consideration for increasing its flow by 5,300 gallons per second.

A smaller canal, subsidiary to it, gives 18,540 gallons per second, and cost 24,154*l.* per mile. The largest canals are the Cavour, and its subsidiary canal just mentioned; the Muzza, Agliano, and Naviglio Grande. The smaller of these gives 13,200 gallons per second. Below this point the canals become very numerous, and interspersed all over the country. These canals are not only used for purposes of irrigation, but also to supply motive power, by which again the water is raised to districts lying upon a higher level. On the steep slope of the Dora Baltea, not far from Turin, three canals (the Torea, Agliano, and Rotho) flow parallel to each other, on different levels, while the water is used at the top of the hill, 62 ft. above the highest of them. The arrangement adopted is as follows:

A stream of 158 gallons per second is diverted from the Torea canal, and carried down the hill in a leaden pipe, until it meets the Agliano canal. Here it is pumped up to the summit level by eight pumps, worked by four turbines, driven by a fall of water taken from the Agliano canal, and allowed to flow down into the Rotho. By joining this latter it is used for irrigation, and thus not a drop is wasted. The great principle of Italian engineers is to work on a large scale, thus attaining at the same time efficiency and economy, and avoiding constant alterations and additions; and it is by such means that the extraordinary fertility of Northern Italy is produced and maintained.

A People without Consumption.

A paper was read recently before the Tennessee Medical Society with the title "A People without Consumption, and some Account of their Country." The country in question is the Cumberland plateau. The writer, Dr. Wright, has practiced in the region throughout a generation, and in his assertion of fact touching the entire absence of consumption he is supported by the testimony of about twenty other physicians of standing.—*Medical and Surgical Reporter.*

HARROW.

The harrow represented in the engraving has been recently patented by Mr. William H. Myers, of Oregon, Wisconsin, and is flexible jointed so that it may be adapted for different kinds of work by the different forms in which the teeth may be set. The teeth are held by two series of bars, *a*, placed side by side and arranged transversely to the line of movement, and connected by rods, *c*, that are hinge jointed to the bars by means of plates, *d*, fitted on top of the bars and extending from side to side. The two series of bars are connected by the stretcher sweep, *e*, by means of braced hooks and eyes, which keep them apart, and to which the team is attached. The front bars, to which the sweep is connected, have hook plates, *f*, bolted on top and engaging the rods, *c*, back of the joints to make the joints rigid when the teeth stand upright, as in Figs. 1 and 2, and the other bars have plates, *b*, held by the same bolt that secures the hinge plate. These plates, *b*, are straight to one end and bent upward at the other, and when arranged as in Fig. 1 the teeth will be made to work upright. When the bent end is turned backward the teeth will incline backward, and when turned over so that the bent ends incline downward, the teeth will incline forward and operate like cultivators. With the plates turned lengthwise of the bars and the hook plates, *f*, disconnected, the teeth will lie nearly flat for smoothing and leveling the ground, as shown in Fig. 3. On the rear bars are eye studs, so that when the plates are arranged as in Figs. 1 and 2 the teeth will work upright when drawn as indicated, but will pitch backward if the stretcher be hooked on at the rear end.

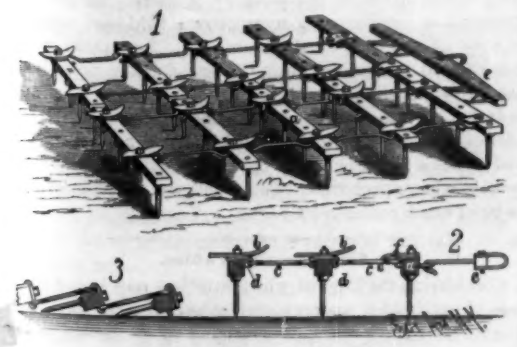

MYERS' IMPROVED HARROW.

FIRE ESCAPE.

The accompanying engraving clearly represents the operation and construction of a fire escape in which the explosive force of gunpowder is used to elevate the ladder from the ground to the roof or windows of a building. A small cannon or mortar fires a suitable projectile, to which one end of an iron chain ladder is attached, to any desired point of the burning building. The projectile is made heavy and is fired with sufficient force to crush through the roof, wall, or floor of a building and thus hold the ladder against the weight of at least six persons. As an additional means of holding the ladder, there is a chain connecting the projectile with the ladder and with a suitable grapnel or anchor, not shown in the engraving, which will always catch upon the roof or window casing. The mortar may be placed upon a wagon, as indicated in the engraving, or swiveled upon a cross piece on a fireman's hose truck. At its side is placed the chain ladder, which is to be elevated by the ball. The ball is attached to the ladder by a short chain, having a swivel formed in it so that any revolution during the flight will not be communicated to the ladder; and attached to the chain near the ball may be the grapnel. In a box placed upon the truck is carried the powder. After the ball has found a firm lodgment in the building, the foot of the ladder is drawn away from the wall and secured in that position by iron rods driven into the ground, as shown in the right of the illustration. As no combustible material enters into the construction of the ladder, flames will have no effect upon it. With this device a ladder may be quickly raised to any part of a building, the inmates of which would thereby be provided with a means of escape.

WATTS' FIRE ESCAPE.

This invention has been patented by Mr. Geo. W. Watts, of 433 Court Street, Brooklyn, N. Y.

Trials of Pumping Engines.

On September 26, Mr. M. Curry, the borough engineer of Dover, made an official trial of a pumping engine erected upon the Corporation Water Works, by Messrs. Simpson & Co., of Grosvenor Road, London. The engine was designed to pump 75,000 gallons of water per hour 150 ft. high, excluding friction, and was guaranteed to consume not more than 2·6 lb. of coal per actual or pump horse power per hour, the actual delivery of the pump being taken and nothing allowed for friction in the main. Nixon's navigation Welsh coal was used, and the results obtained during a trial of 11 hours 45 minutes were 6 per cent in excess of the guarantee. The average indicated horse power, was 78·2, and the coal consumption per horse power, 1·92 lb.; the pump horse power was 61, that is, 78 per cent of the indicated horse power under the unfavorable condition of no allowance being made for the friction in the rising main. The coal consumption per actual horse power measured from the water lifted without allowance for friction in mains, was 2,461 lb.

Messrs. Simpson & Co. are most enterprising in carrying out tests of engine performance, and equally liberal in giving to the profession the results of their experiments, as was evidenced by the capital paper on the subject, presented by Mr. J. G. Mair, one of the partners of the firm, to the Institution of Civil Engineers the year before last. One of the engines supplied by Messrs. Simpson & Co. to the West Middlesex Water Works gave, in a trial during this year, a consumption of 1·53 lb. and 1·821 lb. of coal per indicated and actual horse power respectively, and others at Chelsea, Berlin, Essen, and Lambeth have approached, although they have not quite attained, these figures, while one of their mill engines, supplied to Messrs. Gibbs & Co., of Victoria Docks, more than ten years ago, was found on a year's running to have used only 2 lb. of coal per horse power per hour. These results, it is to be borne in mind, have been attained when working with steam at low pressures, generally under 50 lb. per square inch, while at Dover the pressure was but 40 lb. It is much to be hoped that before long our water works engineers will follow the example set by the mill owners of the Lancashire and Yorkshire districts, where pressures of 80 lb., 90 lb., and 100 lb. are now common. With such pressures at their disposal we have no doubt that Messrs. Simpson could materially improve even upon the admirable results they have already obtained.—*Engineering.*

Asbestos Enamel.

Powdered asbestos is used by M. Erichsen, of Copenhagen, for making an enamel or coating to be applied to pipes, walls, and so on. The powder is mixed with soluble salts, such as silicate of potash, and mineral or other colors which combine with silicic acid, so as to form a product which resists the action of oxygen, heat, cold, or damp. The coating furnishes a refractory glaze, which protects the material it is applied to, whether wood, gas, or water pipes, and stone or brick buildings. When applied to masonry or wood the surface of these is first washed with soap and water. In preparing the enamel the refuse asbestos only need be employed. It is also proposed to apply the coating to boilers in order to protect the plates against a too intense fire.

Electric Lighting and Car Propulsion by the Faure Accumulators.

The Paris correspondent of the London *Telegraph* says that when the Continental Hotel there was recently lighted up for the first time under the Faure system, the stored electrical energy was brought to one of the doors of the hotel in a cart. Communication with the candelabra in the largest room of the first floor was established in a few moments, in the presence of some 300 visitors. Many of those present afterward journeyed to the Arc de Triomphe and back in a tram car propelled by electricity supplied in the self-same accumulators, by way of testing the availability of the power thus stored.

PLOW.

The ordinary cast iron plow point of either new or worn out plows is covered with an attachment that can be applied by a blacksmith of ordinary skill, and which increases its strength and durability. This is partly accomplished by a steel covering plate cut and bent to form the share and colter, which may be of any desired shape. This is shown detached in the cut, and in place on the plow. The share is made to project over the right-hand wing of the point in order to give a good, lasting, steel cutting edge, that may be sharpened when needed. The whole may be made from a plate mainly of triangular shape, except the forward end, which lies under the detachable cap point, the left-hand portion of the plate being bent up to form the colter.

The plate thus formed is secured to the plow point by the same bolt that holds the cast point to the plow, the plate having a counter sunk hole for the reception of the bolt head. Having been thus secured, the cap point (Fig. 2) is fitted over the lip end of the plate and forward end of the point. This cap is made of steel plate cut into suitable shape and bent around and welded to form a sheath to the forward end of the point, and having a piece of steel (shown in the section Fig. 2), welded in it at its front end, sufficiently large to permit of the cap being sharpened occasionally. The solid point of the cap is hardened. It is fitted over the plow point by heating it and driving it on.

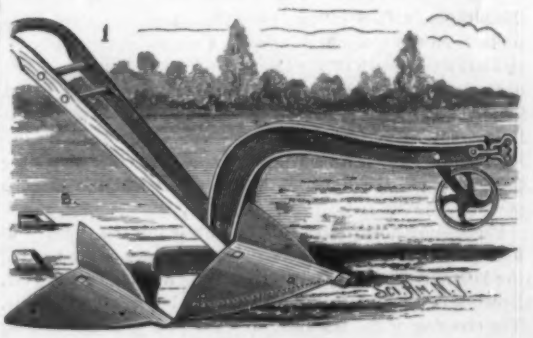

WEST'S IMPROVED PLOW.

This invention has been patented by Mr. Adam C. West, of Blanchard, Mich., and further information may be obtained from Mr. Charles V. West, of same place.

THE EQUATORIAL OF THE PARIS OBSERVATORY.

(*Continued from first page.*)

it possible for the observer to quickly move the instrument into any position by revolving the winch placed at his right. The toothed arc, L, revolves upon the horary axis and slides upon the bronze limb of a circle which is likewise fixed to the axis. A lever, M, renders the arc immovable at will, so that the latter need not be freed from the tangential screw when it is desired to free the instrument itself. The weight that actuates the wheelwork is wound up on a rod by means of a winch that may be removed at will. The back motion in right ascension is given by a button, and the tangential screw is disengaged with a key by acting upon a button. The clockwork movement is capable of being stopped when in motion, and *vice versa*. The steel sleeve, R, which is adjusted by slight friction on the cast iron tube of the telescope, is provided with two toothed circles. With the first of these gears the pinion, Y, which transmits motion to the divided circle placed near the ocular. With the second gears another pinion, which causes the revolution of the sleeve, through the winch placed within reach of the observer. The sleeve is carried and held at its base by three double rollers, R', fixed to the telescope tube. The counterpoise, O, is fixed to jointed levers, E, which pivot upon studs, O', and act upon the four rollers upon which the sleeve rests. At the upper part of the latter is fixed the mounting of the mirror, S, of 40 centimeters. This mirror is adjusted in a cast iron cylinder, in which it rests upon a layer of flannel. The bottom of the cylinder, which contains apertures 40 millimeters square, is movable, and gives a means also of regulating the pressure. The cylinder is held in its mounting by two trunnions, and is regulated by an adjusting screw. The mirror is inclosed in a square metallic box having in each end an opening that is closed by hinged covers. Upon the sides of this box are placed two comet seekers, T. The objective is fixed to the tube of the telescope, and the small mirror, V, which is placed in the square box, rests also on a layer of flannel in a cast iron cylinder carried by an adjustable mounting. A gas lamp, Q, serves for lighting up the interior of the telescope, and makes the black threads show upon a brilliant field, and the bright threads upon a dark background. The threads are accurately brought into the focus of the objective by revolving the small sleeve to the right or left.
—*La Nature.*

SIMPLE GARDEN IMPROVEMENT FOR PROMOTING WINTER GROWTH.

The accompanying engraving so well shows the idea of the sort of half-hothouse proposed that it cannot fail to be at once understood. The winters over a large portion of the United States have so few extremely cold days and nights that, with a cheap and simple protector like this, many plants and shrubs might live through the year, when they would not otherwise do so. It will be seen from the illustration that the frame which holds the glass is designed to be attached to a wall or high fence on one side, and may be put up in sections small and light enough to be easily moved from one place to another. A similar device, or one on the same principle, might, we should think, be useful in the way of encouraging the laying of fowls during the winter months.

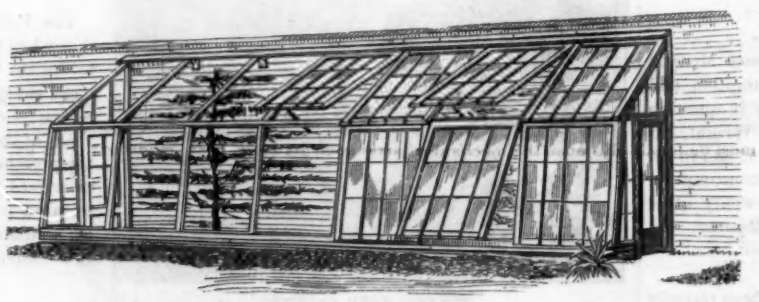

FRAME FOR PROTECTING TREES IN WINTER.

The Northern Pacific as seen by an Englishman.

At a recent meeting of the Institution of Civil Engineers, Mr. G. B. Bruce, Vice-President, gave an account of his recent visit to the United States of America as the representative of the Institution, on the occasion of the opening of the through line of the Northern Pacific Railroad.

The railroad is based upon a concession from the government, the company making the road, and the government giving 25,000 acres of land per mile of road constructed, in alternate sections, the government holding one block and the company the next. The railroad lies mainly between the 46th and 47th parallels of north latitude, about 200 miles south from the boundary between Canada and the States, and 300 miles south of the Canadian Pacific Railway. The distance between the termini, Lake Superior and Puget Sound, was about 2,200 miles. Besides this, there was a branch from Brainerd on the main line to St. Paul on the Mississippi, which would probably be the chief route for traffic between the Northern Pacific towns and the Eastern ports.

Proceeding northwestward from St. Paul, the country at first was chiefly under wheat; some distance after passing the Missouri it was mainly devoted to raising cattle. Mr. Bruce was particularly struck with the bridges on the line. The crossing of the Missouri at Bismarck was effected by an iron bridge 1,450 feet long, having three spans of 400 feet each and two spans of 113 feet each, and was 50 feet above the highest level of summer floods. The large girders were 50 feet deep. The majority of the bridges throughout the road were of timber, the most remarkable being among the Rocky Mountains. Here, too, were the steepest gradients on the line, the maximum being 116 feet to the mile. The crossing of the summits of the two ranges would be by two tunnels, each 1,200 yards long; at present temporary roads had been laid over the mountains. Mr. Bruce considered the passage of the Columbia River through the Cascade Range the most imposing feature of the line.

The road at this point, for a considerable distance, is carried along a ledge made by blasting away the almost perpendicular hillside into the river below. The rails were of steel, 56 pounds to the yard; the road was well sleepered and reasonably ballasted; and there were all the elements of a good and substantial road, which in time will rank doubtless among the best in the United States. There was no signaling apparatus, but great use was made of the telegraph. In one feature the American engineers seemed to be particularly distinguished—namely, in the arrangement of their work, and in the strictly systematic manner in which they carried it forward under very difficult and trying circumstances. The visitors were conducted in four trains of about ten Pullman carriages each. They all left New York, and were ready to start from Chicago on the 1st of September.

They met with a hearty reception at the cities of St. Paul and Minneapolis, which, though not forty years old, each contain a population of between 80,000 and 90,000, and are the centers of large industries. Notwithstanding the lack of timber over many hundreds of miles in the center, the discovery of coal in that very locality would make it easy to supply the engines with fuel. The Westinghouse brake seemed to be in general use in America. The whole trip was carried out with very few mishaps; one or two slight accidents were the outcome of the running together of carriages from different lines, the couplings of which did not correspond. The great ceremony of the occasion was driving the last spike at the "Garrison" Station, at the foot of the eastern side of the Rocky Mountains, when about half a mile of track was laid in about half an hour.

Mr. Bruce then alluded briefly to some things not connected with the Northern Pacific Railroad. He was struck with the much greater use made of the electric light in America than in England. In many little cities in the prairies, a high pole in the middle of the town with a light on it illuminated the whole place. He very much admired the steamboat accommodation in the United States, and remarked that the arrangements for landing in Liverpool, in a steam tug without even a covering to keep off the rain, contrasted most unfavorably therewith, and were a disgrace to England and to the companies which perpetuated them. While at Chicago, Mr. Bruce went to see the new works of the Pullman Car Company. There was now there a town of 7,000 inhabitants, where three years ago there was nothing but an unoccupied stretch of country. The chief feature was in the surroundings of the works; everything had been done for the welfare and comfort of the workmen, and the whole had been a great financial as well as moral success.

Gutta-Percha Stopping.*

CHAS. E. FRANCIS, D.D.S., NEW YORK.

Among the various preparations for filling carious teeth, gutta-percha stopping holds an exceedingly important place.

Cases are commonly presented where defective teeth can be better preserved if filled with this material than with any other substance. Owing to its nice adaptability to the dentinal walls, together with its slightly expansive nature, it can be made to seal cavities in which it is packed, with a remarkable degree of thoroughness.

For bucco-cervical cavities of second and third molars, it will stand for years, and prove exceedingly effective in preventing renewed decay.

It is frequently and advantageously used for packing against cervical walls of large buccal or approximal cavities, prior to introducing fillings of oxyphosphate of zinc or amalgam; also for repairing large gold fillings with cervical borders slightly undermined.

As a stopping for deciduous teeth, it can be quickly introduced, and in most cases answers admirably; also for impoverished or poorly calcified teeth when attacked by caries, and is peculiarly well adapted in cases of white decay or where the tooth structure is undergoing rapid decalcification.

As a temporary stopping for early decay in permanent teeth, nothing can surpass or perhaps equal it for safety. It holds good until the dentine becomes more dense, and the patient older and better able to tolerate the introduction of compact gold fillings.

In cases where the dental pulp is nearly or quite exposed, protection should be afforded by a covering of oxyphosphate of zinc to prevent pulpitis, which might be occasioned by the expansion and consequent pressure of gutta-percha stoppings. Similar care should also be observed where the enamel walls are so exceedingly frail as to become easily fractured.

Although these stoppings are liable to wear away when much exposed to attrition, the surrounding cavity walls usually remain well preserved. They are, moreover, easily repaired or renewed, and with no loss to the tooth structure.

For large stoppings, much exposed to wear, caps of gold plate can be fitted to cover them accurately, on the cavity surface of which may be soldered small loops or "T" shaped anchors. Such a cap, warmed over a spirit lamp, can be embedded in or united with the fillings, leaving a firm gold surface on which to masticate.

With a degree of tact and experience, gutta-percha stoppings can be manipulated readily and with comparatively little trouble. Cavities should be prepared as nicely as possible, and kept dry while filling is introduced.

Small pellets of the stopping heated to a plastic condition can be carried to the cavity on the point of a small curved and flattened instrument. Gentle pressure against the walls packs it securely. The excess can be trimmed away with flat heated instruments, and the surface rubbed with burnishers. A bit of cotton or spunk moistened with chloroform, held with tweezers and passed over the filling, will also aid in smoothing it.

Great care is requisite to avoid over-heating the material. If warmed over a spirit lamp it must be held considerably above the flame. It is safer to place bits of the stopping on a piece of heated porcelain or a small covered vessel of boiling water, preparatory to use.

Gutta-percha stoppings, if well impacted in properly prepared cavities, seldom prove treacherous, but as a rule are exceedingly safe and reliable.

* Frequent inquiries concerning the practical value of this material and the method of manipulating it, the writer states to be his excuse for printing the following communication, which we copy from the *Independent Practitioner*.

Analysis of Luminous Rays.

A means of isolating the heat rays from any luminous source, intercepting the illuminating and chemical rays, has been communicated to the Academie des Sciences by M. Van Assche. Upon a piece of glass he lets fall a drop of melted and sublimated selenium, which is immediately covered by a thin glass; and the melted material is then squeezed gently until it is extended into a very thin, homogeneous sheet. The glass is then placed under pressure and gradually cooled. It is necessary that the selenium should not boil on the glass, or otherwise cells are formed by means of the vapor, which interfere with the action of the material. When properly made the cell is of uniform thickness, and is free from bubbles and striations. Cells so constructed, when placed in the path of a ray of light, reflect the chemical rays, and convert the luminous ones into electrical energy. Only the calorific rays pass through the cell; being at the same time subjected to a definite refraction. The transmitted light is monochromatic, of a ruby-vermilion tint, only showing one luminous band in the spectroscope. If the light of burning sodium is passed through this form of cell, there is annihilation of luminosity. The author contends that an arrangement of this kind will form a considerable addition to the apparatus used for analyzing light and determining the constituents of flames.

Purification of Sewage.

Experimental trials of the Andrews-Parker process for deodorizing and purifying the sewage of London have been in operation since last May. The 90,000,000 of gallons daily and nightly flows into subterranean reservoirs located beyond Beckton. By the action of water and repeated pumping before the last station is reached all the fecal matter in the sewage is reduced to a liquid having a grayish-black appearance and an extremely offensive odor. The sewage, after having been drawn into a tank, is subjected to a powerful stream of water, under heavy pressure, charged with ground clay, caustic soda, hydrochloric acid, and sulphate of iron. The mixture is then turned into large tanks, where it is allowed to remain until the action of the precipitates has thrown all the sediment to the bottom, when the liquid is drawn off into the Thames, it being a pure, colorless, and odorless water. The sediment is kiln dried and pulverized, and makes a fertilizer which chemical analysis has shown to contain a large proportion of ammonia and phosphates, and to be of much commercial value.

Underground Cables.

Considering the interest which attaches now to the question of overhead *v.* underground cables, it may be useful to give the figures of the underground cables in existence at the end of 1881. They were as follows:

Countries.	Length in kilometers of cables.	of wires.
1 in Germany	5,500	37,605
2 in Austro-Hungary	29½	511
3 in Belgium	11	232
4 in Denmark	3	79
5 in France (including colonies)	851	11,880
6 in Great Britain and Ireland	771	17,700
7 in The Netherlands	96	591
8 in Roumania	11	56
9 in Russia	202	250
10 in Switzerland	45	327
	7,519½	69,231

Correspondence.

Lucilia Macellaria.

To the Editor of the Scientific American:

The article by Dr. Fred. Humbert in your issue of Nov. 10 has just met my eye. Dr. Humbert speaks of several inaccuracies that are important enough to need correction in his letter published in the *Bulletin* of the United States National Museum, which may be true enough; but in attaching any blame to the undersigned for whatever inaccuracies there may be in his letter, he is himself both inaccurate and unjust.

The truth of the matter is that the doctor's letter was so illegible, and his English so poor, that some alterations were needed to make sense of it; but those alterations were made for the most part before the letter was transmitted to me by Prof. Baird. A re-examination of the original letter shows that none of the changes which Dr. Humbert indicates were made, but that on the points which he draws attention to, his letter corresponds with the published copy. In reference to the specific name of the fly, I wish to assure Dr. Humbert that I did not depend on his description for the determination, but upon the specimens themselves, which, fortunately, he transmitted with the communication. There are characters which enable the entomologist to make such a determination whether the flies are dead or alive, and therefore his conclusion that the fly cannot be properly named is totally unwarranted.

C. V. RILEY.

Washington, D. C., December 4, 1883.

"How to Cook an Old Hen."

To the Editor of the Scientific American:

In your issue of November 24 Professor Williams gives his method of cooking an old hen, which reminds me of a little of my own experience with that familiar bird. Having the hen fever bad, I was glad to get in proper season every sitting hen I could. At one time I got a fearful measly looking specimen, but as she was willing to sit on anything, even brick-bats, she served my purpose well. During the process of incubation she sat very close and almost entirely abstained from food. When the three weeks were up there was hardly enough of body left to generate heat sufficient to finish incubation. But when she came out with her chicks she never declined her rations, and became very fat when the chickens were ready to wean; and as she was good for nothing else I took her head off, and not being the proprietor of a "boarding house," she was cooked for my own table, and to my surprise she was the most delicious fowl I ever tasted. And it seems to me this is a proper question to place before any scientific American—Whether she was an old hen or not? And whether a fowl can be old that makes all its growth, except the frame, in a few weeks?

Let that be as it may, the discovery made by me proved fatal to old hens afterward. The proper method is to feed well while they are with the chickens, and kill them as soon as the chickens are ready to wean.

JOS. M. WADE.

Boston, December 3, 1883.

The Use of Cinder as Ballast.

R. M. P. says: We are using on our road a considerable amount of cinder and coal slack for ballast; the question has come up as to whether this ballast is destructive to ties or not.

[ANS.—Engineers who have used cinders as ballast state that they have noticed no injurious effect upon the ties. In a well drained track ties laid in cinder are no more likely to rot than when laid in some other materials. The dust from fine cinders makes the latter objectionable. When the coal has not been completely burned, there is danger from fire.]

The Reis Transmitter.

The world has an interest in knowing what relation Philipp Reis, of Germany, has to the speaking telephone of to-day; what he did is of great importance to us, says a writer, signing himself W. X., in the New York *Electrician*, because if he invented an electric speaking telephone twenty years ago, and made the invention known not only by descriptions of the device, but by making and selling his telephones in public market, it is clear that the credit for the invention belongs by right to him, and it is also plain that so much as he invented belongs now to the world, and ought not to be the exclusive property of any man or company of men.

On this question, as to what Reis did, there has been a vast deal of talk in courts, and a great deal of craftiness by lawyers has been displayed, and the language has been so carefully shaped for the requirements, that if the language were like a machine it would no longer be fitted for ethical purposes. Let us see, then, what it was that Reis *did*.

First. *He invented a certain device, which he called the telephone.* It consisted of two parts, a transmitter and a receiver. Some of his constructions are in existence to-day just as he used them and left them. Let us examine the structure of his transmitters. He made eight or ten varieties, but they all involved the same idea. For the purpose, we will take the bored block form, such as he exhibited to the Physical Society at Frankfort on the Main, 1861.

Now here is a device, a collocation of mechanical details invented and constructed for a specific purpose; namely, the variation of an electric current by means of sound vibrations, chiefly those of the voice, as the tube plainly shows. Is it adapted to its purpose, and will it do the work for which it was designed? This is a question which may be answered in two ways, theoretically and experimentally. If the above instrument, or a facsimile of it, be connected properly with a magneto receiver, its capabilities may be experimentally tested, and when thus tested it is found to be a good speech transmitter, extremely sensitive as a microphone, and words spoken ten feet from it may be plainly heard at the receiver. If that be true, it follows that the Reis transmitter, just as he left it, is capable through its appropriate action of giving to the electric current its proper variations for the reproduction of speech; in other words, it yields the genuine undulatory current. What is true of this transmitter is true of the more common form of Reis transmitter; namely, the cubical box with the membrane on the top. Especially good will the results be, if the transmitter be coupled in the primary circuit of a small induction coil, while the receiver is in the secondary circuit.

Reis invented these transmitters for this purpose, and he used them for the same purposes, and he said he heard words at the receiver which were spoken at his transmitter, and what he said was corroborated by quite a number of his contemporaries, several of whom are now living; but as an offset to the above it has been affirmed, and the courts have so ruled, that Reis *intended* that his transmitter should work in such a way as to make it impossible that speech could be transmitted by it; namely, he *intended* that the electric circuit should be broken for every vibration, and the evidence for it is his description of the working of his device. This declaration is equivalent to the assertion that what Reis invented was, not certain instruments for a certain purpose, but *a theory of the working of certain pieces of apparatus;* and consequently, if Reis did not describe the working of his devices correctly, he did not invent the devices, and consequently the world has no right to his apparatus.

Again, let us inquire what it was that Reis invented. Suppose that in place of the platinum terminals he had used iron, or copper, or carbon, or anything else, would it have changed the character of the device? Not at all. One might have answered better than another for the purpose, but all would act in substantially the same way, the differences would be altogether those of degree and nothing else. Let a piece of electric arc light carbon be substituted for the platinum in either of the forms of Reis' transmitters, and at once it becomes equal to the very best of modern transmitters. Why? Because the *intention* has been changed? No. Because the mechanical arrangements have been modified? No. Indeed, it is only because of the demand for a superior article of carbon for electric lighting that such carbon for transmitters has been adopted, as any one may verify for himself by trying any ten year old carbon stick in his transmitter. Has the one who substitutes the carbon for the platinum invented the *undulatory current?* It is preposterous. At best he has made the transmitter more useful; but, even in that place, the function of the carbon is simply to vary resistance, and it had been put to that service years before.

Second. *Reis described his apparatus and gave his theory of its action.* This is the part that is seized upon by the assailants of the claims of Reis as being the inventor of the speaking telephone. Suppose, for argument sake, it be admitted that Reis expected to reproduce speech by means of an intermittent current, and that he *intended* that his transmitter should make and break circuit for every vibration. It must be admitted that any automatically working device can only work in accordance with the mechanical conditions present in the device, and no will, or intention, or theory concerning it will make any difference in its working, so long as it is not otherwise *compelled* to work differently, in which case it would not be automatic. What then does it matter how Reis thought his machine acted? His *theory* of its working might have been wholly wrong, yet its performance be wholly right. When *we* speak to a Reis transmitter we find it gives the proper undulatory current for the transmission of speech. *It must have done so for Reis,* unless physical laws have changed since his time, and it is not likely that any one will have the hardihood to affirm that; and it is only by trifling with the facts, and by ingeniously framing sentences, that conclusions hostile to Reis' claims have been drawn. How then does the case stand? Reis did two things. He invented a telephone transmitter for the purpose of the electric transmission of speech sounds and any other. He succeeded in doing it, and we can to-day with the same instruments. He also *described* his devices, giving a theory of their action, which in some particulars is inexact. These two things he *did.* The courts have decided that, because he did not *describe* the action of his device as we would describe it to-day, when used for the same purpose it was invented for, the Bell Company is, therefore, entitled to a monopoly of what he *invented* for the purposes for which he invented it.

Copper and Microbia.

It is stated that the antiseptic action of copper sulphate is slightly superior to that of salicylic and benzoic acids; twice greater than that of phenol; five times greater than that of alum, tannin, and arsenious acid; and ten times greater than that of chloral hydrate and the ferrous salts. Copper chloride is from one-third to one-half more efficient than the sulphate.

Affairs at the Patent Office.

WASHINGTON, December 2, 1883.

The new change of time to accommodate the railroads, for that is really all this change was made for, and the consequent bringing to public notice the fact that some railroads had adopted the twenty-four hour system of reckoning time, seems to have had an influence upon inventive genius, for applications are pouring into the Patent Office for devices for clocks and watches with dials upon which the extended hours are noted. Many of these are quite ingenious, but the majority are not actually new, but are simply modifications of a system which was in vogue some four hundred years ago. An inspection of some French publications of the fifteenth century discloses the fact that the manner of duplicating and marking the time from 1 to 24, representing the twenty-four hours of the day, was practiced at that date. A notable instance was shown me in a work of that period containing a plate of a watch with the hours from 1 to 12 in Roman characters upon the outer rim of the dial, while upon an inner circle were the hours from 13 to 24 in Arabic figures. This dial belonged to a watch in Prince Pierre Soltykoff's collection, and was of gold and enamel of most elaborate workmanship, the sides being of rock crystal, through which the works could be seen. The age of the watch is not absolutely ascertained, but from certain characteristics of the movement it is believed to date from the beginning of the reign of Henry II. of France (A.D. 1547).

The Examiner of Interferences has the past week made decisions in several cases which have been for a long time in litigation before the office, and the results of which have been anticipated with considerable interest. In the case of Jablochkoff *vs.* Brush, secondary battery as applied to electric light, Brush showed by evidence that the device which Jablochkoff claimed as his invention, and in which the interference was brought, had been in public use for over two years, and the examiner dissolved the interference. This is one of the first cases under the recent decision of the Supreme Court of the District, as to the taking of testimony to establish the public use of a patent.

In the case of Crompton, Fitzgerald, Biggs, and Beaumont *vs.* Brush, also secondary battery, a decision has been given in favor of Brush. The plaintiffs relied on a foreign patent, but that patent was ruled out.

In the cases of Kieth, Shaw, and Brush *vs.* Faure, and Kieth, Shaw, Maloney, Brush *vs.* Faure, an application to extend the time for taking testimony has been refused. These cases have now been hanging for over a year, and a near settlement seems probable.

Two interesting telephone cases are now under consideration by the Examiner of Interferences, and will probably be shortly decided. These are Eldred *vs.* Shaw and Forium *vs.* Shaw. The point involved is the telephone as applied to the exchange system.

Another examiner has resigned to go into practice against the Office. As has been frequently said, the rates of compensation for the skilled labor acquired only by experience in the Patent Office are so disproportionate to the importance of the services, that it seems that young men of brains and ambition simply use their positions in the Office to acquire a complete familiarity with the rulings and practice, and then resign to utilize that knowledge for their own benefit and that of their clients. While the ranks of patent attorneys are thus recruited the business of the government is really crippled, for new men are constantly being educated only to go out as their predecessors when they shall have become sufficiently well informed to show the Office its weakness, and to win for their clients that which ought to come without the aid of an attorney.

FRANKLIN.

Dentists should sharpen their own Burs.

Dr. G. Newkirk, in the *Dental Cosmos*, recommends dentists who can spare the time to sharpen their own burs. He says that burs may easily be sharpened several times without recutting, if one has the disposition to acquire the art. First, get a knife-edge Arkansas stone. (I had the ill or good fortune to break mine in two, and I keep one piece for this special work.) To *keep* the knife-edge, renew it when dull by holding it lightly on a small, fine corundum wheel, either lathe or engine. Of course this grinding must be done carefully, to avoid chipping the edge. A whetstone may be used to finish the edge if you wish. Take a pine stick, punch a hole in the end with an awl or other small instrument; then whittle down to a nice round handle to hold your bur. Now, holding the handle between the thumb and three fingers of the left hand, let the instrument itself rest on the index finger. With a little practice the right hand may be taught to hold the stone lightly and draw it evenly through the slots and bearing on each chisel edge. As each becomes sharp, a very slight rotation of the handle from left to right brings the next chisel into position, and those sharpened are so passed along and no danger of being dulled, as there might be if the bur were rotated backward. Clean the edge occasionally and have a bit of oiled flannel with which to keep it lubricated. The beginner will probably spoil the edge of his stone once or oftener, but if he perseveres he will soon be gratified by the consciousness of having mastered a nice little art.

LOUISIANA has 2,557 factories, working 30,071 hands, with a capital invested of $18,313,974, paying annually in wages, $4,593,470, and yielding annually in products $34,161,905.

Old Ammunition.

The huge pyramids of spherical shot and shells deposited in various parts of the Royal Arsenal, Woolwich, are condemned to the melting furnaces for conversion into projectiles more adapted to modern requirements. One heap alone contains about 40,000 of the 13-inch shells which were supplied at the time of the Crimean war, and were the most formidable missiles used in the siege of Sebastopol. The 13 inch mortars, from which they were fired, have long ago disappeared out of use, but lie in hundreds in a distant part of the arsenal waiting orders for their demolition, and no round shot or shell of any size have been made since the introduction of rifled ordnance and elongated projectiles. They are being all gradually broken up. Another ancient description of shell of the class known as smoke balls and ground light balls has been declared obsolete, and all that are remaining in store will be destroyed. They are of various sizes, varying from 4½ inches to 13 inches in diameter.

Covering Iron and Steel with Copper.

According to the *Metallarbeiter*, iron can be coppered by dipping it into melted copper, the surface of which is protected by a melted layer of cryolite and phosphoric acid. The articles to be coppered must be heated to the same temperature as the melted copper.

Another process consists in dipping the articles into a melted mixture of one part of chloride or fluoride of copper, and five or six parts of cryolite, and a little chloride of barium. If the article when immersed is connected with the negative pole of a battery, it hastens the process.

A third method consists in dipping the article in a solution of oxalate of copper and bicarbonate of soda, dissolved in ten or fifteen parts of water, acidified with some organic acid.

A MASSIVE SCAFFOLDING.

The Manhattan Company's Bank and the Merchants' National Bank are now erecting a building at Nos. 40 and 42 Wall Street, this city, after designs by W. Wheeler Smith. The building extends through to Pine Street. It will have a front of plain and polished granites from the Hallowell, Fox Island, and Westerly quarries: the floors will be iron beams resting upon iron columns.

In order not to interfere with street traffic and at the same time to expedite the handling of heavy pieces, and be free from the annoyance caused by curious sightseers, a scaffolding of massive strength was erected, shown in the accompanying engraving. The posts composing this framework are 12 by 12 inch pine timbers held together by lateral braces, and between each panel are wooden diagonals. The outer line of posts is set alongside the curbstone. Transversely on top are placed floor beams, 12 by 14 inches, and 6 feet between centers, which project a short distance beyond the curb line, and on these, parallel with the street line, is a flooring of planks 3 inches thick, above which is a second system of planks the same thickness, but laid obliquely.

Raised above the sidewalk is a passageway extending the whole length of the staging. This has a width of 4 feet 6 inches, and is reached by a flight of steps at each end. By this means the foot travel of the street is not interfered with.

The center of the scaffolding is wide and high enough to admit a wagon, which is driven in and unloaded upon the first floor of the building.

The rear post of the main derrick rests just outside the front wall, and consists of two timbers 10 by 12 inches, bolted at intervals to each other and to the main posts. These are placed in a line perpendicular to the street. About 12 feet above the floor is the horizontal arm of the derrick, consisting of two timbers 10 inches square, and placed a few inches apart. The diagonal from the top of the rear post extends over an A frame, and is joined to the end of the horizontal arm. Upon the upper inner corners of the timbers forming this arm are angle irons, constituting the track upon which a little car travels. From the under side of the car hangs a block and tackle. The car is run to the outer end of the track, under which the wagon has been driven, and the hook is attached to the piece to be raised. The hoisting rope extends to the engine in the interior of the building. When the piece has been elevated above the floor, the car is run back and the piece is lowered on to a hand truck, or rollers, by the aid of which it is moved about on the floor. Distributed about parts of the building are derricks that raise the stone and leave it in its final resting place.

The various parts entering into the construction of the scaffolding are held together by nuts and bolts, plates being placed under the heads and nuts. It was designed so as to have sufficient strength to support upon the flooring all the material immediately to be used, thereby relieving the street of all unsightly heaps. Another consideration is that people are not subjected to danger from falling pieces while passing the building.

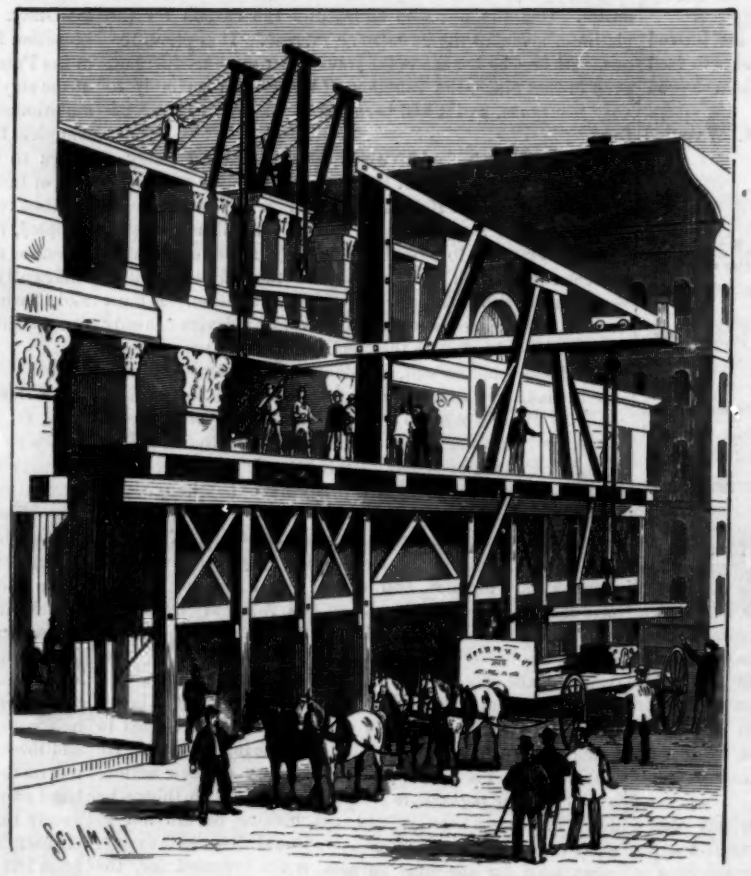

A MASSIVE SCAFFOLDING.

ENGRAVED EGGS.

Some time ago there was a man who stood upon the street corners and in the public squares selling egg shells upon which were engraved names, devices, or flowers. The art of engraving upon eggs is connected with a curious and little known historical fact.

In the month of August, 1808, at the time of the Spanish war, there was found in the patriarchal church of Lisbon an egg upon the shell of which was announced the approaching extermination of the French. This fact caused a lively fermentation in the minds of the superstitious Portuguese population, and came near causing an uprising.

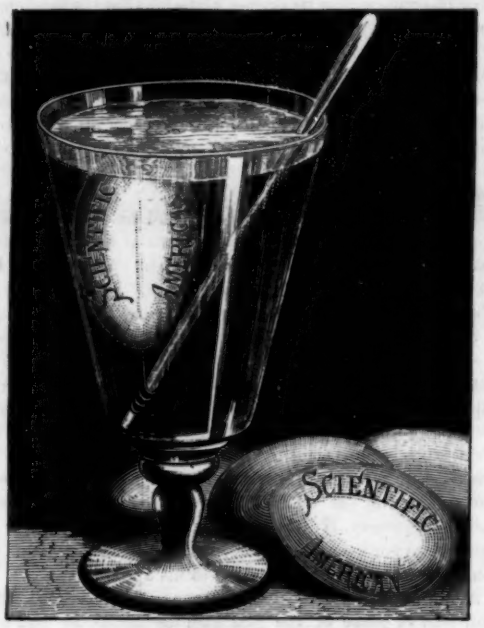

ENGRAVED EGGS.

The French commander remedied the matter very ingeniously by distributing throughout the city thousands of eggs that bore engraved upon them a contradiction of the prediction The Portuguese, deeply astonished, did not know what to think of it, but thousands of eggs giving the lie to a prediction engraved upon one only, had the power of the majority. In addition, a few days afterward, posters put up on all the street corners pointed out the manner in which the miracle was performed. The mode of doing it is very simple.

It consists in writing upon the egg shell with wax or varnish or simply with tallow, and then immersing the egg in some weak acid, such, for example, as vinegar, dilute hydrochloric acid, or etching liquor. Everywhere where the varnish or wax has not protected the shell, the lime of the latter is decomposed and dissolved in the acid, and the writing or drawing remains in relief. Although the *modus operandi* presents no difficulty, a few precautions must be taken in order to be successful on a first experiment.

In the first place, as the eggs that are to be engraved are usually previously blown, so that they may be preserved without alteration, it is necessary before immersing them in the acid to plug up the apertures in the extremities with a bit of beeswax; and, moreover, as the eggs are very light, they must be held at the bottom of the vessel full of acid by means of a thread fixed to a weight or wound round the extremity of a glass rod.

If the acid is very dilute, the operation, though it takes a little longer, gives better results. Two or three minutes usually suffice to give characters that have sufficient relief. —*La Nature.*

Velocities.

An interesting table of velocities has been drawn up by Mr. James Jackson, the librarian of the Paris Geographical Society. He begins, says the *Photo. News*, with the velocity of a man walking two miles and a half an hour, and after alluding to the respective velocities of an ordinary wind, of a race horse, of an express train, of a carrier pigeon, of a hurricane, of sound in air and water, he brings us at last to the velocity of heavenly bodies, of electricity, and, finally, of light. But Mr. Jackson has left out one important velocity, which has only been recently computed, and which is of singular interest, since it represents the only earthly agent known to man with a velocity quicker than sound in water, although naturally less quick than electricity and light; we mean the detonation of the photographer's old friend, gun cotton. Abel and Noble have computed that a train of gun cotton, fired with a fulminate fuse, will transmit the detonating action at a speed of from 17,000 to 19,000 feet per second. In other words, detonation travels at the rate of 200 miles a minute, while next in order comes electricity traveling through a submarine wire at a speed of some 12,000,000 feet per second.

How Fire is Carried in Cotton.

Edward Atkinson, of Boston, says: "Fire lurks in a cotton bale for weeks. The cotton which was injured somewhat over a year ago in Biddeford, Me., was moved to South Boston for sale. The fire broke out again more than once while it was at South Boston being made ready for sale. It was then sold at auction. The fire broke out again in one parcel while it was on the cars being carried away, and in another parcel after it had been received at a factory where it was to be used. The latest outbreak was, I think, thirty days after the original fire."

Sorghum Sugar in Ohio.

A correspondent of the *Ohio Farmer*, conducting a sugar factory in that State, says:

"Not a single man that brought cane to our mill raised as much as one whole acre of it, generally from one-eighth to one-quarter of an acre, and they would have from one load to three or four good wagon loads of the cane; but over four-fifths of them simply wanted molasses for cooking purposes. And but a small portion of it were they willing should be cooked into sugar. Because we did not make more sugar was because we were not allowed to do so. Every gallon of good molasses made from matured cane, agreeable to the Stewart process, will granulate fully four pounds of sugar the first granulation. Estimates give 106 gallons per acre of sorghum molasses as the yield for Ohio. If this be true it would make fully four hundred pounds of dry sugar and seventy gallons of drainage molasses, worth from 35 to 45 cents per gallon at wholesale for cooking purposes. We have sold every particle of our drainage molasses at 35 cents per gallon, and if the sugar is left in we sell it from 69 to 75 cents per gallon. No man can get as much money from an acre of land in corn as he can from sugar cane, if he lives close by a sugar factory. The average worth per acre, if made into molasses alone, under the Stewart process, would be over sixty dollars per acre; and if made into both sugar and molasses it would come to fully seventy dollars per acre; besides this, the crop of cane seed if properly saved, cured, and thrashed, the same as wheat, is worth half as much for feeding purposes as the average acre of corn will yield in the same vicinity." And in any place and upon any circumstances whereby you are able to raise a reasonably good crop of corn, sugar cane will do equally well in the same field. It is more work to cultivate it, because you should plant more hills to the acre; but you can hoe a hill of one just as easy as you can the other, and the cutting is just the same. If you save the cane leaves for fodder it makes more work, but the fodder fully pays for that. The cane seed can be thrashed as easy and exactly the same as wheat, and will yield over fifteen bushels per acre on all cane that is good enough to make 106 gallons of molasses to the acre. The Rio Grande Sugar Company raised and worked up in 1882 about 800 acres of cane—not quite that amount as given into the State of New Jersey for the bounty money. They produced over 330,000 pounds of sugar and twice that number of pounds of drainage molasses. It is a well known fact in that vicinity that it was a very profitable business.

Manufacture of Bits.

In the United States there are fourteen bit factories, eleven being in Connecticut. A *Sun* correspondent recently described the various operations necessary in the manufacture as carried on at Chester. Along the ceiling of the forging room extend lines of heavy shafting filled with driving pulleys from 6 inches to as many feet in diameter. The floor is of clay, packed as hard and smooth as cement, and on it are thrown heaps of red hot bits. Long bars of cold steel are placed between shears which cut them as easily as a lady cuts thread with a pair of scissors. The steel bars are placed in forges which heat them to a white heat, when they are put under trip hammers, striking hundreds of blows per minute, that flatten the bars on one end, round the center, and square the other end. The bit has now started into existence, and is called a "plate."

"It is next passed to the crimpers, who again heat it to whiteness and run it through machines which twist the flat end into a 'pod,' or spiral of beautiful regularity. The 'swedgers' seize it now, and again under the influence of the blowpipe the steel is soon red hot, when one blow from a powerful drop fashions the square end into a shank properly beveled for the bit brace; again it is heated and passed under another drop, which stamps on its shank a figure telling the size of the hole it will bore when finished. Once more it endures the fiery ordeal, and, glowing red, passes through the heading presses, which with a hug and a squeeze crush two inches of the twisted end into a mass in which you faintly discern the point spurs and cutting edges of the future bit. It is next carried into the annealing room, where, with thousands of others, it is buried beneath heaps of charcoal and thoroughly baked until the steel is well softened or annealed. Next it is pickled for several hours in vats containing a strong solution of sulphuric acid, which eats off all the scale left by the many previous heatings in the forges.

"The bit now passes into the machine room, where the rasping machine cuts out all superfluous stock in the head, forming rude cutting edges. The milling machine cuts the point smoothly to the correct bevel, ready for the screw to be made upon it. The leveling machine smooths the bottom of the blades, the facing back machine cuts the edges of the blades straight, the screw cutting machine forms the threads on the point, and the sizing machine cuts the boring end to the exact diameter required. And still the bit is only about half made.

"You pass into another department, and here you see long rows of skilled mechanics seated upon high stools, each man having in front of him a heap of bits and a lot of files of various sizes and forms, known as 'square' 'round,' 'flat,' 'half round,' 'humpback,' 'ground-off,' and 'feather-edge,' and each of these is used in turn to form and smooth the various parts and cutting surfaces of the bit. The squeaking of a hundred files of almost as many sizes and shapes fills the air with shrill notes and sets your teeth on edge.

"You pause for a moment to watch a couple of men who, seated in front of tiny forges, are heating the bits to a cherry red color and then dipping them into dishes of oil and water. You learn that they are tempering them to the proper degree of hardness for cutting. You also learn that, although they can control the temper of the steel, they cannot control their own—when they burn their fingers.

"You now open a door lettered "Polishing Room," and start back at the scene which meets your gaze. A living reproduction of Dante's dream is before you. Men with faces blackened by charcoal dust and emery stand in long rows, while a sheet of fire five or six feet long plays from the hands of each, lighting up their blackened features and making them look like veritable demons. Each man holds in his hand a bit and presses it upon the polishing wheel, which makes many thousand revolutions in a minute, causing by its friction a great sheet of sparks to fly out in front of the operator. You behold the many different processes of finishing as the bits pass on from one workman to another down the row, until at last they look as bright as burnished silver.

"In the packing room many men are sharpening the finished bits, and a few inspectors are examining them with magnifying glasses to see if they can detect any scratches that have been left by the polishers. Here also the bits are sorted into first class and second quality, stamped with the manufacturer's name and trade mark, wrapped in strips of paper, and packed in pasteboard boxes. You are astonished at the variety of sizes and forms, running from small bits hardly an inch long, up to car bits, more than two feet in length, and from the little bit cutting a hole but three-sixteenths of an inch in diameter to the great six-inch auger, which requires two strong men to turn it. You are struck, too, by the oddly shaped machine bits and the curious mortising bit which bores a square hole."

THE GIANT HERON.

The giant heron (Ardea Goliath gigantodes and nobilis) is found in the central and southern part of Africa. The feathers of the upper part of the head and the tuft upon the top of the head, also the feathers on the curve of the wings and the under part of the body with the exception of the white throat, are chestnut brown. The remaining upper part of the body is ash gray. The loose hanging feathers on the fore part of the neck are white on the outside, and black inside. The eye is yellow, the upper part of the bill is black, the under part is greenish yellow at the point, and violet color at the root. The foot is black. The length of this heron is about one hundred and thirty-six centimeters, the breadth one hundred and eighty-six: the length of the tail twenty-one centimeters, and the length of the wings fifty-five.

This bird is found near shallow water. It visits small ponds in the fields, water ditches, and pools, and in winter seeks shallow bays of the sea and waters about the coast, especially where there is a forest in the vicinity, or at least high trees, where it is accustomed to rest.

These giant herons are more timid than any other of the species. Every clap of thunder terrifies them, and they are afraid of men even when seen at a distance. It is a very difficult matter to surprise an old heron, for it seems conscious of every danger, and immediately takes to flight if frigbtened. They have a shrill voice.

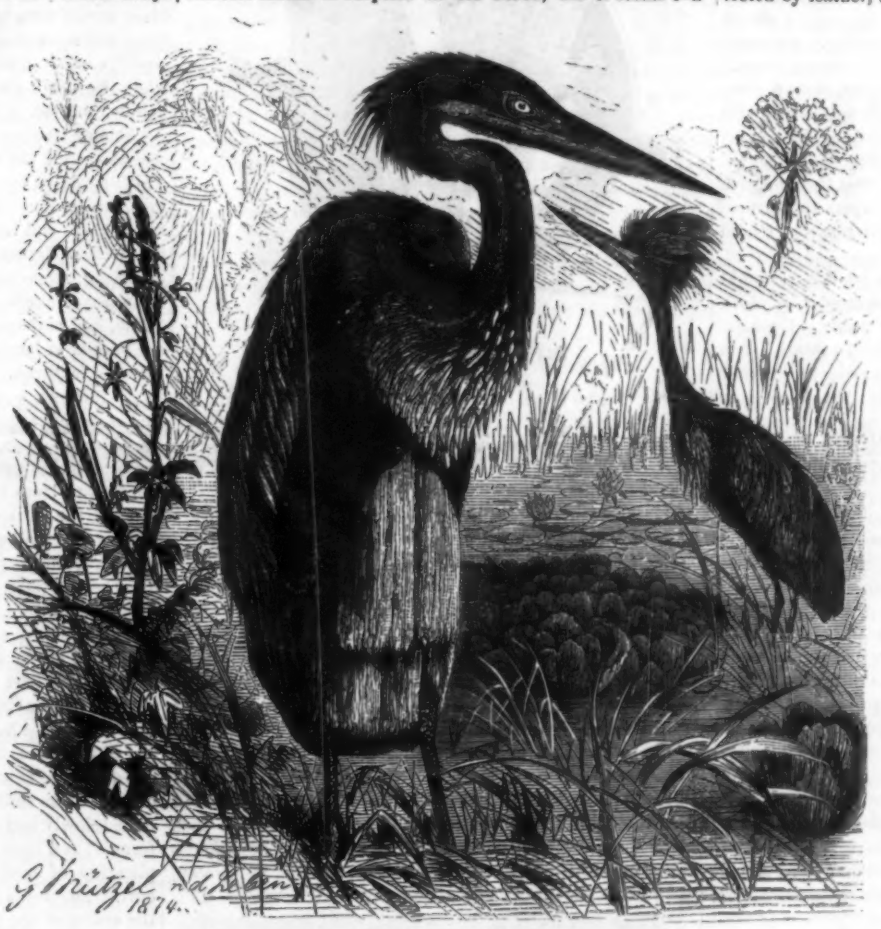

GIANT HERON.—(*One-fifth Natural Size.*)

Their food consists of fishes, frogs, serpents, especially adders, young swamp and water birds, mice, insects that live in the water, and earth worms. Naumann says that when a heron reaches the pond, if it does not suspect the presence of an observer, it generally goes immediately into the shallow water and begins to fish. Bending its neck, and lowering its bill, it fastens a keen look upon the water, and moves softly and with measured strides, but with such cautious steps that not the least splashing sound is heard. It circles round the whole pond in this way, seeking for food, throwing its neck quickly forward, then suddenly drawing it back, holding a fish firmly in its bill. If the fish aimed at is in deep water, it moves with its whole neck under the water, and in order to preserve its balance opens its wings a little. It seldom misses its aim.

These herons form settlements, the nests sometimes numbering a hundred. In April the old herons make their appearance at the nests, repair them if necessary, and then begin to lay. They are about a meter broad, shallow, and simply put together of sticks, twigs, reeds, or straw. They are lined in a very slovenly manner with hair, wool, or feathers. They lay three or four eggs, which average sixty millimeters in length and forty-three thick. The shells are smooth, the color is green. After three weeks of brooding the young birds are hatched. They are helpless, awkward, ugly creatures. They seem to be constantly hungry and eat an incredible amount. They remain in the nest about four weeks. After leaving the nest the parents care for them for a few days, and then leave them to their fate. Old and young then disperse, and the settlement is deserted.

Baldamus says that the fear which these herons have of all birds of prey, even crows and magpies, is really laughable. The robbers appear to know this, for they plunder the heron settlements with shameless impudence, and expect no greater revenge than a few feeble blows of the wings.

They are easily raised in captivity, their food consisting of fish, frogs, and mice.—*From Brehm's Animal Life.*

Snake Mortality in India.

The great mortality in India resulting from snake bites is the direct issue of carelessness on the part of the natives. The snakes abound, the country and climate being particularly favorable, and the foreign residents being their only enemies, the Hindoos not only refraining from killing them but failing to take any precautions to ward off attacks. The native wears little or no clothing; his house is built on a level with the ground, the greater part of the front being formed of hanging mats; his chattels are generally kept in the darkest part of the hut. The snake, being compelled or from inclination desiring to change his quarters, enters the domicile and coils up in the gloomiest part. The first visit of the owner disturbs and angers him, and his resentment is proved by the presence of two little punctures on some part of the dead body of his victim.

The houses of Europeans are raised above the ground, every opening, even the drain pipes, carefully guarded against the ingress of snakes; above all, the houses are well lighted. The Europeans are well clothed and their feet protected by leather, so that the attempt of the reptile to strike is seldom successful. As a consequence we find that of the 22,125 persons killed in India last year by snakes and animals, 19,519 were killed by snakes. The government paid rewards amounting to 141,053 rupees, and 322,421 snakes were destroyed.

How Salmon Eggs are Obtained.

The work of stripping begins during the latter part of October and is continued until all the fish have been operated upon. The Portland (Me.) correspondent of the Boston *Journal* says that the fish when wanted are taken from the water in a dip net, and their condition readily ascertained by gently pressing the abdomen just back of the pectoral fin. If the ova are ripe they will be felt like so many peas beneath the skin, and a slight pressure will cause them to be deposited in a pan placed for that purpose. If the ova are not ripe, or the fish is not disposed to yield them, she is returned to the water a few days longer. After the ova have been deposited the milt is obtained from the male in the same manner, and immediately after falling upon the ova it diffuses itself among them, causing them to at once individualize and grow harder, till within two hours they will be as hard as unripe peas and perfectly globular in form. At once after this fertilizing process the ova are washed several times in cold water, and then set away in cold water for a couple of hours, that all impurities may be removed. The number of eggs obtained from each fish varies from 2,000 to 20,000, the latter number having been obtained this season from a 44-inch salmon, estimated to be a dozen or more years old, and about as old as any are ever obtained for spawning purposes, as the ages of such fish are estimated to be from four to fourteen years. At the expiration of the two hours mentioned above the ova are prepared for the hatching troughs by being placed upon wire screens with meshes about an eighth of an inch square. These screens are inclosed in frames a foot square, and thick enough to allow a half inch of water to flow beneath each one, to assist which an eighth of an inch is removed from the bottom of each of the four sides for three-fourths of their length. Ten of these hatching frames are then placed above each other in a skeleton frame to form a "nest," and the whole then deposited in the hatching troughs of a depth and width just sufficient to contain a row of these nests, after which the water is turned on and a steady flow maintained through the trough till the latter part of January, when the ova will have developed as much as it is safe to allow before distribution among the several States, under whose care they are finally hatched and disposed of as desired.

A Good Deal of Sweetening.

At the recent opening of a new commercial exchange in New York, the president stated that the annual value of the raw sugar imported and produced in the United States considerably exceeded our importations of tea and coffee, with silk, hides, hemp, and rubber added. The figures for sugar were stated at $130,000,000.

Photo-Prints from Tracings.

The most important of all photographic tracing methods is the cyanotype of Pellet, a process depending upon the reduction of an organic ferric salt to the condition of a ferrous salt by the action of light; and so far it is analogous to the platinotype. Ferric compounds react with ferrocyanide of potassium to form Prussian blue, while ferrous compounds form a white salt with the same reagent. If the prepared paper of Pellet were introduced into the ferrocyanide developer without exposure, it would become blue all over, in consequence of the uniform deposition of Prussian blue; but should any part have been sufficiently exposed to the light, the paper will remain white, owing to the complete reduction of the ferric salt to the condition of the ferrous salt. It will be thus obvious that the Pellet process will therefore reproduce a positive as a positive, and a negative as a negative, this circumstance giving it an especial value for copying tracings or drawings by direct contact printing.

The paper for the Pellet method is supplied commercially by the patentees of the process; but it is convenient for those who wish to practice it experimentally to be able to prepare their own; and the following directions will be found amply sufficient:

A solution is made of

Common salt	3 parts.
Perchloride of iron	8 "
Tartaric acid	4 "

in 100 parts of water, and this mixture is thickened by stirring in 25 parts of powdered gum arabic. The paper should be a well-sized and rolled paper, that known as cream laid note paper being the most suitable. It is easy to obtain this paper in the original sheets from a wholesale stationer.

The sheet to be coated must be laid on a drawing board, and it is desirable to fasten it down by means of two pins, after which the mixture is applied as evenly as possible with a broad camel's hair brush. This operation should be performed in a subdued light, and it is desirable to dry the paper as quickly as practicable, in order that the sensitive coating may remain as much as possible upon the surface of the paper. When quite dry, the paper may be stored away for future use.

The tracings from which copies are to be taken should consist of well defined opaque lines upon a ground of clean tracing paper or tracing cloth, and many prefer to use India ink into which a little gamboge has been rubbed. It is unnecessary for us to say anything with respect to the kind of printing frames suitable for the process; but it may be mentioned that large frames on swing stands are required in establishments where the cyanotype process is carried on commercially, as the drawings to be copied are often as much as four feet long.

In sunlight an exposure of one or two minutes is generally sufficient, and in dull weather it may be necessary to give as long an exposure as one hour. Electric light is often used for work of this character, the time of exposure varying, according to the intensity of the light, from twenty minutes to half an hour. To develop, the print is transferred *direct from the copying frame* to a saturated solution of ferrocyanide of potassium, but it is not immersed in this, being merely floated upon its face downward. In order to prevent the developing solution reaching the back of the paper, it is usual to fold back the edges so that the paper forms a kind of dish, and this dish floats boat fashion upon the developer. In ordinary cases, the development is complete in less than a minute; and as soon as the paper is once thoroughly wetted on the face, it may be lifted off the bath, as the solution adhering to the face will complete the development. A blue coloration of the ground indicates an insufficient exposure, while weakness of the lines indicates over-exposure.

The development being complete, the print is floated, face downward, upon clean water, and in about two minutes it is plunged into an acid bath containing 8 parts of hydrochloric acid and 3 parts of sulphuric acid, with 100 parts of water. From six to eight minutes is sufficient time to allow for the removal of redundant iron compounds by the acid, and all that is now required is to thoroughly wash the print with water and to dry it. Any blue spots may be readily removed from the finished print by means of a dilute solution of caustic potash, applied with a camel's hair brush; 1 part of potash dissolved in 28 parts of water answers the purpose admirably.

When cyanotype prints are to be used in the workshop as a guide to working engineers, it is an excellent plan to saturate them with white hard varnish, as this prevents the penetration of oil and the adhesion of dirt.—*Photo. News.*

Currier's Soap for Brown Upper Leather.

A good soap for currier's use on upper leather, says the *Gerberzeitung*, can be made as follows:

In twenty pounds of soft water dissolve two pounds of white curd soap, half a pound of pure beef tallow, half a pound of light resin, two pounds of glycerine, and half a pint of light train oil or vaseline. The soap is cut in small strips to make it dissolve quickly, and put in half of the water and set over a gentle fire. As soon as the soap is dissolved add the tallow, and when it all begins to boil put in the resin. The latter is added slowly with constant stirring. After boiling rapidly for a while the mass is put into a stone crock and the glycerine stirred in, after this the train oil or vaseline, and finally the remainder of the water.

This soap is applied lukewarm, slightly dried, and then polished with glass.

BELT HOLDER.

The belt holder herewith illustrated consists of a series of rollers revolving on iron axle bolts whose ends are supported in a strong frame. The rollers form a curved line identical with the face of the pulley on the line shaft, beside which the holder is placed, so that the belt can be thrown, either by hand or by some of the ordinary shifting devices, from the pulley on to the holder and back again at will. By means of braces it is supported parallel with and close to the pulley, but does not touch either the shaft or pulley. It is firmly secured to the braces, by bolts passing through both the sides and the interior stays. The lowest roller is placed inside the pulley circle, so that when the belt is on the holder it is strained less than when on the pulley. It can be used in any position, care being taken to so place it beside the pulley that the highest roller shall be at the point on the pulley where the belt first touches it when running up on it, and the other rollers shall be level with the face of the pulley. Since the belt is stationary while on the holder, it is

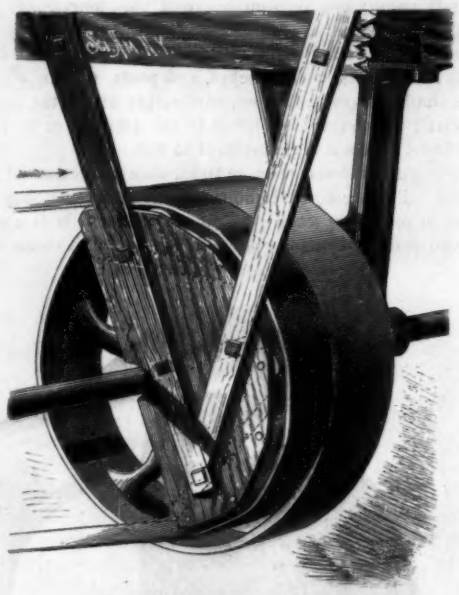

IMPROVED BELT HOLDER.

subjected to no strain or wear; the pulleys and boxes are relieved, there being no strain upon the shaft and its bearings; the belt is in a convenient position for lacing; the work of throwing off and on is simplified, as the belt is in nearly the same position as when at work.

These holders are now being manufactured by Messrs. W. R. Santley & Co., of Wellington, Ohio.

GOLD SEPARATOR.

The invention recently patented by Messrs. H. C. Walker and William Bacon, of Silver Cliff, Colorado, is intended to be applied to a sluiceway through which water and sand pass, and consists in a series of troughs set in the bottom of the sluiceway alternately with similar troughs suspended from the top. The troughs are made of silver-plated sheet copper, the strips of metal being bent lengthwise into a U-shape, one edge being higher than the other, as shown in the engraving. These troughs are set in grooves formed transversely in the bottom of the sluice, parallel with each other and a proper distance apart, so as to be at right angles to the current. The top of the sluice box is, preferably,

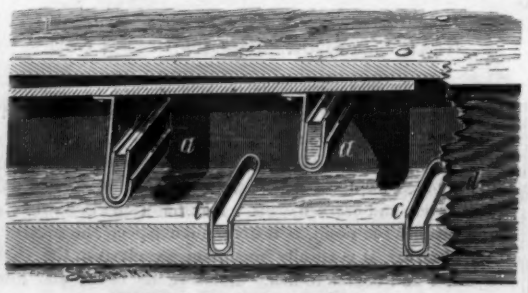

IMPROVED GOLD SEPARATOR.

made double, with a hinged under portion that conforms itself to the volume of water passing through. To the top are secured hangers which are bent upward at their lower ends to receive the troughs. By this arrangement the current of sand and water passing through the box, which may be the ordinary sluiceway for the tailings in mining operations, is forced to come alternately in contact with the upper and lower troughs and the fine metal is brought intimately in contact with the mercury in the troughs. A portion of the side or bottom of the sluice is made removable in order that the troughs may be removed from time to time and filled with fresh mercury. In the absence of water, dry sand can be forced through the box.

Lupinosis.

C. Arnold has extracted from lupins a shining brown solid matter, of a pleasant aromatic odor and taste. In water it dissolves slowly, forming a turbid solution. In doses of ten grammes it produces the usual symptoms of lupinosis, especially acute jaundice.

How Canes are Made.

Comparatively few understand how and where the material is gathered, or the process of its manufacture into canes and umbrella handles. The Chicago *Times* furnishes some information on these points. According to that paper, many of the canes are of imported woods, some from the tropics, China, and the East Indies. The celebrated Whongee canes are from China, where they are well known and celebrated for the regularity of their joints, which are the points from which the leaves are given off, and the stems of a species of phyllosiachys, a gigantic grass, closely allied to the bamboo. The orange and lemon are highly prized and are imported chiefly from the West Indies, and perfect specimens command enormous prices. The orange stick is known by its beautiful green bark, with fine white longitudinal markings, and the lemon by the symmetry of its proportions and both prominence and regularity of its knots.

Myrtle sticks possess also a value, since their appearance is so peculiar that their owner would seldom fail to recognize them. They are imported from Algeria. The rajah stick is an importation. It is the stem of a palm, and a species of calamus. It is grown in Borneo, and takes its name from the fact that the rajah will not allow any to go out of the country unless a heavy duty is paid. These canes, known as palm canes, are distinguished by an angular and more or less flat appearance. Their color is brownish, spotted, and they are quite straight, with neither knob nor curl. They are the petioles of leaf stalks of the date palm. Perhaps the most celebrated of the foreign canes are the Malacca, being the stems of the Calamus sceptonum, a slender climbing palm, and not growing about Malacca, as the name would seem to indicate, but imported from Stak, on the opposite coast of Sumatra. Other foreign canes are of ebony, rosewood, partridge, or hairwood, and cactus, which, when the pith is cut out, present a most novel appearance—hollow, and full of holes.

The manufacture of canes is by no means the simple process of cutting the sticks in the woods, peeling off the bark, whittling down the knots, and sand papering the rough surface, and adding a touch of varnish, a curiously carved handle or head, and tipping the end with a ferrule. In the sand flats of New Jersey whole families support themselves by gathering nanneberry sticks, which they gather in the swamps, straighten with an old vise, steam over an old kettle, and perhaps scrape down or whittle into size. These are packed in large bundles to New York city, and sold to the cane factories. Many imported sticks, however, have to go through a process of straightening by mechanical means, which are a mystery to the uninitiated. They are buried in hot sand until they become pliable. In front of the heap of hot sand in which the sticks are plunged is a stout board from five to six feet long, fixed at an angle inclined to the workman, and having two or more notches cut in the edge. When the stick has become perfectly pliable, the workman places it on one of the notches, and, bending it in the opposite direction to which it is naturally bent, straightens it.

Thus sticks, apparently crooked, bent, warped, and worthless, are by this simple process straightened; but the most curious part of the work is observed in the formation of the crook or curl for the handles which are not naturally supplied with a hook or knob. The workman places one end of the cane firmly in a vise, and pours a continuous stream of fire from a gas pipe on the part which is to be bent. When sufficient heat has been applied, the cane is pulled slowly and gradually round till the hook is completely formed, and then secured with a string. An additional application of heat serves to bake and permanently fix the curl. The under part of the handle is frequently charred by the action of the gas, and is then rubbed down with sand paper until the requisite degree of smoothness is attained.

Photographing on Linen and Silk.

A Detroit photographer says: "There is this feature about photographing on linen: You can *wash and boil* the work and it won't come out. There is some special interest shown among society people just now on this subject, because of some napkins used at the banquet given to Henry Irving, the actor, before he left London. His photograph was on each one, and of course it was intended as a souvenir for the guest to take away with him. The silk or cambric is printed from the negative. There will be a rage for it if it once gets started, and people will have photographs printed on their curtains and tidies, and in handkerchief corners. The face of a beautiful young lady on the corner of a gentleman's handkerchief would be much more attractive than a monogram or initial letter. It would be just the thing for hat linings and bands." The Detroit *Free Press* suggests that not the least of the advantages of such photographing would be that the wash would be promptly returned if the missing pieces were to haunt the wretched laundress with a vision of her customers.

Illumination of Steam Boilers.

The lighting up of the interior of steam boilers was long ago suggested. It has lately been carried into practical operation by the Patent Steam Boiler Company, London. They arrange lights within the boiler in such a way that the cascades, currents, and miniature whirlpools of the water may be clearly observed. It is believed that useful information will be derived from the observations touching the cause of priming, the best modes of separating steam from the water, etc.

The Japanese Bronzes.

In a lecture on Japanese art, G. Richter gave the following description of their bronzes:

The manufacture of bronze appears to have been brought from China, as shown by the use of the word "kara-kana" for metal. This must have been very long ago, for the earliest European visitors to Japan found bronze cannon and firearms in use there.

Japanese bronzes contain copper and tin as their chief constituents, with the addition of a little lead or zinc. In the second half of the fifteenth century, Yuido, a friend of the painter Motorsubu, exersuted a great influence upon the development of the manufacture of bronze. He was master of the ornamental art and was celebrated for his great skill in making patterns and models.

The chief objects produced in Japan from bronze are figures, vases with flowers or birds, fishes, animals, dragons, censers, and incense vessels. Very great care is taken in making these, and they cast large dragons and other objects in one piece, which we have not yet succeeded in doing.

The best bronzes are those made for the temples. There is always a vase and a candlestick on the right and left of the god, in the middle is a censer, and below two lanterns or lamps. The old vases and candlesticks were not made in pairs, but single; they are now made in pairs for export. Great care was formerly expended in decorating the swords. The guard especially as well as the dagger and handle were decorated with the finest bronze. The sword guards as well as the dagger handles were made of iron inlaid with bronze.

Shakudo is a bronze of bluish black color and contains 3 per cent of gold. Shinbuichi is an alloy of 3 parts of silver to 1 of copper, and has a silver gray color.

The art of working iron in Japan has reached a stage that deserves mention. The richly ornamented old swords afford proofs of their skill in this art. Miyochin-Meneharu, who lived in the sixteenth century, was a master of this art. The British Museum possesses one of his works, a unique piece. It represents a sea eagle standing on a rock with outspread wings, bristling feathers, and claws sprawled out. Every feather is wrought, and the whole is so beautiful and true to nature that it justifies the use of the term unique.

It is not certain when the art of enameling was first introduced. It is positively asserted to have been known for centuries. In enameling objects made of copper the enamel is put on and made in the shape of a flower or arabesque and such like. The Japanese are so skillful in this that they first use one color and make everything that is to have that color first, then another color, and so on till the work is completed. Another and more complicated process, called *cloisonne*, uses gold thread rubbed with the juice of an onion, and this makes it adhere to the surfaces, and the figures are afterward filled out with enamel. In both processes the article is baked in a furnace until the enamel exhibits a luster or glossy surface. This is a sign that it is melted. The process must be conducted with great care, for if it is over-baked the enamel burns and falls off. It may also happen that in places where the enamel burns it thinner, it burns. When cool the roughness is removed by polishing by hand with a fine sandstone, and finally the enamel is polished.

Still another method of enameling consists in cutting figures from the metal. The depressions are filled with enamel and then all treated in the same manner. Plates of metal with raised or smooth enamel are used for inlaying chests and wooden articles.

Both kinds of enamel are applied to porcelain in many colors. Chinese *cloisonne* was long considered the best, but the Japanese now excel them in the beauty and purity of the colors and the art of decoration.—*Deut. Ind. Zeitung.*

Printed Calico.

The "fast" coloration of textile fibers depends on the penetration of the fiber by the coloring matter, or the materials which produce it, in a dissolved condition, and its subsequent conversion into an insoluble body. This process can be effected either by the operations of dyeing, or, as is more frequently the case in printing, by application and subsequent steaming. Among the steam colors there is a class the fixation of which depends on a quite different principle, *i. e.*, the albumen colors. Insoluble or indifferent colors are mixed with albumen, printed, and steamed. The albumen is congulated, and thus cements the color to the fiber. In examining printed goods the question may often arise whether the coloring matter has been produced within the fiber, or whether it has been fixed by the aid of albumen. If the swatch is macerated and teased out with a needle, so that the single fibers are separated, they appear, on examination with the microscope, uniformly colored through their entire mass, and translucent if they have been steeped in dissolved tinctorial substances. In colors applied by means of albumen the fiber itself appears as perfectly colorless, but in numerous places there are found adhering colored fragments of albumen.—*R. Meyer.*

SOME dealers, says the *Northwestern Lumberman*, are arguing in favor of lath of smaller dimensions. The old size of ⅜x1½ inches has given away to some extent to ⅜x1⅜, but less width is wanted, say ⅜x1⅜. The latter size would permit the loading of 60,000 lath in a car of 24,000 pounds, while but 50,000 can be loaded of the present size. Less plastering is required for the thin lath, and they are preferred by many on that account.

Are Nickel Cooking Utensils Poisonous?

Nickeled utensils were first made more than thirty years ago by the late Professor Boettger, but have recently become more popular, owing to the success that has attended Dr. Fleitmann's attempts to work nickel on a large scale, especially of malleable nickel that can be rolled. The increased favor which this brilliant silver white metal has met with recently has given rise to the question of its poisonous quality. Dr. Fleitmann does not consider the metal as poisonous. The *Polytech. Notizblatt*, formerly edited by Dr. Boettger, thus discusses this interesting question:

At the present time metallic nickel and its salts are prepared in a very pure state: the copper and arsenic frequently present in nickel ores are almost completely removed. Especial care is taken to remove the arsenic, because it would injure the color of the nickel plate.

In regard to the supposed poisonous nature of nickel, it may be remarked that nickel and copper alloys have long been in use for domestic utensils, as well as copper itself. Such vessels must, of course, be protected from acids and always kept clean and bright. When this is done, none of the metal passes into a soluble form. All metallic salts are more or less poisonous, even the salts of iron, to which the salts of nickel are more nearly related than to those of copper, which are indeed quite poisonous. Metallic vessels should always be kept clean, and this is true of nickel too, and then there is no need to concern ourselves about its poisonous character. It would be very desirable to have thorough and careful experiments made upon the physiological action of nickel salts when in solution.

Birnbaum has shown (in *Dingler's Journal*, ccxlix., 515) that solutions slightly acidified with acetic acid, as well as the juice of sour cherries, when left for some time in nickel vessels, takes up considerable quantities of nickel, which confirms the view above expressed that acid solutions should be kept as far away as possible from all such utensils and vessels.

We may add that Dr. J. M. Da Costa has been experimenting with nickel salts for medicinal uses, and finds that they have some efficiency in doses of one or more grains, three or four times a day. It does not produce the tonic effects of iron salts, but can scarcely be considered poisonous. The bromide can be substituted for other bromides and in smaller doses. This paper may be found in full in the *Medical Age*.

The Cotton Centennial of 1884.

The Board of Managers of the World's Industrial and Cotton Centennial, to be held at New Orleans in December, 1884, are showing energy in many directions in their endeavors to get the enterprise promptly under way. The design for the main building has been accepted, the one preferred out of ten submitted being that of G. M. Jorgensen, of Meridian, Miss. The building will have several towers but no dome, and will be lighted from the sides; it will cover an area of 900 by 1,500 feet, or a space of 31 acres, as compared with 21·47 acres occupied by the main building at Philadelphia. A tank and reservoir for cascades to be lighted by electric light is arranged for, and there will be a music hall to seat ten or twelve thousand people. In some leading directions the managers are taking the experience afforded by the exposition of 1876 as a guide, and are endeavoring to organize commissions from the several States in order to insure the thorough co-operation of all. They intend to make a feature of the exhibit of woman's work, and this department will be under the management of two leading representative women from each State and Territory.

The Peculiar Sky Appearance in Peru.

The remarkable aspect of the evening sky, noted in so many places in the United States and in England during the past month, and which has been attributed to the passage of the earth through a region of meteoric dust, has been observed also in Peru. A correspondent, writing from Tocopillo under date of October 28, says: "We first observed, on the evening of September 2, that after sunset the sky was overcast with a bright yellow light, which gradually became orange-colored. It lasted for about half an hour after sunset. Several nights later it was again seen, but the light was redder. It did not appear again until the night after the last new moon, but has been visible almost nightly ever since. It is seen on the greater part of this coast, and also in the interior."

Enameled Pasteboard.

The following process for enameling cardboard and pasteboard is taken from the *Papierzeitung:* Dissolve ten parts of shellac in a sufficient quantity of alcohol and add ten parts of linseed oil. To each quart of the mixture add also about ¼ ounce of chloride of zinc (solid?). The board may be immersed in it or the solution applied with a brush. The board is thoroughly dried and the surface is polished with sand paper or pumice before applying this preparation.

A COMPREHENSIVE map of the "Coke Regions" in the vicinity of Pittsburg, Pa., is in course of preparation by Alex. Y. Lee, C.E., of that city. The mills, foundries, and glass houses of Pittsburg will be located, and the lines of pipes laid for the introduction of natural gas are to be shown. The map will embrace the country from Connellsville to Neville Island.

An Emulsion of Castor Oil.

Julius Mulfinger contributes a note on emulsions to the *Pharmaceutische Centralhalle*. A physician in Brussels proposed to me the problem of preparing a cheap emulsion in very concentrated form for a patient suffering from skin disease. Five liters of oil were to be used in a full bath. Castor oil was selected as the cheapest easily emulsifiable oil, and the experiments were limited to this oil. It was not so easy to find a suitable emulsifying agent. Experiments were made with gum arabic, tragacanth, albumen, marsh mallow, linseed mucilage, soapwort, and decoctions of quillaya. Saponine and cholesterine were excluded, partially on account of the cost, and partially because some other experiments with them had failed. The emulsions with gum arabic and tragacanth held best, and after these marsh mallow and quillaya, but the latter was brown. The emulsions with linseed and soapwort were also unsightly and less permanent. All had one disagreeable quality—that of decomposing in from three to six days, smelling sour and becoming useless.

The numerous favorable results that had previously been obtained with quillaya as an emulsifier led me to try it again. It did not seem advisable to use the tincture because alcohol decomposes emulsions, but in spite of this fact very good results were obtained by shaking the tincture with water. Five parts of tincture of quillaya (5 to 1) were mixed with ninety-five of castor oil and thoroughly shaken; without water it formed a complete emulsion having the appearance of condensed milk, and was easily miscible in all proportions with water. Even in warm weather it showed no indications of change at the end of six weeks.

This emulsion mixed with equal parts of sirup of orange flowers or almonds is an excellent form for administering this laxative, otherwise so difficult to take.

I would add that when 10 per cent of the quillaya tincture is mixed with tincture of benzoin, water can be added to the mixture in any proportion and yet the resin remain permanently suspended, which it is often difficult to do in any other manner.

Process for Refining Vegetable Fibers.

Vegetable fibers, such as cotton, flax, jute, etc., are immersed for four hours in a bath of caustic soda at 12° B. Steam is then introduced into the bath in order to bring the temperature up to 80° C. The material is next brought into a solution of muriatic acid at 6° B., in order to remove the yellowish tint which is formed in the former bath. A thorough washing follows, and this is continued until the washings are completely neutral when tested with litmus paper. The bleaching is performed in a bath of hydrochloride of sodium at 7° B., the treatment lasting until a complete decoloration is obtained. The dried material is afterward introduced in a warm solution of glucose or sugar of 8° B., and left there for four or five hours, and afterward well dried. Then follows a treatment with a mixture of nitric and sulphuric acids, which transforms the sugar into nitro-saccharose, and the cellulose into binitro-cellulose. This is rinsed thoroughly in a hydro-extractor, and then brought into a boiling soap bath, and again rinsed. Then follows a mordanting with tannic acid or sumac in a bath at 30° C., and afterward with tartar emetic. It is stated that fiber so prepared is capable of being carded either alone or mixed with silk or silk waste. For this purpose it is wetted with a preparation consisting of water, olive oil, soap, and glycerine. —*M. Aubert.*

Ox Gall Soap for Silks.

The Berlin *Industrie Blatter* gives the following directions for an ox gall soap to be employed in cleansing silks and satins: One pound of cocoanut oil is heated to 30° (100° Fahr.) and half a pound of caustic soda stirred in very thoroughly. At the same time half a pound of white Venetian turpentine is heated and then stirred into this soap. The soap is left to stand covered up for four hours, then heated again just sufficiently to make it flow, when one pound of ox gall is well stirred in.

Some good curd soap, which is perfectly dry, is then pulverized, and enough of it stirred into the gall soap to make it solid, so that it yields but little to the pressure of the fingers. It will require from one to two pounds of curd soap to accomplish this. When the mass gets cold, it can be cut or pressed into cakes.

Tincture of Musk.

Vigier prepares the tincture of musk by first grinding up the musk with 95 per cent. alcohol to a fine impalpable powder that will remain in suspension for hours. He then adds the sirup and water. Four parts of alcohol to one of musk are sufficient, with two or three minutes' rubbing. The following are the proportions suggested, but the strength can be varied to suit the physician prescribing it:

R. Moschi	1	part, triturated with
Spiritus	4	"
Syr. simpl.	20	"
Distilled water	100	"

A NATIONAL Butter, Cheese, and Egg Convention met for a three days' session at Cincinnati, December 4. President John J. McDonald, of Philadelphia, said the value of the annual butter product of the United States was $352,000,000, and of the cheese product $36,000,000, with eggs and poultry about the same. Twenty-one States were represented by delegates, and Prof. Sheldon and Thomas Higgins were present representing the Royal English Dairy Association.

ENGINEERING INVENTIONS.

A traction engine has been patented by Mr. John E. Birch, of Winnipeg, Manitoba, Can. The object is to furnish a practical machine for road or farm work, and so, by special devices, the engine carries and takes up an endless track. By this means an extensive bearing surface is obtained for carrying the engine over soft or spongy ground, without danger of miring.

An improvement bearing on the present manner of heating railway cars has been patented by Mr. Michael Hurly, of Quebec, Canada. The invention relates to safety couplings for connecting steam conducting pipes, the two sliding parts of the coupling being connected together by a spiral spring, to secure a more perfect steam tight joint, etc.

A railway car truck has been patented by Mr. James E. Squire, of Glencoe, Ontario, Canada. Its construction is such that the load rests upon the periphery of the wheels in succession as they come under the treads, thus diminishing friction; the wheels are intended to turn only half as often as ordinary trucks with the same speed, so that less oil will be required and there will no danger of hot boxes.

A mine shaft elevator has been patented by Mr. Michael S. Coleman, of New York city. The carriages travel upon guide ropes extending down the shaft and are provided with means for readily attaching and detaching or tightening and slackening the ropes, and the arrangement is such that the elevator appliances may be conveniently and speedily removed when blasts are to be fired.

A grain car door has been patented by Mr. Benj. H. Gatton, of Bath, Ill. It is to be used inside of and together with the ordinary door, and is made of boiler plate or other suitable material of sufficient thickness to have ample strength for resisting the pressure of the grain. It is run in a groove along the door sill, opening sideways, and extends into the space between the outer and inner casings of the shell of the car body.

A car coupling, with a laterally swinging coupling hook pivoted to a rod secured to a buffer frame on the bottom of the car, has been patented by Mr. Chancey C. Haskin, of Waltham, Ia. A lever pivoted on the car has a curved arm with a bent end, which passes into a recess in the inner side of the coupling hook, and this lever is connected with an upwardly projecting lever swinging in a slot in the car floor.

A spark arrester for locomotives has been patented by Mr. Joseph Meier, of Plainfield, N. J., in which the smoke stack has two concentric tubes and two screens, with apertures in the inner tube, above and below the lower screen, and with an annular partition below the apertures below the lower screen, and within the space between the two tubes, whereby the sparks will be arrested and drop down through the middle tube into the smoke box.

An improved railroad rail joint has been patented by Mr. Jacob E. Moeller, of Centralia, Ill. This invention relates to that class of rail joints in which the chair is assisted by other parts to hold the ends of two contiguous rails in line, which is effected principally by a peculiar manner of applying and the shape of the fish plates, which are so placed as to brace from a seat between the chair and the base of the rail and the angle where the head and the web of the rail join, all to prevent lateral or spreading strain or longitudinal slip.

An improved eccentric spring car brake has been patented by Mr. James O'Donnell, of San Francisco, Cal. An eccentric spring brake disk is combined with a frame pivoted below the car floor; in this frame the shaft is journaled on which the brake disks are mounted, and on this shaft are two clutch pulleys, one of which is revolved by a chain or belt from one of the axles. The clutch pulleys are pressed together by a powerful spring when the brake disks are lowered, and thereby the brake disks are coupled, and the shaft carrying the brake disks is revolved. As soon as the shaft is raised a beveled wheel separates the clutch disks, and the shaft carrying the brake disks will no longer be revolved.

MECHANICAL INVENTIONS.

An improved machine for bending metal or strips to form kettle handles, roof cleats, etc., has been patented by Mr. Thomas R. Freeman, of Sioux Falls, Dakota Ter. It can be adjusted for bending roof cleats for flat seams or standing seams, or to make flanged angular plates of any desired angle.

An improvement in the manufacture of auger bits and other boring tools has been patented by Mr. George F. Stearns, of Chester, Conn. A malleable metal square shank and tang is first formed in one piece, with a recess to receive the round shank, then the square shank is welded to a round steel shank, and the thread is cut on the tang.

An improved compound metal working machine has been patented by Mr. Gilbert McDonald, of Georgetown, N. M. It is a peculiar construction and combination of devices in a metal punch or shears, to facilitate work on hot or cold metals, with a minimum of applied power, due to the improved compound lever and eccentric devices employed.

An attachment for a watchmaker's lathe more particularly, or for supporting, steadying, and working small articles, and to facilitate the accurate turning and drilling of the same, has been patented by Mr. Herman M. Potter, of Williamsport, Pa. It combines in one device an adjustable dead center and an adjustable countersunk center.

An improvement in well drilling machines has been patented by Mr. Thomas J. Hathaway, of Montevallo, Mo. The machine here provided for is arranged on the bed frame of a wagon, and the drill and the rope are turned by the rotation of the turn table for working the drill, the length of the stroke being the same whether the team goes fast or slow. A great saving of time and labor is also effected by the arrangement of the drill to be worked on the wagon bed, without unloading or taking apart.

An improved scraper and elevator has been patented by Mr. Titus H. Apple, of Evansburg, Pa. An elevator trough is journaled to swing on the fore part of a sled or wagon, the lower end of which can be tipped down to rest flat on the ground and form a scraper. Transverse shafts are journaled in this trough at both ends, on which are sprocket wheels, carrying endless chains, to which are attached scraper blades. At the upper end there is an opening in the bottom of the trough through which the dirt, snow, dust, stones, etc., carried up by the scraper may be discharged into the wagon or sleigh.

AGRICULTURAL INVENTIONS.

A combined land roller and clod crusher has been patented by Mr. Andrew Helman, of Winfield, Kas. The invention consists of a combined land roller, clod crusher, and harrow. Three parallel upright plates are connected by jointed shafts carrying rollers, circular cutters, cultivating teeth, and scrapers, so the ground will be smoothed, the clods crushed, and the soil loosened.

An improved double harrow has been patented by Messrs. Edmund L. Nash and Benjamin R. Pennybacker, Jr., of Parkersburg, W. Va. The rod to which the sections are hinged has the bent portion at its forward end, the double tree loosely connected to said rod, and spring draught attachments connecting the ends of the double tree with the centers of the said sections.

An invention in sulky plows to prevent the tongue from springing down, make depth of plowing more uniform, and increase the durability of plows has been patented by Mr. Seymour E. Seelye, of Hudson, Mich. The idea of the construction is, the sections of tension rod are jointed directly under the joint of the pole, so that both may be turned together laterally and correspondingly.

An improved potato digger has been patented by Mr. John Shannon, of Wixom, Mich. From a two wheeled truck a shaft is extended to the rear, which carries curved prongs or teeth that, with the rotation of the axle, are made to dig up the potatoes in about the same manner as they would be dug by a fork. The digger shaft revolves about twice as fast as the axle, and has a gathering attachment and conveyer.

An improved riding harrow has been patented by Mr. Thomas L. Cone, of Brest, Mo. The frame has duplicate sections hinged together, which permit of up and down motion independent of each other. The seat board has a double attachment so that the weight of the driver will come where the harrow would otherwise do the lightest and poorest work, thus making it more effective than ordinary harrows.

A combined harrow, roller, seeder, and cultivator has been patented by Mr. James D. McKinnon, of Portland, Ore. The harrow teeth are bent upward and backward with reference to the direction in which the harrow revolves, to beat down and pulverize clods to the best advantage, but the teeth are screwed into the cylinder so they can be changed for another form for different kinds of work, and the harrow may be raised or lowered or suspended above the ground. There is a detachable roller shell, and over the harrow is a seed hopper, in which a rotary seed dropper may be arranged.

MISCELLANEOUS INVENTIONS.

An improvement in composition for gilt mouldings has been patented by Mr. Louis Eberle, of Altoona, Pa. The composition consists of stick lac, sandarac, galipot, gamboge, dragon's blood, and alcohol.

Mr. Hugh Pound, of Portage, Wis., has patented an improvement in slop buckets. The construction is such that the bucket may be filled or emptied without entirely removing the cover, and the cover is made self-closing, so that the bucket is very convenient and at the same time cheap and practical.

An improvement in base balls, or balls for any games where they are subjected to rough usage, has been patented by Mr. William B. Melot, of Fleetwood, Pa. It consists in having the cover fastened upon the ball by stitching which is entirely upon the inside, and is not exposed or apparent upon the exterior at all.

An improved pipe wrench has been patented by Mr. Conrad D. Volkmann, of Nappanee, Ind. It is of that class of wrenches adapted to engage the surface of a round bar of iron or pipe and turn the same when moved in one direction, but to disengage itself when moved back. Its peculiarity consists in having a jaw of special form opposed by two smooth movable jaws.

An overshoe for horses has been patented by Mr. James W. Smith, of Jersey City, N. J. Its object is to prevent the slipping of horses on icy and slippery roads and inclines. The shoe has heavy and strong steel edged calks, and can be buckled on or removed very quickly; it affects no change in the use of the usual horseshoe.

An improved bag and twine holder has been patented by Mr. Walter R. Poage, of Shelbyville, Mo. It consists of a suspended ring or disk of metal or wood, and having a series of horn-shaped prongs projecting therefrom, for suitably suspending paper bags, and also a twine holder in connection therewith, for conveniently suspending the bags and twine over the counter.

A toy kitchen forms the subject of a patent which has been issued to Mr. Max Miller, of Brooklyn, N. Y. The invention covers a toy kitchen with a tank held removably to the side, and water can be drawn therefrom by pressing the knob of a faucet without shaking and jarring the toy kitchen, and throwing down the dishes, and avoiding to a great extent the splashing and spilling of water.

A tricycle has been patented by Mr. Henry K. Shauck, of Dayton, O. The improved construction is intended to better adapt the vehicle for general use. The axle is connected to the yoke of the guide wheel by a low pendent frame and goose neck, thus forming an open sided vehicle specially convenient for women, and one that can be used to advantage by persons of but little physical strength.

An automatic stop plug for gas pipes has been patented by William F. Cosgrove, of Jersey City, N. J. The object of the invention is to prevent the flames in burning buildings from being fed by gas from escaping gas pipes, which is effected by a particular arrangement of a screw and fusible nut, so that, should the temperature rise above the melting point of the nut, a plug will drop and close the passage automatically.

An improved neck yoke for double teams, to support and guide the team pole, has been patented by Mr. Joshua W. Harris, of Waynesborough, Va. Its object is to provide means whereby a yoke of the required strength may be made lighter and of a smaller piece of lumber, collars being driven on each end of the neck yoke in lieu of cut rings and secured by screws, and the clasp being dispensed with.

An improved door check has been patented by Mr. William H. Herrick, of Grinnell, Iowa. A spring bar or strip has one end fast to the bottom edge of the door and the other resting on the floor, the free end being provided with a cushion to produce friction; this free end can be held from the floor, and to the bottom of the edge of the door, in case the door holder is not to be used.

A process of laying pavements has been patented by Mr. William McLean, of Los Angeles, Cal. It relates to that class of pavements usually made of concrete, and provides means whereby encaustic tiles, or tiles and stones, may be laid in combination with concrete, for sidewalks or other pavements, the intention being that each section shall form one piece, so that shrinking will not change its level relative to contiguous sections.

An improved fence has been patented by Mr. Grant M. Wadsworth, of Sugar Grove, Pa. It combines, with diagonal cross bars, a metallic plate nailed to and between said bars and projecting above their junction, to form a support for one end of a top rail; there is a bottom cross tie, and top and bottom stringers notched to fit over said plates. Wires may also be used in the construction, for which a suitable straining device is proposed.

A storm coat of special design forms the subject of a patent which has been issued to Messrs. William P. Dodge, of Prospect, and John Cummings, Jr., of Utica, N. Y. The coat has a lap or apron made a part of the front opening, and adapted to be folded and buttoned on the inner surface of that side to which it is fastened, or to the other side after having been passed over the front of the body, thereby affording better protection against rain or snow.

A marine drag has been patented by Mr. Ambrose J. Clarke, of Brooklyn, N. Y. It has a shank provided with stationary runners, to which are hinged the ribs and a movable runner, to which are attached the stretchers. The ribs and stretchers are hinged to each other, and to the ribs are hinged the edges of triangular plates, having the other edges of the adjacent plates hinged to each other, so the drag will be opened by the resistance of the water.

An improvement in two wheeled vehicles has been patented by Mr. John C. Bach, of Hillsdale, Mich. This invention is designed to meet a want widely felt since two wheeled carriages have recently become very fashionable. The body is so pivoted as to oscillate at its rear end, and a centrally arranged spring is so made to operate that the body is protected from the swing of the horse, so as to prevent the forward and backward rocking motion of the rider.

An improved saw tab has been patented by Messrs. John D. Ryan and Paul Lane, of East Saginaw, Mich. It is for use with gang and other saws for connection of the buckles used in stretching the saws, and can be applied without the rivets now required; also when in place the strain is not upon the rivets, but on lugs of ample strength; it may likewise be removed easily without injury, being practically indestructible by ordinary use.

An invention to facilitate the bottling of liquids and prevent waste thereof has been patented by Mr. Alfred Rigny, of New York city. The faucet has a tube to enter the bottle, with a valve at its lower end attached to rods passing up the outside of the tube, and connected with a sliding collar, so the valve can be readily opened and will be automatically closed. Means are also provided for the free escape of air as the bottle is being filled.

A hotel and burglar alarm electric annunciator has been patented by Mr. Wm. S. Corwin, of Newark, N. J. The annunciator has a crank shaft with fingers, so all downdrops can be raised at one operation. The shaft is automatically brought back to proper position. The electric connections are such that the current can be made to cause continual ringing of the bell without effecting the magnets and drops, and one part of the apparatus can be tested without affecting the other.

A micrometer calipers has been patented by Mr. Leopold L. Remacle, of New York city. While it can be folded compactly and used to measure considerable spaces, it will likewise measure twentieths and thousandths of inches. A screw works longitudinally in a U-shaped frame, and the rimmed head of the screw is divided into measures; against this head, when the calipers are in use, is brought down a pivoted straight edge rule. The pitch of the screw being one-twentieth of an inch, and its rimmed head being marked off into parts, any required measurement as low as thousandths of an inch can be readily obtained.

An improved ice cream freezer has been patented by Mr. Dudley W. Curtis, of Pomeroy, Ohio. An outer cylinder, which may be surrounded by ice, holds the cream; in the larger cylinder is placed an inner ice cylinder, pivoted at the bottom and held in position by an annular head at the top. At the sides of this inner cylinder are arms or wings, which, as the former is rotated, prevent the cream from freezing in lumps. These arms may be rigid, but preferably are made so that, rotating in one way they will fold against the cylinder, for convenience in withdrawing the ice chamber, while by turning the other way they will divide up the cream.

Business and Personal.

The Charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Iridio-Copper, manufactured by the American Iridium Co., Pearl and Plum Sts., Cincinnati, Ohio, is superior to bronze metal for journal bearings of accurate and high running machinery, being hard and slightly porous.

Pumps—Hand & Power, Boiler Pumps. The Goulds Mfg. Co., Seneca Falls, N. Y., & 15 Park Place, New York.

Wanted to purchase.—A patent of merit. Chas. Babson, Jr., dealer in patents, 24 Congress St., Boston, Mass.

For Sale.—Superior Amateur Lathe, with every tool needed to work wood and metals. M. P. Smith, Waverly, Md.

"Character in Smoking" is the title of an excellent article recently published. The writer judges his men by the kind of tobacco they smoke. All like good tobacco, but all are not judges. It is only the even tempered, level-headed, tastefully inclined man that takes pains to make a selection. He gets to be very particular about purity and flavor. But when he strikes a tobacco like Blackwell's Durham Long Cut he is tenacious of his prize, and intolerant of all inferior tobaccos.

Wanted.—Having ample facilities, I want some new article of merit, or a specialty (wood working preferred) to manufacture on royalty, or otherwise, and introduce to home and export trade. Address with particulars, Edwin L. Jones, No. 413 South 5th Street, Philadelphia, Pa.

Fox's Corrugated Boiler Furnace, illustrated on page 354. Hartmann, Le Doux & Maecker, sole agents, 134 Pearl Street, New York.

One 12 inch Weston Dynamo Electric Machine in good order, for sale at one-half price. Address P. O. Box 488, Hartford, Conn.

Wanted.—A man to organize and manufacture a cheap article of hardware. Must be ingenious in the adaptation of quick working tools. Jones of Binghamton, Binghamton, N. Y.

Drawing Instruments, Drawing Paper, and Drawing Materials. The largest stock in the United States. Send for catalogue. Queen & Co., Philadelphia.

Corliss Steam Engines at a bargain.
One 12" x 42"; one 16" x 36"; one 20" x 42".
All in first-class running order.
Henry I. Snell, 135 North 3d St., Philadelphia, Pa.

Useful information and tables on Steam and Water for Engineers and others contained in Blake's new illustrated catalogue of steam pumps and pumping engines, just published. Copies sent free, Address Geo. F. Blake Mfg. Co., 95 and 97 Liberty St., New York.

Dies, Patterns, etc., Chas. A. Bailey, Middletown, Ct.

Steam Pipe and Boiler Covering. Roofing Paints, Prepared Roofing, and general line of Asbestos materials. Phil Carey & Co., 127 Central Avenue, Cincinnati, O.

For Sale.—Five patents entire, Nos. 235,844, 244,414, 254 251, 247,286, 268,545. Paper Pulp Engine. Pay as speciality. J. R. Abbe, Manchester, N. H.

For Freight and Passenger Elevators send to L. S. Graves & Son, Rochester, N. Y.

Best Squaring Shears, Tinners', and Canners' Tools at Niagara Stamping and Tool Company, Buffalo, N. Y.

Lathes 14 in. swing, with and without back gears and screw. J. Birkenhead, Mansfield, Mass.

The Best.—The Dueber Watch Case.

If an invention has not been patented in the United States for more than one year, it may still be patented in Canada. Cost for Canadian patent, $40. Various other foreign patents may also be obtained. For instructions address Munn & Co., SCIENTIFIC AMERICAN Patent Agency, 261 Broadway, New York.

Guild & Garrison's Steam Pump Works, Brooklyn, N. Y. Steam Pumping Machinery of every description. Send for catalogue.

Nickel Plating.—Sole manufacturers cast nickel anodes, pure nickel salts, polishing compositions, etc. Complete outfit for plating, etc. Hanson & Van Winkle, Newark, N. J., and 92 and 94 Liberty St., New York.

Lists 29, 30 & 31, describing 4,000 new and 2d-hand Machines, ready for distribution. State just what machines wanted. Forsaith & Co., Manchester, N. H., & N. Y. city.

For Power & Economy, Alcott's Turbine, Mt. Holly, N. J.

"Abbe" Bolt Forging Machines and "Palmer" Power Hammers a specialty. Forsaith & Co., Manchester, N.H.

Railway and Machine Shop Equipment.
Send for Monthly Machinery List
to the George Place Machinery Company,
121 Chambers and 103 Reade Streets, New York.

"How to Keep Boilers Clean." Book sent *free* by James F. Hotchkiss, 84 John St., New York.

Wanted.—Patented articles or machinery to make and introduce. Gaynor & Fitzgerald, New Haven, Conn.

Water purified for all purposes, from household supplies to those of largest cities, by the improved filters manufactured by the Newark Filtering Co., 177 Commerce St., Newark, N. J.

Improved Skinner Portable Engines. Erie, Pa.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Vocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Supplement Catalogue.—Persons in pursuit of information on any special engineering, mechanical, or scientific subject, can have catalogue of contents of the SCIENTIFIC AMERICAN SUPPLEMENT sent to them free. The SUPPLEMENT contains lengthy articles embracing the whole range of engineering, mechanics, and physical science. Address Munn & Co., Publishers, New York.

Machinery for Light Manufacturing, on hand and built to order. E. E. Garvin & Co., 139 Center St., N. Y.

Philosophical and Chemical Apparatus and Materials. Send for catalogue. Queen & Co., Philadelphia.

Fossil Meal Composition, the leading non-conducting covering for boilers, pipes, etc. See adv., p. 382.

Catalogues free.—Scientific Books, 100 pages; Electrical Books, 14 pages. E. & F. N. Spon, 35 Murray St., N. Y.

Straight Line Engine Co., Syracuse, N. Y. Best in design, materials, workmanship, governing; no packing.

Drop Forgings. Billings & Spencer Co. See adv., p. 333.

For Mill Mach'y & Mill Furnishing, see illus. adv. p. 332.

Curtis Pressure Regulator and Steam Trap. See p. 349

Mineral Lands Prospected, Artesian Wells Bored, by Pa. Diamond Drill Co. Box 423. Pottsville, Pa. See p. 354.

C. B. Rogers & Co., Norwich, Conn., Wood Working Machinery of every kind. See adv., page 350.

Ajax Metal Company, Phila. Clamer's Ajax Metals for railroad, rolling mill, engine bearings, cocks, and valves.

Fire Brick, Tile, and Clay Retorts, all shapes. Borgner & O'Brien, M'f'rs, 23d St., above Race, Phila., Pa.

Drop Forgings of Iron or Steel. See adv., page 354.

Bradley's Road Cart, Syracuse, N. Y. See p. 366.

Diamond Planers. J. Dickinson, 64 Nassau St., N. Y.

Steam Hammers, Improved Hydraulic Jacks, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Emerson's 1884 Book of Saws. New matter. 75,000. Free. Address Emerson, Smith & Co., Beaver Falls, Pa.

Hoisting Engines. Friction Clutch Pulleys, Cut-off Couplings. D. Frisbie & Co., Philadelphia, Pa.

Gould & Eberhardt's Machinists' Tools. See adv., p. 365.

Barrel, Keg, Hogshead, Stave Mach'y. See ad., p. 365.

Magic Lanterns and Stereopticons of all kinds and prices. Views illustrating every subject for public exhibitions, Sunday schools, colleges, and home entertainment. 116 page illustrated catalogue free. McAllister, Manufacturing Optician, 49 Nassau St., New York.

Lightning Screw Plates, Labor-saving Tools, p. 348.

Hand and Power Bolt Cutters, Screw Plates, Taps in great variety. The Pratt & Whitney Co., Hartford, Ct.

For best low price Planer and Matcher, and latest improved Sash, Door, and Blind Machinery, Send for catalogue to Rowley & Hermance, Williamsport, Pa.

Woodwork'g Mach'y. Rollstone Mach. Co. Adv., p. 366.

Amateur Photographers can have their negatives printed or enlarged by Rockwood, No. 17 Union Square.

The Porter-Allen High Speed Steam Engine. Southwork Foundry & Mach. Co., 430 Washington Ave., Phil. Pa.

Aneroid Barometers, Mercurial Barometers, Thermometers, Anemometers, Hydrometers, Hygrometers. Send for catalogue. Queen & Co., Philadelphia.

Notes & Queries

HINTS TO CORRESPONDENTS.

No attention will be paid to communications unless accompanied with the full name and address of the writer.

Names and addresses of correspondents will not be given to inquirers.

We renew our request that correspondents, in referring to former answers or articles, will be kind enough to name the date of the paper and the page, or the number of the question.

Correspondents whose inquiries do not appear after a reasonable time should repeat them. If not then published, they may conclude that, for good reasons, the Editor declines them.

Persons desiring special information which is purely of a personal character, and not of general interest, should remit from $1 to $5, according to the subject, as we cannot be expected to spend time and labor to obtain such information without remuneration.

Any numbers of the SCIENTIFIC AMERICAN SUPPLEMENT referred to in these columns may be had at the office. Price 10 cents each.

Correspondents sending samples of minerals, etc., for examination, should be careful to distinctly mark or label their specimens so as to avoid error in their indentification.

(1) W. H. N. asks (1) how to blue the locks and metal parts of rifles such as they are blued when new, and also how to color the ride barrel a solid blue color. A. If the articles are small, heat them in a sand bath until they attain the desired color. They will not color evenly unless well polished and thoroughly clean. Sometimes articles are heated until they pass the blue color and become gray, they are then cooled and heated again until the desired blue tint appears. 2. Are there any small electric motors made, run by a battery that are suitable to run sewing machines and such light work? If so, inform me about amount of battery, required. A. You will find a small electric motor advertised in our columns. It is driven by a six cell bichromate battery.

(2) F. C. R. asks how curled hair is made, that is, hair that is used for hair mattresses; how the curl is put into the hair. A. Hair for curling is twisted very tight into a rope of one strand, then steamed or boiled for a short time, rinsed in hot water enough to clear of dirt and stain, then dried in an oven. Then left a short time to set, when it is ready for the market and picking.

(3) F. H. B. asks: 1. Is the sun at noon half way between sunrise and sunset? Is the shadow caused by the sun shining against an upright post on earth always in the same direction at noon? By noon I mean 12 o'clock sharp. A. The shadow from your upright post, as also upon all sun dials, varies with the seasons. In your almanac you will observe a record through the various months of "sun slow" "sun fast," with the amount in minutes which you must apply in observing the noon mark upon a sun dial or its equivalent, the shadow from the post. If your horizon is level, the sun will mark true noon on the dial on four days in the year, viz., 25th December, 16th April, 16th June, 1st September, at half way between sunrise and sunset. The sun is now (November 10) about 16 minutes too fast, so that it arrives at the meridian or noon mark 16 minutes before 12 M.

(4) C. H. asks if there is anything in existence for soldering which will not cause rust afterward. Acid and ammonia will produce rust after soldered even if washed off, etc.; sometimes it will rust again, especially on anything like polished iron or steel. A. Dip the articles after they have been soldered into boiling water for several minutes. Then wash off in cold water, and we think the difficulty you mention will be obviated.

(5) C. W. asks how to make a good and cheap cherry stain for wood. A. Take 3 quarts rain water; annatto, 4 ounces; boil in a copper kettle till the annatto is dissolved, then put in a piece of potash the size of a walnut; keep it on the fire about half an hour longer, and it is ready to bottle for use.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

November 27, 1883,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Acid, apparatus for concentrating sulphuric, S. T. McDougall ... 289,238
Album clasp, A. Pflueger ... 289,133
Album clasp, Vorpahl & Pohl ... 289,303
Animal trap, G. W. Jolly ... 289,268
Annunciator, hotel and burglar alarm electric, W. S. Corwin ... 289,223
Awl, belt, Lothrop & Hewins ... 289,009
Back bands, draught chain loop for, Smither & Carlisle ... 289,137
Bag holder, L. Valentine ... 289,181
Baling press, P. Wright ... 289,364
Ball. See Game ball. Return ball.
Band cutter and feeder, C. B. Scherer ... 289,090
Barrel cover, H. C. Barnes ... 289,205
Bath and wash tub, L. J. Groom ... 289,345
Bicycle saddle, T. J. Kirkpatrick ... 289,272
Bit. See Expansion bit.
Blind, inside, W. Teuteberg ... 289,176
Block. See Paving block.
Boat. See Life boat.
Boiler. See Steam boiler.
Book clamp, F. E. Halliday ... 289,252
Boot and shoe tips, apparatus for skiving, J. A. Safford ... 289,145
Boot treeing machine, J. Warren ... 289,044
Boring machine, wood, M. Sweet ... 289,170
Bottle stopper and fastener, F. Burns ... 289 215
Bottles, head for siphon, J. Brown ... 289,063
Bow, cross, H. G. Lewis ... 289,283
Box. See Journal box. Paper box. Toy money box.
Brake shoe, G. B. Simonds ... 289,318
Brick and tile machines, endless chain carrier for, F. A. Smith ... 289,009
Brick kiln, J. W. Penfield ... 289,024
Bridle, E. Ward ... 289,193
Bucket, slop, H. Pound ... 289,135
Building front, P. H. Jackson ... 289,105
Button, C. Radcliffe ... 289,198
Button and glove hook, F. B. Bracking ... 289,213
Button hook, G. Havell ... 289,095
Button, sleeve or collar, Allen & Richardson ... 288,964
Buttons, attaching, G. W. Prentice ... 289,196
Calendar, S. D. Styles ... 289,167
Can filling machine, L. H. Smith ... 289,155, 289,156
Car brake, J. O'Donnell ... 289,128
Car brake, G. A. Small ... 289,314
Car brake, automatic, W. B. Guernsey ... 289,091
Car, cable railway, C. W. Rasmussen ... 289,139
Car coupling, J. Cochran, Jr ... 289,228
Car coupling, J. B. Harrod ... 288,999
Car coupling, I. Holland ... 289,002
Car coupling, Nyce & Hunsicker ... 289,357
Car coupling, B. Taylor ... 289,172
Car coupling, J. A. Whittemore ... 289,049
Car door, grain, B. H. Gatton ... 289,247
Car door lock, J. H. Fisher ... 288,989
Car shifter, W. H. Lind ... 289,006
Car, sleeping, H. S. Hale ... 289,346
Car wheel, E. K. Righter ... 289,143
Car wheel chill, contracting, J. N. Barr ... 288,960
Cars, heating railway, M. Hurly ... 289,265
Carbon conductors, apparatus for treating, E. Weston ... 289,337
Card scoring machine, Strachan & Henshaw ... 289,162
Carriage spring, J. J. Fetzer ... 289,078
Carpet stretcher, J. Lindsay ... 289,007
Carrier. See Trace carrier.
Cart, road, N. P. Anderson ... 288,905
Cartridge wad retainer, J. T. Walker ... 289,191
Case. See Egg cell case. File case. Match case.
Caster, glass, D. C. Ripley ... 289,027
Chain, pitch, A. H. Wallis (r) ... 10,413
Chamber and slop bucket, combined, A. G. Mack ... 289,011
Chenille weft and manufacturing the same, W. Adam ... 289,203
Cigar clipper and perforator, combined, Klaiber & Currier ... 289,351
Clamp. See Book clamp.
Clasp. See Album clasp.
Clasp, E. S. Smith ... 289,158
Clay crushing and grinding roller, J. W. Penfield. 289,045
Clay crushing and pulverizing roller, J. W. Penfield ... 289,046
Cleaner. See Gun barrel cleaner.
Clothes line coupling, A. F. Brewer ... 289,334
Clothes pounder, McCready & Alshouse ... 289,203
Clutch, J. Gibbins ... 289,249
Coat, Dodge & Cummings, Jr ... 289,236
Coffee roaster and corn popper, P. B. Sheldon ... 289,312
Commode, Sullivan & Tobin ... 289,168
Compass, mariner's, E. Bisson ... 289,209
Copy holder and book rest, combined, G. Weinschenk ... 289,195
Cores and moulds, apparatus for forming, F. Shickle ... 289,087
Cornice, J. M. Montgomery, Jr ... 289,299
Cotton opener, R. Kitson ... 289,004
Coupling. See Car coupling. Clothes line coupling. Crank coupling. Thill coupling.
Cracker machine, Fowler & Rockwell ... 288,989
Crank coupling, E. E. Hyatt ... 289,266
Cuff holder, J. F. Atwood ... 289,057
Cultivator, J. H. Albright ... 289,055
Cultivator, R. D. Hall ... 289,093
Cultivator, R. K. Nichols ... 289,127
Cupeling furnace, B. Roesing ... 289,143
Cutter. See Band cutter.
Dog irons, chill mould for, N. Zins ... 289,306
Door check, W. H. Herrick ... 289,259
Door lock, Schilling & Massar ... 289,081
Doors, stay roller for sliding, W. Cronk ... 288,980, 288,981
Doubling silk, etc., stop motion for machines for, T. S. McElhose ... 289,117
Drag, marine, A. J. Clarke ... 289,224
Drawer pull, F. Frank ... 289,245
Drawer pull, J. G. Hallas ... 289,251
Drill. See Rock drill.
Drilling machine, hand, D. E. Kempster ... 289,110
Drum, heating, Weamer & Zimmerman ... 289,045
Edger attachment, S. W. Viets ... 289,184
Egg cell case, J. Lynam ... 289,010
Electric cable, W. Halkyard ... 289,093
Electric circuit breaker, E. Weston ... 289,189
Electric currents, system of generating and regulating, E. Weston ... 289,334
Electric machine, dynamo or magneto, E. Weston ... 289,300
Electric machine regulator, dynamo or magneto, E. Weston ... 289,335
Electrical cable, S. D. Strohm ... 289,164 to 289,166
Electrical generator regulator, E. Weston ... 289,338
Electrical transmission of power, apparatus for regulating and controlling the, E. Weston ... 289,198
Electro magnetic motors, safety cut-out for, E. Weston ... 289,197
Elevator. See Mine shaft elevator.
Elevator and conveyor, I. N. Matlick ... 289,291
Elevator safety guard, W. A. Ingalls ... 289,350
Engine. See Gas engine. Rag engine, Steam engine. Traction engine.
Engine register, C. Chambers, Jr ... 288,976
Engine running gear, suspension, J. H. Race ... 289,306
Engine slide lubricator, M. S. Cabell ... 289,066
Expansion bit, G. Nichols ... 289,126
Fare collector for passenger cars, B. G. Fitzhugh. 289,341
Fat or oxyline, deodorized, J. Hobbs ... 289,100
Feed bag attachment, J. H. Palmer ... 289,139
Feeding device for horses, T. L. Brooks ... 289,214
Fence, G. M. Wadsworth ... 289,189
Fence, metallic, C. Hanika ... 289,253
Fence post, S. E. Hyndman ... 289,349
Fence post, metallic, D. B. Scott ... 289,149
Fence, wire, C. H. Barr ... 289,207
Fifth wheel, vehicle, W. W. Grier ... 289,097
File case, A. W. Volta ... 289,042
Filter and cooler, combined water, E. J. Howe ... 289,263
Firearm, breech-loading, D. S. Cole ... 289,070
Firearm, breech-loading, D. Kirkwood ... 289,273
Firearm, magazine, P. Mauser ... 289,113
Firearms, sight for small, T. Gilbert ... 289,081
Fire escape, Borst & Will ... 289,061
Fire escape, T. T. Church ... 289,220
Fire escape, D. L. Garver ... 289,080
Fire escape, W. A. Holbrook ... 289,101
Fire escape, B. C. Margiloth ... 289,286
Fire escape, J. Metager ... 289,119
Fire escape, P. P. Pealer ... 289,304
Fire escape, T. B. Smith ... 289,318
Fire escape, L. Strachl ... 289,163
Fire escape, J. S. M. Wilcox ... 289,050
Fire escapes, fireproof box for, B. C. Margiloth ... 289,287
Fireproof compound, K. A. Hohenstein ... 289,262
Fireproofing composition, J. H. Nolan ... 289,032
Floor, fireproof, A. J. Campbell ... 289,218
Flower pot, M. Holden ... 289,102
Frame. See Quilting frame. Spinning frame.
Fruit, apparatus for drying and conserving, D. Burr ... 288,978
Fruit jar, J. L. De Steiger ... 288,983
Fruit jar, A. S. Lambert ... 289,276
Fruits and flowers, cutter and holder for, P. McDonald ... 289,116
Furnace. See Cupelling furnace. Saw heating furnace. Smoke consuming furnace.
Furnaces, apparatus for feeding fuel to, McMillan & Robertson ... 289,254
Gauge. See Printing press feed gauge. Water gauge.
Game apparatus, H. T. W. Walker ... 289,043
Game apparatus or toy target, C. Sears ... 289,052
Game ball, W. B. Melot ... 289,297
Game table, G. Calder ... 289,217
Gas, apparatus for generating heating or illuminating, J. E. Leadley ... 289,278
Gas cut-off, automatic, R. W. H. Kopp ... 289,274
Gas engine, L. H. Nash ... 289,019
Gas engine, F. W. Turner ... 289,262
Gas furnace, recuperator, J. F. Rittweger ... 289,308
Gas, process of and apparatus for manufacturing, J. E. Leadley ... 289,279 to 289,281
Gate. See Sewer gate.
Generator. See Steam generator.
Governor, steam engine, Galloway & Beckwith ... 289,246
Grain, etc., apparatus for transferring, L. Smith ... 289,316
Grain header, J. A. Rumrill ... 289,144
Grain transferring apparatus, mouth piece for, L. Smith ... 289,315
Grinding and polishing machine, E. R. Ware ... 289,333
Guard. See Elevator safety guard. Handle guard. Switch guard.
Gun barrel cleaner, J. C. Petmecky ... 289,132
Gun lock, A. T. Brown ... 289,052
Hame, C. Roehl ... 289,042
Handle guard, ax and tool, G. P. Morrill ... 289,123
Harness loop, J. Kearwille, Jr ... 289,269
Harrow, riding, T. L. Cone ... 289,132
Harrow, roller, etc., combined, J. D. McKinnon ... 289,118
Harrow tooth holder, F. W. Herrmann ... 289,260
Harvester, C. M. Grim ... 289,090
Harvester wheel, J. R. Severance ... 289,150
Hat brim curling machine, J. Wilson ... 289,202
Hat drying apparatus, Dunlap & Ketchum, Jr ... 288,987
Hat felting machine, E. Eickemeyer ... 288,243
Hats, manufacture of, Dunlap & Ketchum, Jr ... 288,986
Hatch, etc., automatic, C. Chapman ... 289,068
Hay rake, horse, E. Glendillen ... 289,083
Heater. See Water heater.
Hedge trimmer, M. M. Curtis ... 289,074
Hen house, S. Rawson ... 289,307
Hinge, spring, L. M. Devore ... 288,984
Hoist, ash, J. D. Spreckels ... 289,159
Holder. See Bag holder. Copy plate holder. Cuff holder. Harrow tooth holder. Photographer's camera holder. Whip holder.
Hook. See Button hook. Button and glove hook.
Horse power, J. Smith ... 289,164
Horseshoe, C. F. A. Zincke ... 289,330
Horseshoe, detachable, Thomas & Betzer ... 289,177
Hose reel, automatic, L. W. Stockwell (r) ... 10,412
Hub band, G. W. Endebrock ... 289,239
Huller. See Seed huller.
Ice cream freezer, D. W. Curtis ... 289,236
Indicator lock, M. Welsh ... 289,196
Infant's seat, A. E. McDonald ... 289,115
Intestines, machine for cleaning, C. Nida ... 289,302
Iron, purifying molten, W. Griffith ... 289,085 to 289,089
Ironing machine, H. Schmidt ... 289,148
Ironing table, C. W. L. Hayward ... 289,097
Jacketed vessel, L. Fritz ... 289,080
Jar. See Fruit jar.
Joint. See Knuckle joint. Railway rail joint.
Journal box, Worswick & Cutter ... 289,053
Key, T. Lincoln ... 289,284
Key seat cutting machine, G. W. Bonds ... 289,060
Kiln. See Brick kiln.
Knife. See Rag joining knife.
Knob attachment, E. L. Phipps ... 289,305
Knuckle joint, universal angular, E. Mignault ... 289,120
Ladder, step, J. J. Baldwin ... 289,059
Lamp switch, electric, G. T. Benson ... 288,971
Land roller, clod crusher, and harrow, combined, A. Holman ... 289,258
Lantern, R. L. Hull ... 288,949
Lathes, work rest for wood turning, N. Goisen ... 288,994
Leather and a substitute therefor, patent, J. B. Edson ... 289,241
Life boat, M. Bacon ... 289,206
Life-preserving mattress, W. Miller ... 289,122
Lightning conductor, T. H. Dodge ... 289,070
Line loop, J. Hudson ... 289,264
Liquids from barrels, apparatus for drawing, J. Cox ... 289,979
Load binder, A. H. Johnston ... 289,109
Lock. See Car door lock. Gun lock. Indicator lock.
Locking nut, G. W. Sampson ... 289,148
Locomotive fuel feeding device, J. W. Cloud ... 289,226
Lubricator. See Engine slide lubricator.
Mangle, A. T. Abbott ... 289,054
Match safe, F. H. Waite ... 289,190
Measure, powder and shot, J. E. Langdon ... 289,111
Measuring fluids, apparatus for, C. H. Bacon ... 289,050
Meat cutting machine, Winnen & Heusch ... 289,081
Mill. See Roller mill.
Millstone driver, Park & Hackett ... 289,303
Mine shaft elevator, M. S. Coleman ... 289,281
Mould. See Pipe mould.
Moulding machine, wood, W. O. Smith ... 289,319
Mouldings, composition for gilt, L. Eberle ... 289,237
Music leaf turner, W. J. Arnold ... 289,966
Nail feeder and nailing machine, J. J. Sullivan ... 289,320
Nail plate feeders, feeding attachment for, S. S. Dean ... 289,992
Nailing machine, W. P. Hopkins ... 289,103
Necktie fastener, O. J. Teriault ... 289,175
Net, fly, A. C. Smith ... 289,085
Ore concentrator, J. Miller ... 289,018
Ore concentrator, Simmons & Henry ... 289,152
Ore separator, B. Hershey ... 289,261
Paint distributer, J. P. Whipple ... 289,048
Paper bag holder, W. H. Ashton ... 289,957
Paper box, H. D. Stimson ... 289,161
Paper, etc., manufacture of, R. Biltz ... 289 212
Parer, apple, A. B. Carter ... 289,974
Pavement, F. W. Bartlett ... 289,970
Pavements, laying, W. McLean ... 289 296
Paving block, impervious, E. B. Martindale ... 289 289
Paving composition, J. G. Ketcham (r) ... 10,414
Photographer's camera plate holder, F. G. & A. C. Sargent ... 289,079
Piano panel protector, Pasmore & McClure ... 289,130
Pipe making, forming moulds and cores in, F. Shickle ... 289,085
Pipe mould, F. Shickle ... 289,084
Pipe moulding machine, F. Shickle ... 289,086
Pipe wrench, C. D. Volkmann ... 289,188
Pipes, laying underground, T. Hibbard ... 289 000
Plane, joiner's, H. B. Beach ... 289,332
Planer, iron, G. E. Brettell (r) ... 10 410
Planter and drill combined, corn, J. Folmer ... 289,342
Planter, corn, R. M. Clark ... 289,222
Plating, nickel, L. F. Dunn ... 289, 97
Pliers, C. F. Winslow ... 289,052
Plow, Cooper & Lemmon (r) ... 10,411
Plow, shovel, W. Eddy ... 289,238
Plow, sulky, J. F. Gehrke ... 288,983
Plow, sulky, W. H. Harrod ... 288,996
Plow, wheel, R. M. Clark ... 289,223
Pole and line holder, clothes, W. H. Martyn, Jr ... 289,290
Portable engines, draught attachment for, M. E. Hershey ... 289,099
Post. See Fence post. Spiral spring post.
Pot. See Flower pot.
Power. See Horse power. Treadle power.
Precious metals by means of the lead bath, apparatus for extracting the, Brown & Gates ... 289,004
Press. See Baling press.
Printing press feed gauge, E. L. Megill ... 289,014
Protector. See Skirt protector.
Puddling furnace, gas burning, J. C. Williams ... 289,201
Pulley rig, dead, H. C. Crowell ... 289,073
Pulley, roller, or friction wheel, J. W. Osborne ... 289,307
Pulley, roller, or wheel, J. W. Osborne ... 289,308
Pulp, machine for assorting wood, F. Voith ... 289,197
Pump, C. L. Fouts ... 289,079
Pump, H. & J. Kelly ... 289,270
Pump, W. S. Marshall ... 289,286
Pump valves, operating steam, C. A. Goyne ... 289,780
Quilting frame, E. H. Taliaferro ... 289,174
Rack. See Wagon rack.
Radiator, steam, S. F. Gold ... 288,993
Rag engine, G. W. Cressman ... 289,235
Rag joining knife, J. A. Fulwiler ... 288,991
Rail for street car tracks, A. J. Moxham ... 289,305
Railway gate, C. A. Ely ... 289,344
Railway rail joint, J. E. Moeller ... 289,296
Railway signals, automatic circuit breaker for, M. W. Long ... 289,000
Rake. See Hay rake.
Rasp and saw, combined, W. S. How ... 289,104
Reamer, expanding, P. Gendron ... 289,248
Register. See Engine register.
Regulator. See Electric machine regulator. Electrical generator regulator. Watch regulator.
Rein, driving, O. F. Coy ... 289,072
Relay or circuit closer, automatic shunt, T. A. B. Putnam ... 289,137
Return ball, C. W. Clark ... 289,221
Ring. See Watch pendant ring.
Roaster. See Coffee roaster.
Rock drill, Naylor & Thornton ... 289,300
Rocket and whip, T. Dockum ... 289,985
Roller. See Clay crushing and grinding roller. Land roller. Pulley roller.
Roller mill, R. J. Good ... 289,083
Rolling car couplings, roll for, J. W. Higgs ... 289,001
Roof coating, J. B. Kelley ... 289,008
Saddle adjuster and fastener, O. W. Cline ... 289,225
Safe door, M. Mosler ... 289,124
Safe, kitchen, J. H. Selby ... 289 311
Saw heating furnace, E. C. Atkins ... 289,958
Sawmill dog, Michener & Varns ... 289,016
Sawing machine, lath, A. Carrier ... 289,219
Scaffolds, support for swinging or pendant, J. T. Churchill ... 289,977
Scarf, neck, I. Noar ... 289,356
Scraper and elevator, T. H. Apple ... 289,331
Scraper, dirt, J. Porteous ... 289,134
Scraper, road, G. D. Matcham ... 289,012
Screw, drive, T. J. Bray ... 289,333
Screwdriver, Allen & Ellrich ... 289,056
Screw machine, F. F. Motley ... 289,125
Screw threads, device for upsetting and restoring, M. Kepler ... 289,271
Screw threads, stock for cutting, O. J. Koniel ... 289,270
Seat. See Infant's seat.
Secondary batteries, apparatus for charging and discharging, Weston & Curtis ... 289,328
Seed huller and separator, cotton, Zerbe & White 289,985
Seed, treating cotton, T. Taylor ... 289,041
Seeding machine, E. D. Mead ... 289,296
Separator. See Ore separator.
Sewer gate, S. Johnson ... 289,107, 289,108
Shaft coupling, A. Wood ... 289,339

Shaft or pole iron for vehicles, R. S. Merrill	289,015
Shingle sawing machine, O. C. Hanson	289,049
Skate, roller, S. Hipkiss	289,009
Skirt protector, C. P. Nicolson	289,030
Skylight bars, window sash bars, and mouldings, machine for the manufacture of, G. Hayes	289,006
Smoke consuming furnace, P. W. Frain	289,045
Snow scraper, R. E. Patten	289,131
Spark arrester, Smock & Dill	289,158
Spindle. See Spinning frame spindle.	
Spinning frame, ring, Schlitt & Warnholtz	289,147
Spinning frame spindle bolster, J. R. Gray	289,094
Spinning frame spindle, ring, J. R. Gray	289,344
Spiral spring post, W. P. Shattuck	289,013
Spring. See Vehicle spring.	
Stamping machine, W. N. Wheless	289,047
Steam boiler, J. E. Leadley	289,282
Steam boiler, J. W. Van Dyke	289,322
Steam engine, compound, M. Brunell	289,065
Steam generator, S. Smith	289,317
Steam generator, J. W. Van Dyke	289,182, 289,183
Steel, compound for the manufacture of, E. Coyle	288,979
Stone for veneers, moulded articles, etc., artificial, W. Matt	289,112
Stone settings, holder for, S. Joel	289,106
Stopper. See Bottle stopper.	
Strands, machine for confining, Doolittle & Stanley	289,077
Straw stacker, A. H. Allison	289,204
Swing and chair, combined, M. Ingersoll	289,367
Switch. See Lamp switch. Telephone switch.	
Switch guard, safety, H. Harmer	289,354
Table. See Game table. Ironing table.	
Tack heads, machine for trimming and shaping, H. R. Packard	289,033
Tapping beer and other barrels, device for, J. F. Davey	289,075
Telegraph, automatic, R. Anderson	289,205
Telegraph, chemical, T. F. Taylor	289,173
Telegraph pole, S. T. Suit	289,320
Telegraph relay, quadruplex, H. C. Nicholson	289,301
Telegraphic relay and repeater, J. A. Maloney	289,295
Telephone, speaking, J. H. Robertson	289,309
Telephone support, J. Trégurtha	289,179, 289,180
Telephone switch, C. T. Loring	289,353
Telephone switch, J. Trégurtha	289,178, 289,321
Thill coupling, H. E. Gamble	288,992
Tidy fastener, W. W. Goodale	288,996
Tire tightener, H. B. May	289,114
Tire, wheel, M. A. Pigott	289,358
Toy kitchen, M. Miller	289,121
Toy money box, W. S. Reed	289,140
Tongue support, McConnell & Taylor	289,013
Trace carrier, D. R. Bize	289,211
Traction engine, J. & H. McLaren	289,294
Transplanting instrument, F. Visscher	289,185, 289,186
Trap. See Animal trap.	
Treadle power, A. W. Bush	289,216
Tricycle, H. K. Shanck	289,151
Trimmer. See Hedge trimmer.	
Truck, car, J. E. Squire	289,160
Truss, L. P. Botsford	288,972
Tub. See Bath and wash tub.	
Umbrella, J. N. Colby	289,229
Umbrella and cane, combined, J. N. Colby	289,230
Valve, air, J. S. Walker *et al.*	289,192
Valve, steam cylinder relief, W. B. Coulter	289,071
Valve, water protected, J. E. Leadley	289,277
Vehicle spring, J. Carroll	289,067
Vehicle spring, W. F. Sweet	289,361
Vehicle spring, J. W. Wetmore	289,049
Velocipede, railway, G. W. Miller	289,017
Veneer, F. Koskul	289,005
Wagon rack, C. Cotton	289,234
Watch, E. Kuhn	289,332
Watch case, E. C. Fitch	289,340
Watch pendant ring, R. B. Richmond	289,141
Watch regulator, C. Ruttmann	289,359
Water closet, W. Bishop	289,210
Water gauge, G. P. Harmon	289,255
Water heater, J. B. Webster	289,194
Water supply, combined railway and cattle, C. P. Sykes	289,040
Water wheel, J. M. Nilson	289,021
Water wheel, L. B. Swartwout	289,169
Well drilling apparatus, E. Catlin	288,975
Well drilling machine, T. J. Hathaway	289,257
Wheel. See Car wheel. Fifth wheel. Harvester wheel. Water wheel.	
Wheel or pulley, A. R. Byrkett	289,335
Whip holder, J. J. Rose	289,310
Window drip pan, W. S. Taylor	289,174
Work benches, device for fastening saw clamps, etc., to, A. S. Coburn	289,227
Wrench. See Pipe wrench.	
Wrench, J. H. Coes	289,069
Wrench, J. Houlehan	289,347
Yoke, neck, J. W. Harris	289,256
Zylonite, etc., apparatus for polishing sheets of, J. B. Edson	289,239
Zylonite, etc., for collars, cuffs, etc., forming and finishing fabrics coated with, J. B. Edson	289,242
Zylonite, forming and finishing surfaces coated with, J. B. Edson	289,240
Zylonite to resemble pebble, goat, French calf, and alligator leather, treating material with, J. B. Edson	289,238

DESIGNS.

Apron, baby's creeping, M. Turner	14,456
Basque, lady's, L. Tully	14,450
Blouse, boy's, J. Q. Reed	14,458
Bracelet, R. H. Ahn	14,448
Carpet, A. Fisher	14,440
Coat, child's, M. Turner	14,455
Costume, child's, C. O'Hara	14,448
Costume, girl's, L. Tully	14,457
Costume, girl's, M. Turner	14,458
Costume, lady's, C. O'Hara	14,447
Costume, lady's, J. Q. Reed	14,452
Electrical conductor, C. H. Pond	14,451
Fence, wire, G. Hunziker	14,442
Fork, H. C. Hart	14,441
Glassware, W. Leighton	14,443
Jacket, lady's double-breasted, M. Turner	14,459
Lamp chimney, G. A. Macbeth	14,445, 14,446
Skirt, lady's walking, C. O'Hara	14,449
Soap, cake or bar, A. Lucy	14,444
Toilet ware or vessel, J. P. Eustis	14,439
Wrap, lady's, J. Q. Reed	14,454
Wrap, lady's, M. Turner	14,461

TRADE MARKS.

Boxed cans for oils, varnishes, spirits of turpentine, and other liquids, C. Burnham & Co	10,748
Caps, cartridges, primers, shells, and wads, pistol and gun, Union Metallic Cartridge Company	10,746
Cordial, A. Legrand	10,749 to 10,751
Corsets, J. Bowers	10,744
Cosmetics, G. L. Burnside	10,740
Medical capsules, J. Ferré	10,742
Medical preparations for the cure of diseases of the genital organs, J. Ferré	10,743
Medicine for the treatment of the diseases of the genital organs, J. Ferré	10,741
Milk, condensed or concentrated, H. Y. Canfield	10,746
Ribbons, taffeta, Oberteuffer, Abegg & Daeniker	10,738
Ribbons, velvet, E. Mommer	10,747
Rubber goods and boots and shoes, cement for, Mulford, Cary & Conklin	10,737
Tobacco, snuff, and cigarettes, smoking and chewing, H. Wilkens & Co	10,739

A printed copy of the specification and drawing of any patent in the foregoing list, also of any patent issued since 1866, will be furnished from this office for 25 cents. In ordering please state the number and date of the patent desired, and remit to Munn & Co., 261 Broadway, New York. We also furnish copies of patents granted prior to 1866; but at increased cost, as the specifications, not being printed, must be copied by hand.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, at a cost of $40 each. For full instructions address Munn & Co., 261 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.
(About eight words to a line.)

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

BARNES'

Patent Foot and Steam Power Machinery. Complete outfits for Actual Work-shop Business. Lathes for Wood or Metal. Circular Saws, Scroll Saws, Formers, Mortisers, Tenoners, etc., etc. Machines on trial if desired. Descriptive Catalogue and Price List Free.

W. F. & JOHN BARNES,
No. 1999 Main St. Rockford, Ill.

WOOD WORKING TOOLS
PATTERN SHOPS FITTED THROUGHOUT
SEND FOR CATALOGUE 119 MILL ST.
F. H. CLEMENT, ROCHESTER, N.Y.

To Electricians, Water Boards, Manufacturers, and others using Steam, Water, Air, or Oil under Pressure.

Time and Pressure Recording Gauge and Alarm for Offices.

Time, Speed, and Pressure Recording Gauge and Alarm for Factories, etc.

Edson's inventions shown in these cuts are Specialties. They were adopted and used at the Centennial Exposition as Standards for Expert Testing for steam boilers, steam gauges, etc., and they are guaranteed for Accuracy and Durability. They are alike adapted for Air, Oil, Steam, or Water Pressure.

One year's supply of daily Charts, printed and ruled to special scale of each instrument, also Shelf and Brackets, sent free of extra charge with the gauges.

Full instructions for unpacking, setting up, and running always sent with instrument.

For pamphlets and prices address

M. B. EDSON,
77 Liberty St., New York.

ICE AND ICE HOUSES—HOW TO MAKE ice ponds; amount of ice required, etc., and full directions for building ice-house, with illustrated plan. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 355. Price 10 cents. To be had at this office and of all newsdealers.



Was awarded the Medal of superiority over all competitors at the Semi-Centennial Fair of the American Institute in New York.

It is **small**, weighing but 6 pounds.—It costs only **$40**, in portable case, with handle.—It is **simple** to use, having but one key.—It has but **few parts**, and is not liable to get out of order.—It **requires no Ink Ribbon.**—It **prints from face** of the type, always neat and perfect.—It **prints Cards, Envelopes,** or Paper of any size or kind without adjustment.—The **Printing lies before the Operator like writing.**—The **type forms,** representing **all styles of type,** are interchangeable, and cost but $1 each.

HALL TYPE-WRITER CO.,
853 BROADWAY, NEW YORK.

Syracuse Malleable Iron Works

$2000 will buy a State Right for a Useful Patent. Big money in it. Address R. A. McCAULEY, 31 Lexington Street, Baltimore, Md.

ICE-BOAT WHIFF. FULL WORKING drawings and description, with dimensions of the model Ice-yacht Whiff, the fastest yacht in the world. Exhibited at the Centennial, by Irving Grinnell. With fourteen illustrations. SUPPLEMENT 63. Price 10 cents.

THE BALLOU M'F'G CO.,
Makers of Fine Machinery, Correct Leading Screws,
And Instruments of Precision; Astronomical Clocks, Mathematical and Scientific Apparatus, etc.
HARTFORD, CONN.

Woodworking Machinery.
For Planing Mills, Furniture and Chair Factories, Car and Agricultural Works, Carriage and Buggy Shops, and General Wood Workers. Manufact'd by
Cordesman & Egan Co.,
Cincinnati, O., U. S. A.
Full assortment of Perin Saw Blades.

WANTED—The right to manufacture horse power royalty. Feed Mills and other inventions on MACHINE WORKS, Unadilla, N. Y.

100 HORSE POWER

ENGINE and BOILERS, nearly as good as new, with some woodworking machinery, for sale at a bargain to close an estate.
Address
A. G. WILCOX, Executor,
Minneapolis, Minn.

The Noteman Rotary Engine Co.,
Agency, 86 John St., N. Y. TOLEDO, OHIO.
The best engine for all purposes in the market.
Economy, Durability, High Speed, Low Price.
In proof of which send for Scientific Tests just issued by Prof. Robert H. Thurston, of Stevens Institute, Hoboken; also for circulars with prices and commendatory letters. The exclusive right to manufacture these engines for the Eastern and Middle States for sale.
Address D. E. SALTONSTALL, Prest.
For two weeks at 86 John Street, New York; Afterward, Toledo, Ohio.

Wiley & Russell Mfg. Co., Greenfield, Mass.

UNIVERSAL MILL.
The Newell
Pulverizes everything—hard, soft, gummy, etc. The best Clay Grinder and the best Cotton Seed Huller in the world.
Portable Steam Engines, Stationary Engines, Horizontal and Upright Boilers, all sizes, on hand for immediate delivery.
10 Barclay St., N. Y. City.

DEAFENING
FIRE —AND— VERMIN
PROOF
Sample and Circular Free by mail.
U. S. MINERAL WOOL CO., 22 Courtlandt St., N. Y.

PATENTS.

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had *thirty-eight years' experience*, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
261 Broadway, New York.

BRANCH OFFICE.—Corner of F and 7th Streets, Washington, D. C.

Financial.

Preston, Kean & Co.
Bankers.
CHICAGO, ILL.
Receive Deposit Accounts.
Issue Circular Letters of Credit available in all parts of the world.
Foreign Exchange bought and sold.
INVESTMENTS.
We have constantly on hand a line of choice State, County, City, and School Bonds, which we can sell at attractive rates.
Full information furnished on application.
We also deal in land warrants and land scrip.

POST, WALES & CO.,
72 Broadway, New York,
STOCKS & BONDS
OF EVERY DESCRIPTION.
BOUGHT AND SOLD AT BEST RATES.
Investment Securities a Specialty.

AUGUST BELMONT & CO.,
BANKERS,
Nos. 19 and 21 Nassau Street, New York.
Issue Travelers' Credits, available in all parts of the world, through the
MESSRS. DE ROTHSCHILD,
and their Correspondents.
Also Commercial Credits and Transfers of Money on California, Europe, and Havana.

Lincoln Safe Deposit Co.
AND STORAGE WAREHOUSE,
32 TO 38 EAST 42d St.
(OPPOSITE GRAND CENTRAL DEPOT).
BUILDING FIREPROOF THROUGHOUT.
Burglarproof Boxes and Safes Rented at from $10 to $300 per year.
THE BEST OF FACILITIES FOR GENERAL STORAGE.
TRUNK STORAGE A SPECIALTY.
BUILDING APPROVED BY FIRE COMMISSIONERS AND INSPECTOR OF BUILDINGS.
THOS. L. JAMES, President.

Insurance.

Something New in Life Insurance!

The **ÆTNA LIFE INSURANCE COMPANY,** of Hartford, Conn., has introduced and copyrighted a New Plan of Insurance, which gives more privileges to the Insured, and promises to yield a larger return (considering the benefits conferred and the premiums paid) than any other plan or company can give. The premium charged is very low—it approximates near the common life rate. It is an Endowment Policy payable at the end of the specified time, or it can be converted into cash at stated periods.

At the time cash values are payable, the Company pays to the Insured the Accumulated Surplus. With its method of dividing profits the Accumulations are likely to be large. Send for a circular describing the plan.

The **ÆTNA LIFE** also issues policies upon all plans in general use, with Annual Cash Dividends. Also Non-Participating and Renewable Term Policies.

The **ÆTNA LIFE** has about twenty-nine millions of securely invested assets. It has a surplus of about six millions over its liabilities. Its business is economically and successfully managed. It issues Indisputable Policies. It makes no war with claimants, but reserves the right to deal with fraud *during the lifetime of the insured.*

AGENTS WANTED at all points where the Company is not at present represented.

Address the
ÆTNA LIFE INSURANCE CO.,
HARTFORD, CONN.

GIRARD
FIRE INSURANCE COMPANY.
OFFICE:
N. E. Cor. CHESTNUT and SEVENTH STS.
No. 420 WALNUT STREET,

ASSETS, July 1, 1883	$1,216,073 04
SURPLUS as regards Policy holders	849,161 57
NET SURPLUS over all Liabilities including Capital Stock	594,161 57

ALFRED S. GILLETT, President.
JAMES B. ALVORD, Vice Pres. and Treas.
EDWIN F. MERRILL, Secretary.
JULIUS B. ALLEN, Asst. Secretary.

ROYAL FIRE INSURANCE COMPANY
Of Liverpool, England.
Established 1845.
HEAD OFFICE METROPOLITAN DISTRICT,
No. 50 WALL STREET, NEW YORK,
TRUSTEES:
BEN. B. SHERMAN, ROYAL PHELPS,
JACOB D. VERMILYE.
E. F. BEDDALL, Manager.
WM. W. HENSHAW, Ass't Manager.

Williamsburg City Fire Insurance Co.
ORGANIZED 1853.
Corner Broadway and First Street, Brooklyn, E. D.; 26 Court St., Broadway, W. D.; 208 and 210 Broadway, N. Y.

CASH CAPITAL	$250,000 00
Reserved for Reinsurance, and all other liabilities	323,818 83
NET SURPLUS	300,186 58
ASSETS JANUARY 1, 1883	$1,074,005 41

EDMUND DRIGGS, Pres't.
N. W. MESEROLE, Sec'y.

BAIRD'S BOOKS
FOR
PRACTICAL MEN

Our new and enlarged CATALOGUE OF PRACTICAL AND SCIENTIFIC BOOKS, 96 pages, 8vo, a CATALOGUE OF BOOKS ON STEAM AND THE STEAM ENGINE, MECHANICS, MACHINERY, AND DYNAMICAL ENGINEERING, and a CATALOGUE OF BOOKS ON CIVIL ENGINEERING, BRIDGE BUILDING, STRENGTH OF MATERIALS, RAILROAD CONSTRUCTION, etc., a CATALOGUE OF A MISCELLANEOUS COLLECTION OF PRACTICAL AND SCIENTIFIC BOOKS, a List of Books on ELECTRO-METALLURGY, ETC., and other Catalogues, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.

HENRY CAREY BAIRD & CO.,
Industrial Publishers, Booksellers, and Importers,
810 WALNUT STREET, PHILADELPHIA, PA.

HOUSES BUILT
WITH LITTLE OR NO MONEY!

650 illustrations and exhaustive text in the great work "HOW TO BUILD, FURNISH AND DECORATE," just published. Special offer to first purchasers. "A book worth ten times the price."—*N. Y. Sun.* "A book worth ten times the price."—*N. Y. Sun.* **AGENTS.** Extraordinary inducements to. An entirely new feature: *Double profits.* Large specimens and particulars free to callers; sent by mail for 4c. in stamps. Co-operative Building Plan Association. 24 BEEKMAN ST., NEW YORK.

THE
POPULAR SCIENCE MONTHLY.
Conducted by E. L. & W. J. Youmans.

THE POPULAR SCIENCE MONTHLY was established a dozen years ago to bring before the general public the results of scientific thought on many large and important questions which could find no expression in the current periodicals. Scientific inquiry was penetrating many new fields, extending important knowledge, and profoundly affecting opinion upon numberless questions of speculative and practical interest. It was the policy of this magazine at the outset, and has been constantly adhered to since, to obtain the ablest statements from the most distinguished scientific men of all countries in their bearing upon the higher problems of investigation. Leaving the dry and technical details of science, which are of chief concern to specialists, to the journals devoted to them, THE POPULAR SCIENCE MONTHLY has dealt with those more general and practical subjects which are of the greatest interest and importance to the people at large.

Science is the great agency of improvement in this age, private and public, individual, social, professional, and industrial. In its irresistible progress it touches everywhere, and affects everybody. It gives law to the material interests of the community, and modifies its ideas, opinions, and beliefs, so that all have an interest in being informed of its advancement. Those, therefore, who desire to know what is going on in the world of thought in these stirring times, when new knowledge is rapidly extending, and old errors are giving way, will find that they can keep informed only by subscribing for THE POPULAR SCIENCE MONTHLY.

TERMS: $5.00 per annum.

Volume XXIV. begins with the November number. Subscriptions may begin at any time.

D. APPLETON & CO., Publishers,
1, 3, and 5 Bond Street, New York.

FREE TO F. A. M. Graphic Colored Engraving of an Ancient Initiation Scene from a newly discovered Egyptian Tablet; also, the large new Illustrated Catalogue of Masonic books and goods, with bottom prices; also, an offer of very lucrative business to F. A. M. REDDING & CO.
Masonic Publishers and Manufacturers, 731 Broadway, New York.

SENT FREE FOWLER & WELLS will send a back number of their Phrenological Journal and Science of Health with Premium List and Catalogue of Books on Phrenology, Physiognomy, Health, Mesmerism, etc., Free. Address on postal F. & W., 755 Broadway, New York.

50 Elegant Imp. Chromo Cards, name in new script type, only 10c., 18 pks. $1, or 10 pks. for $1 and choice free of handsome gold ring, plain, chased, fancy, or stone setting, or tortoise-shell knife. Snow & Co., Meriden, Ct.

Neatest, Best, and sells for **10** Cents. My agents are making $5 to $20 per day. Descriptive Circulars, Terms to Agents, &c., Free. Sample 10c. Box 635. GEO. W. JOPSON, Mfr., Meriden, Conn.

$5 to $20 per day at home. Samples worth $5 free. Address STINSON & Co., Portland, Me.

INDIAN Relics, Agate Goods, Curiosities, Specimens. Send stamp for Catalogue to H. H. Tammen & Co., No. 9 Windsor blk., Denver, Colo.

CONSUMPTION.
I have a positive remedy for the above disease; by its use thousands of cases of the worst kind and of long standing have been cured. Indeed, so strong is my faith in its efficacy, that I will send TWO BOTTLES FREE, together with a VALUABLE TREATISE on this disease, to any sufferer. Give Express & P. O. address. DR. T. A. SLOCUM, 181 Pearl St., N. Y.

OPIUM
Habit easily cured with CHLORIDE OF GOLD
LESLIE E. KEELEY, M.D., SURGEON, C. & A. R. R.
DWIGHT, Illinois.

RUPTURE
cured without an operation or the injury trusses inflict by Dr. J. A. SHERMAN'S method. Office, 251 Broadway, New York. His book, with Photographic likenesses of bad cases, before and after cure, mailed for 10c.

266th EDITION. PRICE ONLY $1
BY MAIL, POSTPAID.

KNOW THYSELF.
A Great Medical Work on Manhood,

Exhausted Vitality, Nervous and Physical Debility, Premature Decline in man, Errors of Youth, and the untold miseries resulting from indiscretions or excesses. A book for every man, young, middle-aged, and old. It contains 125 prescriptions for all acute and chronic diseases, each one of which is invaluable. So found by the author, whose experience for 23 years is such as probably never before fell to the lot of any physician. 300 pages, bound in beautiful French muslin, embossed covers, full gilt, guaranteed to be a finer work in every sense—mechanical, literary, and professional—than any other work sold in this country for $2.50, or the money will be refunded in every instance. Price only $1.00 by mail, postpaid. Illustrative sample, 6 cents. Send now. Gold medal awarded the author by the National Medical Association, to the officers of which he refers.

This book should be read by the young for instruction and by the afflicted for relief. It will benefit all.—*London Lancet.*

There is no member of society to whom this book will not be useful, whether youth, parent, guardian, instructor, or clergyman.—*Argonaut.*

Address the Peabody Medical Institute, or Dr. W. H. Parker, No. 4 Bulfinch Street, Boston, Mass., who may be consulted on all diseases requiring skill and experience. Chronic and obstinate diseases that have baffled the skill of all other physicians a specialty. Such treated successfully HEAL THYSELF without an instance of failure

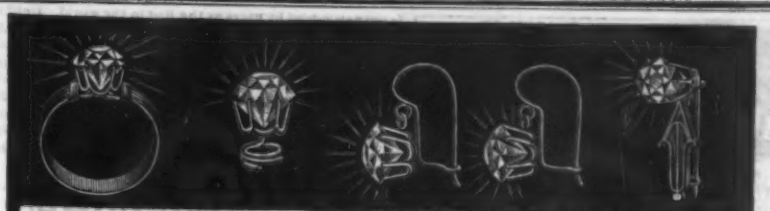

BRILLIANT FRENCH DIAMONDS, SOLID GOLD, ONLY $1.00.

Only a short time ago we purchased of a large **bankrupt importing house** their entire stock of **IMITATION DIAMOND JEWELRY** at less than **one-half the cost of importation.** We have decided to offer the entire lot of RINGS, STUDS, PINS and EAR JEWELS at a price that must close them out before the holidays.—**BEAUTIFUL GOODS.** There are no goods made that can equal these in brilliancy and durability. We guarantee every article **SOLID GOLD, will wear a lifetime,** and we defy any one but an expert to tell these goods from **GENUINE DIAMONDS.** The lustre of these goods never grows dim, and if you are not fully satisfied with your purchase we will refund your money every time. With each order we send our Mammoth Catalogue of **OVER ONE THOUSAND STYLES OF JEWELRY.** We believe you will be so pleased with above goods, that you will always buy Jewelry of us. **ORDER AT ONCE. Remember, these goods are solid gold, not plated.** Your choice for **$1.00**, except the Ear Jewels, for which we have, for choice **$1.50** for the pair. Send money by ordinary or registered letter or postal note at our risk. We sell six pieces for **$5.00.** Address all orders to **RIDEOUT & CO., 12 Barclay Street, New York.**

AMERICAN STEAM GAUGE CO.,
Original Steam Gauge Co.

Bus. Estab. in 1851. Incorporated in 1854.
Sole Manufacturers of the
IMPROVED THOMPSON INDICATOR
PLANIMETER AND PANTOGRAPH.
36 Chardon St., BOSTON, MASS.

Send for New Illustrated Price List and name this paper.
J. C. BLAISDELL, Prest.
E. BURT PHILLIPS, Treas. H. K. MOORE, Supt.

Clark's Noiseless Rubber Wheels. Absolutely prevent splintering and wearing of floors caused by use of Iron Wheels. Adapted for Trucks, Boxes, Baskets, Tables, and work of every kind in Mills, Warehouses, Stores, etc. Catalogue free.
GEO. P. CLARK, Windsor Locks, Ct.

ICE-BOATS — THEIR CONSTRUCTION and management. With working drawings, details and directions in full. Four engravings, showing mode of construction. Views of the two fastest ice-sailing boats used on the Hudson river in winter. By H. A. Hornfull, M.E. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, 1. The same number also contains the rules and regulations for the formation of ice-boat clubs, the sailing and management of ice-boats. Price 10 cents.

COE BRASS MFG. CO. TORRINGTON, CONN. BRASS AND COPPER IN SHEETS. MATERIALS FOR METALLIC AMMUNITION A SPECIALTY. WIRE AND BLANKS

KEMP'S MANURE SPREADER,
Pulverizer and Cart Combined.

Plantation Spreader for distributing Cottonseed, etc. in drills, **Greatest Agricultural Invention** of the age. Saves 50 per cent of labor, and economizes manure. Spreads evenly all kinds of manure, cottonseed, etc. broadcast or in drills, in one-tenth time required by hand. Illustrated catalogue free.
KEMP & BURPEE M'F'G CO., Syracuse, N. Y.

M'F'G OPTICIANS.
Exclusively Perfected
OPERA, FIELD & MARINE GLASSES,
TELESCOPES, MICROSCOPES, BAROMETERS, THERMOMETERS
Magic Lanterns, "Anokato," etc.
J. PRENTICE & SON 6 B'WAY, N.Y. EST'D 1842
Send at once for LIST OF USEFUL HOLIDAY GIFTS—gratis.

HOW TO TAKE PICTURES



Send 25 cents for full information for use of the NEW Model CAMERA!

ONLY 25c.

with which anyone having no knowledge whatever of photography may make good pictures

Cameras and Outfits $10 and upward, on sale at Book-Sellers and Opticians everywhere. Send for Catalogue to THE ROCHESTER OPTICAL CO.
A most acceptable Holiday Gift. Box A. ROCHESTER, N. Y.

THE DUPLEX INJECTOR.
The constantly increasing demand for this Boiler Feeder proves its superiority over other machines now in use. Send for illustrated circular and price list.
Manufactured by JAMES JENKS, Detroit, Mich.

SEND TO LONDON, BERRY & ORTON PHILA PA FOR
THE BEST BAND SAW BLADE



WITHERBY, RUGG & RICHARDSON, Manufacturers of Patent Wood Working Machinery of every description. Facilities unsurpassed. Shop formerly occupied by R. Ball & Co., Worcester, Mass. Send for Catalogue.

VELOCITY OF ICE BOATS. A COLLECtion of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 214. Price 10 cents. To be had at this office and from all newsdealers.

ARTESIAN WELL
DRILLING, WELL BORING AND MINERAL PROSPECTING MACHINERY. Portable, low priced, worked by horse, steam or man power. Will procure an abundance of water in earth or rock, anywhere. Send 3c. stamp for catalogue, also names of those wanting water. C. D. Pierce Well Co., 29 Rose Street, New York.

New York

'Singer' Model Sewing Machine on $15
A Corder, Ruffler, Tucker, Five Hemmers, Binder, Thread Cutter, Needles, Oil and full outfit with each.—**Guaranteed to be perfect. Warranted 5 years.** Don't pay double for machines no better, when you can try these before you pay a cent. All late improvements. Runs light with little noise. Handsome and durable. Circulars with hundreds of testimonials free.
GEO. PAYNE & CO, 47 Third Ave., Chicago, Ill.

PORTABLE FORGES—Largest manufactory in the WORLD.
EMPIRE PORTABLE FORGE CO., Cohoes, N. Y.

PATENT
COLD ROLLED SHAFTING.

The fact that this shafting has 75 per cent. greater strength, a finer finish, and is truer to gauge, than any other in use renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS' PAT. COUPLING, and furnish Pulleys, Hangers, etc., of the most approved styles. Price list mailed on application to JONES & LAUGHLINS, Limited,
Try Street, 2d and 3d Avenues, Pittsburg, Pa.
Corner Lake and Canal Sts., Chicago, Ill.
Stocks of this shafting in store and for sale by
FULLER, DANA & FITZ, Boston, Mass.
Geo. Place Machinery Agency, 121 Chambers St., N. Y.

Gas Engines, ½ & 1 H. P., Now Ready.



For Power or For Pumping

GAS ENGINES,
Simple, Substantial, Safe, Economical.

Half horse power will pump 500 gallons of water 100 feet high per hour with 25 feet of gas.
POWER DETERMINED BY ACTUAL TEST.
Call and see them, or for circulars and prices address
THE CONTINENTAL GAS ENGINE CO.,
No. 231 BROADWAY, NEW YORK.

Leffel Water Wheels,
With Important Improvements.

11,000 IN SUCCESSFUL OPERATION.
FINE NEW PAMPHLET FOR 1883
Sent free to those interested.
JAMES LEFFEL & CO.,
Springfield, Ohio.
110 Liberty St., N. Y. City.

ROCK BREAKERS AND ORE CRUSHERS.

We manufacture and supply at short notice and lowest rates, Stone and Ore Crushers containing the invention described in Letters Patent, issued to Eli W. Blake, June 15th, 1858, together with NEW AND VALUABLE IMPROVEMENTS, for which Letters Patent were granted May 11th and July 20th, 1880, to Mr. S. L. Marsden. All Crushers supplied by us are constructed under the superintendence of Mr. Marsden, who, for the past fifteen years, has been connected with the manufacture of Blake Crushers in this country and England.
FARREL FOUNDRY AND MACHINE CO., Manufrs., Ansonia, Conn.
COPELAND & BACON, Agents, New York.



CONTINENTAL WORKS, BROOKLYN, N. Y.
DUC'S MECHANICAL ATOMIZER OR PULVERIZER,
For reducing to an impalpable powder all kinds of hard and brittle substances, such as QUARTZ, EMERY, CORUNDUM, GOLD AND SILVER ORES, BARYTES, COAL, PHOSPHATE ROCK, etc. It is simple and not liable to get out of order, revolving shell being constructed of Siemens-Martin steel, and all parts mechanical in design and of first-class construction. Weight, 5,500 lb.; heaviest piece, 1,500 lb. It will pulverize **7 TO 10 TONS IN TEN HOURS** with 30 H. P. For circulars and full particulars, apply to or address
THOS. F. ROWLAND, Sole Manuf'r, Brooklyn, N. Y.

ROOT'S NEW IRON BLOWER

POSITIVE BLAST.
IRON REVOLVERS, PERFECTLY BALANCED.
Has Fewer Parts than any other Blower.
P. H. & F. M. ROOTS, Manufacturers,
CONNERSVILLE, IND.
B. S. TOWNSEND, Gen. Agt., 26 Cortland St., 9 Dey St.
COOKE & CO., Selling Agts., 22 Cortland Street.
JAS. BROOS & CO., Selling Agts. 9 Dey Street.
NEW YORK.
SEND FOR PRICED CATALOGUE.

$72 A WEEK, $12 a day at home easily made. Costly Outfit free. Address TRUE & Co., Augusta, Me.

THE
$1. ELECTRIC ENGINE
AND GYROSCOPE.



The Most Wonderful Miniature Machine ever produced. This is a perfect **Electric Engine** with cell battery and motor complete all ready to run, and it is one of the most interesting pieces of machinery imaginable. With each one goes enough chemicals for a month's use. A boy of ten years can understand the directions and run it. *There is absolutely no danger* the chemical being *harmless.* Fill the cell half full of water, put in the stated quantity of the chemical powder, and in a moment the engine is running, and when the gyroscopic discs are attached beautiful forms and colors are produced. This instrument will entertain a household all winter, and do much to render the science of electric power understood. These machines are imported, and could not be made in this country for the price. Every one warranted perfect. Price **$1.00,** Sent by mail, 10 cents extra. **THE HARRACH ORGANNA CO., 809 Filbert St., Philadelphia, Pa.** *Mammoth Wonder Catalogue sent free.*

MALLEABLE AND FINE GRAY IRON AND STEEL CASTINGS FROM SPECIAL PATTERN
THOMAS DEVLIN & CO.'S FINE TINNING, JAPANNING AND LEHIGH AVE. & AMERICAN ST. PHILA.

$66 a week in your own town. Terms and $5 outfit free. Address H. HALLETT & Co., Portland, Me.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, 59. Price 10 cents. To be had at this office and of all newsdealers.

VOLNEY W. MASON & CO.,
FRICTION PULLEYS, CLUTCHES, and ELEVATORS
PROVIDENCE, R. I.

The Seibert Cylinder Oil Cup Co.,

Manufacturers of Oil Cups for Locomotive, Marine and Stationary Engine Cylinders, under the Seibert and Gates Patents, with Sight Feed.

TAKE NOTICE.

The "Sight Feed" is owned exclusively by this company. See Judge Lowell's decision in the United States Circuit Court, District of Massachusetts, Feb. 28, '82. All parties, except those duly licensed by us, are hereby notified to desist the use, manufacture, or sale of Infringing Cups, as we shall vigorously pursue all infringers.

The Seibert Cylinder Oil Cup Co.,
53 Oliver Street, Boston, Mass.

WATCHMAKERS.
Before buying, see the Whitcomb Lathe and the Webster Foot Wheel, made by the AMERICAN WATCH TOOL CO., Waltham, Mass.

FRICTION CLUTCH
Pulleys and Cut-off Couplings.
JAS. HUNTER & SON, North Adams, Mass.

ICE-HOUSE AND REFRIGERATOR. Directions and Dimensions for construction, with one illustration of cold house for preserving fruit from season to season. The air is kept dry and pure throughout the year at a temperature of from 34° to 38°. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 116. Price 10 cents. To be had at this office and of all newsdealers.

Steel Castings

From ¼ to 15,000 lb. weight, true to pattern, of unequaled strength, toughness, and durability. 20,000 Crank Shafts and 15,000 Gear Wheels of this steel now running prove its superiority over other Steel Castings. Send for circular and price list.
CHESTER STEEL CASTINGS CO.,
407 Library St., Philadelphia, Pa.

PERFECT
NEWSPAPER FILE.

The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN," in gilt. Necessary for every one who wishes to preserve the paper.
Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.
(About eight words to a line.)

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.



This Saw is very much harder than a file, and will cut Iron and Steel almost as readily as wood. One saw will cut off a bar of half-inch round iron eighty times, or a bar of untempered steel forty times. It cuts ten times as fast as a file, and at one-tenth the cost. As it cuts everything, it will do most of the sawing required about a house, shop or farm.

The Frame is made of Steel, polished and Nickel Plated, and will face the saw in four different directions. Frame and 12 Saws sent by mail on receipt of $1.50. Hardware dealers will furnish them at the same price. All genuine goods are marked with a Star, and bear our name—

Millers Falls Co.,
74 Chambers St., New York.



ELLIOTT'S PAT. WATCH OILER.
Send $1 for sample and prices by mail.
W. S. HILL, 21 Stanhope St., Boston, Mass.

NEW HAVEN MANUFACTURING CO.
NEW HAVEN, CONN.,
MANUFACTURERS OF IRON WORKING
MACHINE TOOLS
Lathes, Planers, Drills, Shapers, etc.
ILLUSTRATED CATALOGUE ON APPLICATION.

COLUMBIA BICYCLES AND TRICYCLES.
New Illustrated (36 page) Catalogue, giving full description of these machines, sent for 3 cent stamp.
THE POPE M'F'G CO.,
597 Washington St., Boston, Mass.

BOGARDUS' PATENT UNIVERSAL ECCENTRIC MILLS—For grinding Bones, Ores, Sand, Old Crucibles, Fire Clay Guanos, Oil Cake, Feed, Corn, Corn and Cob, Tobacco, Snuff, Sugar, Salts, Roots, Spices, Coffee, Cocoanut, Flaxseed, Asbestos, Mica, etc., and whatever cannot be ground by other mills. Also for Paints, Printers' Inks, Paste Blacking, etc. JOHN W. THOMSON, successor to JAMES BOGARDUS, corner of White and Elm Sts., New York.

THE BEST STEAM PUMP.
Van Duzen's Patent Steam Pump.
Incomparable in cheapness and efficiency. Needs no care or skill; cannot get out of order; has no moving parts.
A Superior Fire Pump.
Instantaneous and powerful, ever ready. Available, wherever steam pressure can be had, for pumping any kind of liquid (hot, cold, sandy, impure, etc.). We make ten sizes, prices from $7 to $75. Capacities from 100 to 20,000 gallons per hour. State for what purpose wanted and send for Catalogue of "Pumps." Van Duzen & Tift, Cincinnati, O.

The "MONITOR."
A NEW LIFTING AND NON-LIFTING INJECTOR.



Best Boiler Feeder in the world.
Greatest Range yet obtained. Does not Break under Sudden Changes of Steam Pressure.
Also Patent
EJECTORS
OR
Water Elevators.
For Conveying Water and Liquid.
Patent Oilers, Lubricators, etc.
NATHAN & DREYFUS,
Send for catalogue. 92 & 94 Liberty St., New York.

Pyrometers. For showing heat of Ovens, Hot Blast Pipes, Boiler Flues, Superheated Steam, Oil Stills, etc.
HENRY W. BULKLEY, Sole Manufacturer,
149 Broadway, New York.

H.W. JOHNS' ASBESTOS
ASBESTOS ROPE PACKING,
ASBESTOS WICK PACKING,
ASBESTOS FLAT PACKING,
ASBESTOS SHEATHINGS,
ASBESTOS GASKETS,
ASBESTOS BUILDING FELT.
Made of strictly pure Asbestos.
H. W. JOHNS M'F'G CO.,
87 Maiden Lane, New York,
Sole Manufacturers of H. W. Johns' Genuine
ASBESTOS LIQUID PAINTS, ROOF PAINTS, ROOFING, STEAM PIPE AND BOILER COVERINGS, FIREPROOF COATINGS, CEMENTS, ETC.
Descriptive price lists and samples free.

NEW YORK COAL TAR CHEMICAL CO.
19 WARREN St N.Y.

WM. A. HARRIS,
Providence, R. I. (Park St.), Six minutes' walk West from station.
Original and Only Builder of the
HARRIS-CORLISS ENGINE,
With Harris' Pat. Improvements, from 10 to 1,000 H. P.
Send for copy Engineer's and Steam User's Manual. By J. W. Hill, M.E. Price $1.25.

Is acknowledged by users as the *Best* in the world. Unlike all other Packings, the **Jenkins Standard Packing** can be made any thickness desired in a joint by placing two or as many thicknesses together as desired, and following up joint it vulcanizes in place and becomes a metal of itself (it is frequently called Jenkins Metal) and will last for years, as it does not rot or burn out. Avoid all imitations. The GENUINE has stamped on every sheet "JENKINS STANDARD PACKING," and is for sale by the trade generally. ☞ Send for Price List "R."

NEW YORK BELTING AND PACKING COMP'Y.
The Oldest and Largest Manufacturers of the Original
SOLID VULCANITE EMERY WHEELS.

Emery Wheel.

All other kinds Imitations and Inferior. Our name is stamped in full upon all our standard BELTING, PACKING, and HOSE. Address
JOHN H. CHEEVER, Treas. **NEW YORK BELTING AND PACKING CO.,**
Nos. 13 & 15 Park Row, opp. Astor House, New York.

EVAPORATING FRUIT

American Fruit Drier.

Treatise on improved methods SENT FREE. Wonderful results. Tables of Yields, Prices, Profits, and General Statistics. Address
AMERICAN MANUF'G CO.,
Waynesboro, Pa.

WHO NEEDS MONEY?
I have a first-class manufacturing building, equipped with a one hundred and fifty horse power engine, boilers, shafting, benches, etc., suitable for almost any kind of manufacturing purposes, and money to help any person who has an article to manufacture of intrinsic merit. For further particulars, write to me, stating what you have, etc.
W. G. WILSON, Chicago, Ill.



ERICSSON'S New Caloric Pumping Engine,
FOR
Dwellings & Country Seats
Simplest! Cheapest! Economical! Absolutely Safe!
Delamater Iron Works,
C. H. Delamater & Co.,
Proprietors,
16 Cortlandt Street,
New York, U. S. A.

LYON & HEALY
State & Monroe Sts., Chicago.
Will send prepaid to any address their
BAND CATALOGUE,
for 1883, 200 pages, 700 Engravings of Instruments, Suits, Caps, Belts, Pompons, Epaulets, Cap-Lamps, Stands, Drum Major's Staffs, and Hats, Sundry Band Outfits, Repairing Materials, also includes Instruction and Exercises for Amateur Bands, and a Catalogue of Choice Band Music.

ROOFING.
For steep or flat roofs. Applied by ordinary workmen at one-third the cost of tin. Circulars and samples free. Agents Wanted. T. NEW, 52 John Street, New York.

ESTABLISHED 18C
JOHN HOLLAND,
Manufacturer of



GOLD PENS,
Pen Holders, Pencil Cases, MacKinnon Stylographic and Elastic Fountain Pens. Over one million of our Gold Pens now in use, many of them more than twenty years old. If not sold by your stationer or jeweler, send for illustrated price list to 19 West 4th St., Cincinnati, O.

FOSSIL MEAL COMPOSITION,
The Leading Non-Conducting Covering
FOR BOILERS, PIPES, ETC.
With ¾ to ¾ inch thickness it radiates less heat than any other covering does with 2 inches.
Weighs very light, is very durable, fireproof, and is easily applied. Sold in a dry state by the pound.
Fully indorsed by Professor Ordway, Massachusetts Institute of Technology, Boston.
FOSSIL MEAL CO., 48 Cedar St., New York.

BOOKS ON BUILDING, PAINTING,
Decorating, etc. For 1883 eighty-eight-page Illustrated Catalogue, address, inclosing three 3-cent stamps, WM. T. COMSTOCK, 6 Astor Place, New York.

Best Boiler and Pipe Covering Made!

The Celebrated Patent Air Space
COVERING
For STEAM BOILERS and PIPES, HOT BLAST PIPING, etc., etc. Address CHALMERS SPENCE CO., 419 and 421 Eighth Street, New York.

SCIENTIFIC AMERICAN
FOR 1884.
The Most Popular Scientific Paper in the World.
ESTABLISHED 1846.
☞ Circulation Larger than all Papers of its Class Combined.
Only $3.20 a year, including postage to United States and Canada.
$4 a year, including postage to all countries in the Postal Union.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc.

All Classes of Readers find in the SCIENTIFIC AMERICAN a popular resume of the best scientific information of the day; and it is the aim of the publishers to present it in an attractive form, avoiding as much as possible abstruse terms. To every intelligent mind this journal affords a constant supply of instructive reading. It is promotive of knowledge and progress in every community where it circulates.

One copy of the SCIENTIFIC AMERICAN and one copy of the SCIENTIFIC AMERICAN SUPPLEMENT (see prospectus below) will be sent for one year, postage prepaid, to any subscriber in the United States or Canada, on receipt of **seven dollars** by the publishers.

The safest way to remit is by Postal Order, Draft, or Postal Note. Money carefully placed inside of envelopes, securely sealed, and correctly addressed seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to
MUNN & CO., 261 Broadway, New York.

Scientific American Supplement.

This is a distinct paper from THE SCIENTIFIC AMERICAN, but it is uniform in size with it, every number containing 16 octavo pages. THE SCIENTIFIC AMERICAN SUPPLEMENT embraces a very wide range of contents, covering the most recent and valuable contributions in Science, Mechanics, Architecture, and Engineering from every part of the world. Every number contains several illustrations, consisting in part of important engineering works, in progress or completed, both at home and abroad, architectural views of and plans of new public buildings, handsome dwelling-houses, cheap cottages, household furniture, etc.

Translations from French, German, and other foreign journals, accompanied with illustrations of Grand Engineering Works; also of Naval and Mechanical construction of magnitude, projected, progressing, and completed, at home and in all countries abroad.

The most important papers read at Scientific Conventions by the best and most profound thinkers, will be found in THE SCIENTIFIC AMERICAN SUPPLEMENT. This paper when preserved and bound, forms a most useful encyclopedia of information, and presents a complete history of the progress of the times in the Sciences, Arts, and Mechanical Engineering. This paper contains no advertisements.

Price—$5 a year, in advance; or one copy of THE SCIENTIFIC AMERICAN (see prospectus above) and one copy of THE SCIENTIFIC AMERICAN SUPPLEMENT both mailed for one year for $7, payment in advance to the publishers. Remit by mail and address
MUNN & CO.,
Publishers Scientific American,
261 Broadway, New York.

☞ MUNN & Co. have obtained for their clients, since establishing their Agency in 1846, more than one hundred thousand patents.

No other Patent Agency has better facilities for obtaining patents, trade marks, copyrights, etc., quickly and cheaply.

Inventions examined and advice as to patentability given free of charge.

Patents obtained in the United States, Canada, and all other countries on the best terms.

Pamphlets of information on obtaining Patents in this country and abroad sent free on application.

F. Brown's Patent
FRICTION CLUTCH.
Send for Illustrated Catalogue and Discount Sheet to
A. & F. BROWN, 43 Park Place, New York.
SHAFTS PULLEYS HANGERS

HARTFORD
STEAM BOILER
Inspection & Insurance
COMPANY.
W. B. FRANKLIN, V. Pres't. J. M. ALLEN, Pres't.
J. B. PIERCE, Sec'y.

Print Your Own Cards Labels, Etc., with our $3 Printing Press. Larger sizes for circulars, etc., $8 to $75. For young or old, business or pleasure. Everything easy, printed directions. Send two stamps for Catalogue of Presses, Type, Cards, etc., etc., to the factory. Kelsey & Co., Meriden, Ct.

STEAM PUMPS
Of every description and for every purpose. Boiler Feeding and Fire Pumps a specialty. Pumping returns from steam heating apparatus without the use of tanks or traps. Combined Pumps and Boilers for Railway Water Stations. Adopted by twenty-four leading R. R. lines.

SMITH, VAILE & CO., Dayton, O.
Send for descriptive catalogue.

ABSOLUTELY THE BEST. WILSON'S LIGHTNING SEWER!
Two thousand stitches a minute. The only absolutely first-class Sewing Machine in the world. Sent on trial. Warranted 5 years. Send for Illustrated Catalogue and Circular R. Agents Wanted. THE WILSON SEWING MACHINE CO., Chicago or New York.

SPEAKING TELEPHONES.
THE AMERICAN BELL TELEPHONE COMPANY,
W. H. FORBES, *President.* W. R. DRIVER, *Treasurer.* THEO. N. VAIL, *Gen. Manager.*

Alexander Graham Bell's patent of March 7, 1876, owned by this company, covers every form of apparatus including Microphones or Carbon Telephones, in which the voice of the speaker causes electric undulations corresponding to the words spoken, and which articulations produce similar articulate sounds at the receiver. The Commissioner of Patents and the U. S. Circuit Court have decided this to be the true meaning of his claim; the validity of the patent has been sustained in the Circuit on final hearing in a contested case, and many injunctions and final decrees have been obtained on them.

This company also owns and controls all the other telephonic inventions of Bell, Edison, Berliner, Gray, Blake, Phelps, Watson, and others.

(Descriptive catalogues forwarded on application.)

Telephones for Private Line, Club, and Social systems can be procured directly or through the authorized agents of the company.

All telephones obtained except from this company, or its authorized licensees, are infringements, and the makers, sellers, and users will be proceeded against.

Information furnished upon application.

Address all communications to the
AMERICAN BELL TELEPHONE COMPANY,
95 Milk Street, Boston, Mass.



Automatic Engines, 30 to 300 Horse Power.
Throttling Engines, 4 to 100 Horse Power.
Over 450 Engines and 10,000 Horse Power now in use.
Send for Illustrated Circular and Reference List, and
ASK OUR PRICES!
The Westinghouse Machine Co.,
PITTSBURG, PA.
Address, if more convenient, our Branch Offices: 24 Liberty St., NEW YORK, 14 South Canal St., CHICAGO, 401 Elm St., DALLAS, TEXAS.

PATENT
JACKET KETTLES,
Plain or Porcelain Lined. Tested to 100 lb. pressure. Send for Lists.
JAMES C. HAND & CO.,
614 and 616 Market St., Philadelphia, Pa.

PRINTING INKS.
THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts, Phila., and 47 Rose St., opp. Duane St., N. Y.